


ME 440
Intermediate Vibrations

Homework #3
due Thursday, October 5, 2017


Problem 1

A flywheel is mounted on a vertical shaft, as shown below. The shaft has a diameter d and length l and is fixed at both ends. The flywheel has a weight of W and a radius of gyration of r . Find the natural frequency of the longitudinal, the transverse, and the torsional vibration of the system.

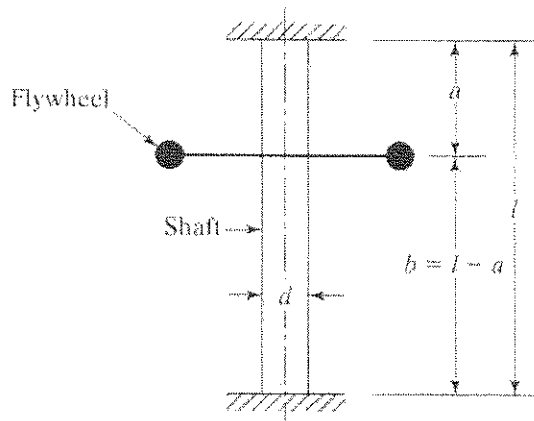

Problem 2

The uniform rigid bar OA of length L and mass m is pinned about point O . Using Newton's Second Law, find the equation of motion for the system using the generalized coordinate θ and also find the system's natural frequency.

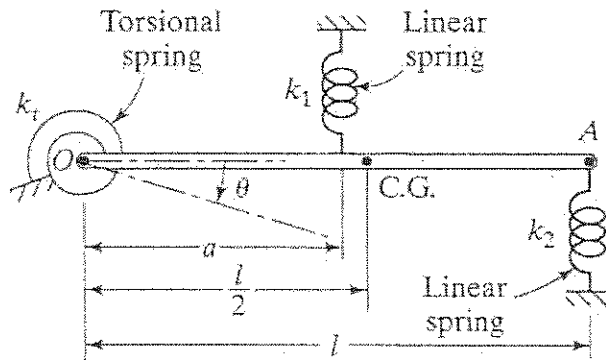

Solution -

Transverse :

$$\text{Deflection } y = \frac{Pb^2}{6EI l^3} \left[(2b-3l)a^3 + 3l(l-b)a^2 \right]$$

$$y = \frac{Pa^2b^2}{6EI l^3} \left[2ab - 3al + 3l^2 - 3lb \right]$$

$$y = \frac{Pa^3b^3}{3EI(a+b)^3}$$

$$k_{eq} = \frac{P}{y} = \frac{3EI(a+b)^3}{a^3b^3}$$

$$m_{eq} = \frac{W}{g}$$

$$\omega_n = \sqrt{\frac{k_{eq}}{m_{eq}}} = \sqrt{\frac{3EI(a+b)^3 g}{a^3 b^3 W}} \quad \text{where } I = \frac{\pi d^4}{64}$$

Torsional :

$$k_{eq} = (k_1)_t + (k_2)_t$$

$$k_{eq} = \frac{6J}{a} + \frac{6J}{b} = \frac{6J(a+b)}{ab}$$

$$\text{but } J = \frac{\pi d^4}{32}$$

$$k_{eq} = \frac{6\pi d^4}{32} \frac{(a+b)}{ab}$$

$$m_{eq} = \frac{I_0}{r^2} = m k^2 = m r^2$$

$r =$ radius of gyration

$$m_{eq} = \frac{W}{g} r^2$$

$$\omega_n = \sqrt{\frac{k_{eq}}{m_{eq}}} = \sqrt{\frac{6\pi d^4 (a+b) g}{32 ab W r^2}}$$


longitudinal :

$$k_{eq} = k_1 + k_2 = \frac{AE}{a} + \frac{AE}{b} = \frac{AE(a+b)}{ab}$$

$$m_{eq} = W/g$$

$$\omega_n = \sqrt{\frac{k_{eq}}{m_{eq}}} = \sqrt{\frac{AE(a+b)g}{abW}}$$

$$\text{where } A = \frac{\pi d^2}{4}$$

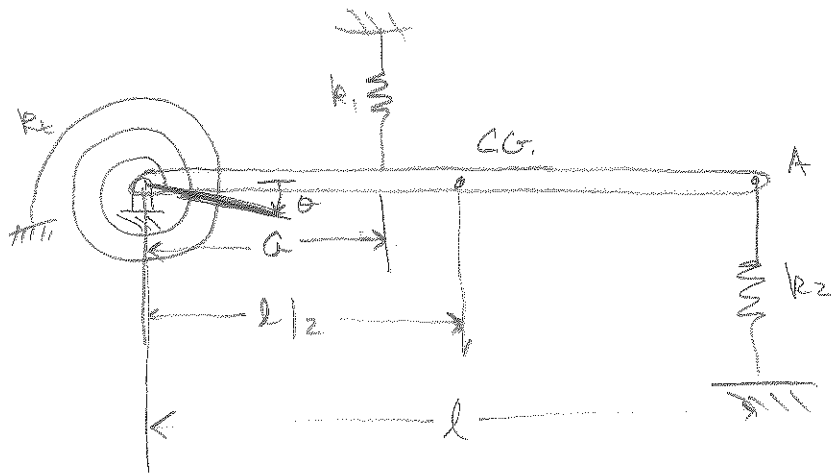


MASS $OA = m$

USE NEWTON'S 2ND LAW
TO FWD E.O.M.

AND ω_n

FBD (ASSUME SMALL $\theta, \dot{\theta}, \ddot{\theta}$)

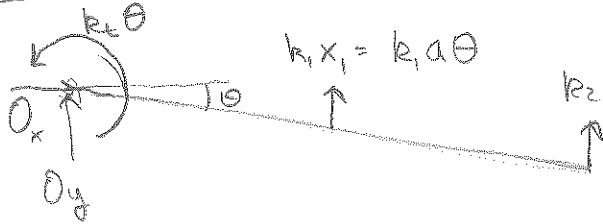

$I_0 \ddot{\theta}$



$$I_0 = \bar{I}_G + md^2$$

$$= \frac{1}{2} ml^2 + m \left(\frac{l}{2} \right)^2 = \frac{1}{3} ml^2$$

$$\sum M_0 = \sum M_{\text{eff}}$$

$$k_t \theta + (k_1 a \theta) a + (k_2 l \theta) l = -I_0 \ddot{\theta}$$

E.O.M.

$$\left[\frac{1}{3} ml^2 \ddot{\theta} + (k_t + k_1 a^2 + k_2 l^2) \theta = 0 \right]$$

$$\omega_n = \sqrt{\frac{3(k_t + k_1 a^2 + k_2 l^2)}{ml^2}}$$