

Computer algebra independent integration tests

Summer 2022 edition

4-Trig-functions/4.5-Secant/116-4.5.10-c+d-x-^m-a+b-sec-^n

Nasser M. Abbasi

September 27, 2022

Compiled on September 27, 2022 at 5:19pm

Contents

1	Introduction	3
2	detailed summary tables of results	19
3	Listing of integrals	35
4	Appendix	251

Chapter 1

Introduction

Local contents

1.1	Listing of CAS systems tested	4
1.2	Results	5
1.3	Time and leaf size Performance	9
1.4	list of integrals that has no closed form antiderivative	11
1.5	List of integrals solved by CAS but has no known antiderivative	12
1.6	list of integrals solved by CAS but failed verification	13
1.7	Timing	13
1.8	Verification	14
1.9	Important notes about some of the results	14
1.10	Design of the test system	17

This report gives the result of running the computer algebra independent integration test. The download section in the appendix contains links to download the problems in plain text format used for all CAS systems.

The number of integrals in this report is [46]. This is test number [116].

1.1 Listing of CAS systems tested

The following are the CAS systems tested:

1. Mathematica 13.1 (June 29, 2022) on windows 10.
2. Rubi 4.16.1 (Dec 19, 2018) on Mathematica 13.0.1 on windows 10.
3. Maple 2022.1 (June 1, 2022) on windows 10.
4. Maxima 5.46 (April 13, 2022) using Lisp SBCL 2.1.11.debian on Linux via sagemath 9.6.
5. Fricas 1.3.8 (June 21, 2022) based on sbcl 2.1.11.debian on Linux via sagemath 9.6.
6. Giac/Xcas 1.9.0-13 (July 3, 2022) on Linux via sagemath 9.6.
7. Sympy 1.10.1 (March 20, 2022) Using Python 3.10.4 on Linux.
8. Mupad using Matlab 2021a with Symbolic Math Toolbox Version 8.7 on windows 10.

Maxima and Fricas and Giac are called using Sagemath. This was done using Sagemath `integrate` command by changing the name of the algorithm to use the different CAS systems.

Sympy was called directly from Python.

1.2 Results

Important note: A number of problems in this test suite have no antiderivative in closed form. This means the antiderivative of these integrals can not be expressed in terms of elementary, special functions or Hypergeometric2F1 functions. RootSum and RootOf are not allowed.

If a CAS returns the above integral unevaluated within the time limit, then the result is counted as passed and assigned an A grade.

However, if CAS times out, then it is assigned an F grade even if the integral is not integrable, as this implies CAS could not determine that the integral is not integrable in the time limit.

If a CAS returns an antiderivative to such an integral, it is assigned an A grade automatically and this special result is listed in the introduction section of each individual test report to make it easy to identify as this can be important result to investigate.

The results given in in the table below reflects the above.

System	% solved	% Failed
Rubi	100.00 (46)	0.00 (0)
Mathematica	100.00 (46)	0.00 (0)
Fricas	100.00 (46)	0.00 (0)
Maple	91.30 (42)	8.70 (4)
Maxima	78.26 (36)	21.74 (10)
Mupad	52.17 (24)	47.83 (22)
Giac	52.17 (24)	47.83 (22)
Sympy	43.48 (20)	56.52 (26)

Table 1.1: Percentage solved for each CAS

The table below gives additional break down of the grading of quality of the antiderivatives generated by each CAS. The grading is given using the letters A,B,C and F with A being the best quality. The grading is accomplished by comparing the antiderivative generated with the optimal antiderivatives included in the test suite. The following table describes the meaning of these grades.

grade	description
A	Integral was solved and antiderivative is optimal in quality and leaf size.
B	Integral was solved and antiderivative is optimal in quality but leaf size is larger than twice the optimal antiderivatives leaf size.
C	Integral was solved and antiderivative is non-optimal in quality. This can be due to one or more of the following reasons <ol style="list-style-type: none"> 1. antiderivative contains a hypergeometric function and the optimal antiderivative does not. 2. antiderivative contains a special function and the optimal antiderivative does not. 3. antiderivative contains the imaginary unit and the optimal antiderivative does not.
F	Integral was not solved. Either the integral was returned unevaluated within the time limit, or it timed out, or CAS hanged or crashed or an exception was raised.


Table 1.2: Description of grading applied to integration result

Grading is implemented for all CAS systems. Based on the above, the following table summarizes the grading for this test suite.


System	% A grade	% B grade	% C grade	% F grade
Rubi	100.00	0.00	0.00	0.00
Mathematica	78.26	21.74	0.00	0.00
Maple	56.52	34.78	0.00	8.70
Fricas	52.17	47.83	0.00	0.00
Mupad	N/A	4.35	0.00	47.83
Giac	47.83	4.35	0.00	47.83
Maxima	47.83	30.43	0.00	21.74
Sympy	43.48	0.00	0.00	56.52

Table 1.3: Antiderivative Grade distribution of each CAS

The following is a Bar chart illustration of the data in the above table.

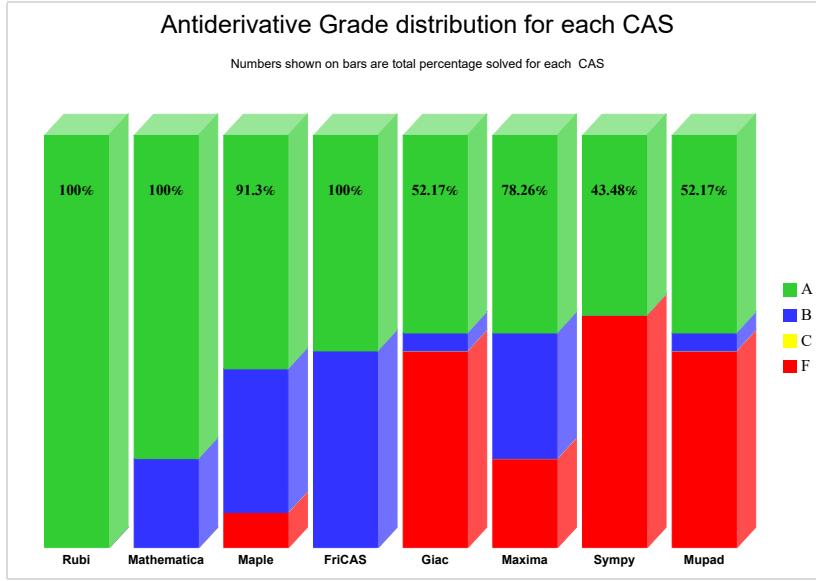

The figure below compares the CAS systems for each grade level.

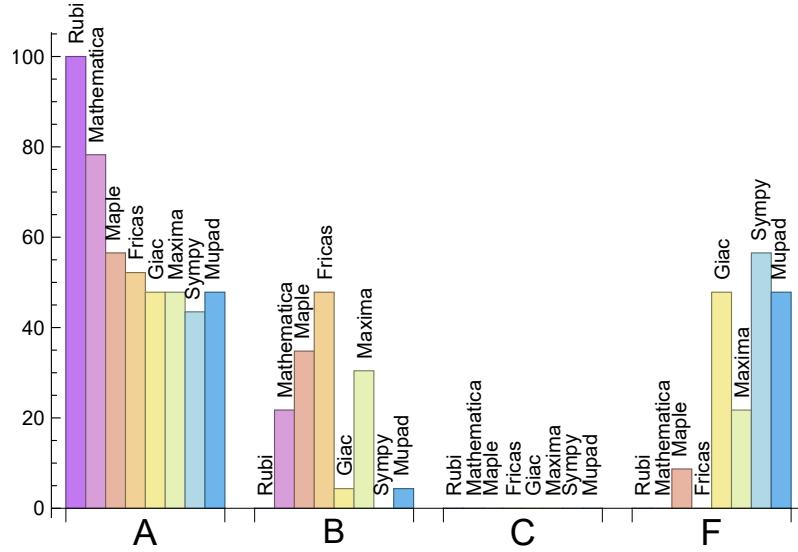

The following table shows the distribution of the different types of failure for each CAS. There are 3 types of reasons why it can fail. The first is when CAS returns back the input within the time limit, which means it could not solve it. This is the typical normal failure **F**.

The second is due to time out. CAS could not solve the integral within the 3 minutes time limit which is assigned **F(-1)**.

The third is due to an exception generated. Assigned **F(-2)**. This most likely indicates an interface problem between sagemath and the CAS (applicable only to FriCAS, Maxima and

Giac) or it could be an indication of an internal error in CAS. This type of error requires more investigations to determine the cause.

System	Number failed	Percentage normal failure	Percentage time-out failure	Percentage exception failure
Rubi	0	0.00 %	0.00 %	0.00 %
Mathematica	0	0.00 %	0.00 %	0.00 %
Maple	4	100.00 %	0.00 %	0.00 %
Fricas	0	0.00 %	0.00 %	0.00 %
Giac	22	100.00 %	0.00 %	0.00 %
Maxima	10	40.00 %	0.00 %	60.00 %
Sympy	26	92.31 %	7.69 %	0.00 %
Mupad	22	77.27 %	22.73 %	0.00 %

Table 1.4: Failure statistics for each CAS

1.3 Time and leaf size Performance

The table below summarizes the performance of each CAS system in terms of time used and leaf size of results.

Mean size is the average leaf size produced by the CAS (before any normalization). The Normalized mean is relative to the mean size of the optimal anti-derivative given in the input files.

For example, if CAS has **Normalized mean** of 3, then the mean size of its leaf size is 3 times as large as the mean size of the optimal leaf size.

Median size is value of leaf size where half the values are larger than this and half are smaller (before any normalization). i.e. The Middle value.


Similarly the **Normalized median** is relative to the median leaf size of the optimal.

For example, if a CAS has Normalized median of 1.2, then its median is 1.2 as large as the median leaf size of the optimal.

System	Mean time (sec)	Mean size	Normalized mean	Median size	Normalized median
Rubi	0.22	171.02	0.52	80.00	1.00
Mathematica	8.91	681.67	1.38	95.50	0.84
Maple	0.48	273.29	1.16	0.00	0.00
Maxima	0.31	624.44	2.61	0.00	0.00
Fricas	1.90	717.39	2.05	148.00	1.46
Sympy	0.00	0.00	0.00	0.00	0.00
Giac	0.05	46.83	0.42	0.00	0.00
Mupad	0.28	12.67	0.08	-1.00	-0.04

Table 1.5: Time and leaf size performance for each CAS

The following are bar charts for the normalized leafsize and time used from the above table.

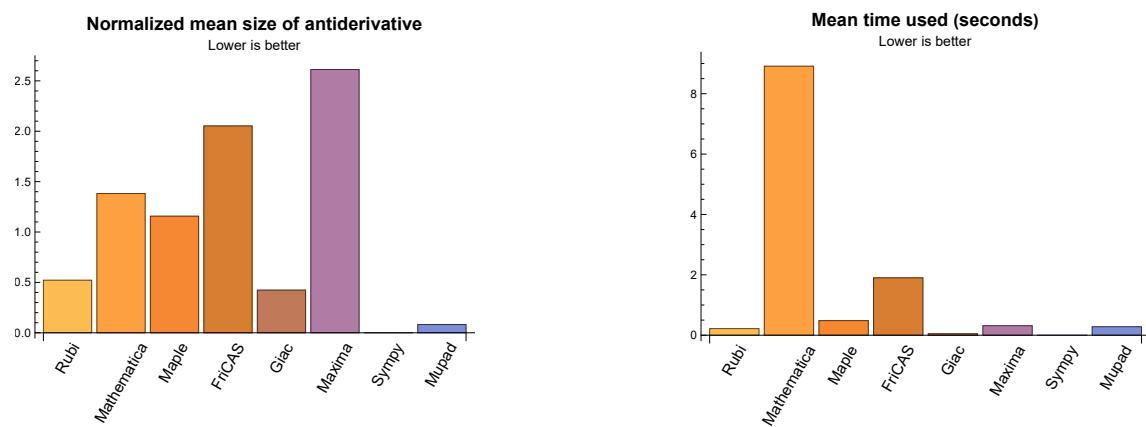

1.4 list of integrals that has no closed form antiderivative

{4, 5, 9, 10, 14, 15, 19, 20, 21, 22, 23, 27, 28, 32, 33, 37, 38, 42, 43, 44, 45, 46}

1.5 List of integrals solved by CAS but has no known antiderivative

Rubi {}

Mathematica {}

Maple {}

Maxima {}

Fricas {}

Sympy {}

Giac {}

Mupad {}

1.6 list of integrals solved by CAS but failed verification

The following are integrals solved by CAS but the verification phase failed to verify the anti-derivative produced is correct. This does not mean necessarily that the anti-derivative is wrong, as additional methods of verification might be needed, or more time is needed (3 minutes time limit was used). These integrals are listed here to make it easier to do further investigation to determine why it was not possible to verify the result produced.

Rubi {}

Mathematica {6, 7, 8, 12, 16, 17, 31, 39, 41}

Maple Verification phase not implemented yet.

Maxima Verification phase not implemented yet.

Fricas Verification phase not implemented yet.

Sympy Verification phase not implemented yet.

Giac Verification phase not implemented yet.

Mupad Verification phase not implemented yet.

1.7 Timing

The command `AbsoluteTiming[]` was used in Mathematica to obtain the elapsed time for each `integrate` call. In Maple, the command `Usage` was used as in the following example

```
cpu_time := Usage(assign ('result_of_int', int(expr, x)), output='realtime'
```

For all other CAS systems, the elapsed time to complete each integral was found by taking the difference between the time after the call completed from the time before the call was made. This was done using Python's `time.time()` call.

All elapsed times shown are in seconds. A time limit of 3 CPU minutes was used for each integral. If the `integrate` command did not complete within this time limit, the integral was aborted and considered to have failed and assigned an F grade. The time used by failed integrals due to time out was not counted in the final statistics.

1.8 Verification

A verification phase was applied on the result of integration for Rubi and Mathematica.

Future version of this report will implement verification for the other CAS systems. For the integrals whose result was not run through a verification phase, it is assumed that the antiderivative was correct.

Verification phase also had 3 minutes time out. An integral whose result was not verified could still be correct, but further investigation is needed on those integrals. These integrals were marked in the summary table below and also in each integral separate section so they are easy to identify and locate.

1.9 Important notes about some of the results

1.9.1 Important note about Maxima results

Since tests were run in a batch mode, and using an automated script, then any integral where Maxima needed an interactive response from the user to answer a question during the evaluation of the integral will fail.

The exception raised is `ValueError`. Therefore Maxima results is lower than what would result if Maxima was run directly and each question was answered correctly.

The percentage of such failures were not counted for each test file, but for an example, for the `Timofeev` test file, there were about 14 such integrals out of total 705, or about 2 percent. This percentage can be higher or lower depending on the specific input test file.

Such integrals can be identified by looking at the output of the integration in each section for Maxima. The exception message will indicate the cause of error.

Maxima `integrate` was run using SageMath with the following settings set by default

```
'besselexpand : true'
'display2d : false'
'domain : complex'
'keepfloat : true'
'load(to_poly_solve)'
'load(simplify_sum)'
'load(abs_integrate)' 'load(diag)'
```

SageMath automatic loading of Maxima `abs_integrate` was found to cause some problems. So the following code was added to disable this effect.

```
from sage.interfaces.maxima_lib import maxima_lib
maxima_lib.set('extra_definite_integration_methods', '[]')
```

```
maxima_lib.set('extra_integration_methods', '[]')
```

See <https://ask.sagemath.org/question/43088/integrate-results-that-are-different-from-using-maxima/> for reference.

1.9.2 Important note about FriCAS result

There were few integrals which failed due to SageMath interface and not because FriCAS system could not do the integration.

These will fail With error `Exception raised: NotImplementedError.`

The number of such cases seems to be very small. About 1 or 2 percent of all integrals. These can be identified by looking at the exception message given in the result.

1.9.3 Important note about finding leaf size of antiderivative

For Mathematica, Rubi, and Maple, the builtin system function `LeafSize` was used to find the leaf size of each antiderivative.

The other CAS systems (SageMath and Sympy) do not have special builtin function for this purpose at this time. Therefore the leaf size for Fricas and Sympy antiderivative was determined using the following function, thanks to user `slelievre` at https://ask.sagemath.org/question/57123/could-we-have-a-leaf_count-function-in-base-sagemath/

```
def tree_size(expr):
    """
    Return the tree size of this expression.
    """
    if expr not in SR:
        # deal with lists, tuples, vectors
        return 1 + sum(tree_size(a) for a in expr)
    expr = SR(expr)
    x, aa = expr.operator(), expr.operands()
    if x is None:
        return 1
    else:
        return 1 + sum(tree_size(a) for a in aa)
```

For Sympy, which was called directly from Python, the following code was used to obtain the leafsize of its result

```
try:
    # 1.7 is a fudge factor since it is low side from actual leaf count
    leafCount = round(1.7*count_ops(anti))

except Exception as ee:
    leafCount = 1
```

1.9.4 Important note about Mupad results

Matlab's symbolic toolbox does not have a leaf count function to measure the size of the antiderivative. Maple was used to determine the leaf size of Mupad output by post processing Mupad result.

Currently no grading of the antiderivative for Mupad is implemented. If it can integrate the problem, it was assigned a B grade automatically as a placeholder. In the future, when grading function is implemented for Mupad, the tests will be rerun again.

The following is an example of using Matlab's symbolic toolbox (Mupad) to solve an integral

```
integrand = evalin(symengine, 'cos(x)*sin(x)')
the_variable = evalin(symengine, 'x')
anti = int(integrand, the_variable)
```

Which gives $\sin(x)^{2/2}$

1.10 Design of the test system

The following diagram gives a high level view of the current test build system.



1. integer, the problem number.
2. integer. 0 for failed, 1 for passed, -1 for timeout, -2 for CAS specific exception. (this is not the grade field)
3. integer. Leaf size of result.
4. integer. Leaf size of the optimal antiderivative.
5. number. CPU time used to solve this integral. 0 if failed.
6. string. The integral in Latex format
7. string. The input used in CAS own syntax.
8. string. The result (antiderivative) produced by CAS in Latex format
9. string. The optimal antiderivative in Latex format.
10. integer. 0 or 1. Indicates if problem has known antiderivative or not
11. String. The result (antiderivative) in CAS own syntax.
12. String. The grade of the antiderivative. Can be "A", "B", "C", or "F"
13. String. Small string description of why the grade was given.
14. integer. 1 if result was verified or 0 if not verified.

The following fields are present only in Rubi Table file

15. integer. Number of steps used.
16. integer. Number of rules used.
17. integer. Integrand leaf size.
18. real number. Ratio. Field 16 over field 17
19. String of form "{n,n,...}" which is list of the rules used by Rubi
20. String. The optimal antiderivative in Mathematica syntax

Chapter 2

detailed summary tables of results

Local contents

2.1	List of integrals sorted by grade for each CAS	20
2.2	Detailed conclusion table per each integral for all CAS systems	23
2.3	Detailed conclusion table specific for Rubi results	33

2.1 List of integrals sorted by grade for each CAS

Local contents

2.1.1	Rubi	21
2.1.2	Mathematica	21
2.1.3	Maple	21
2.1.4	Maxima	21
2.1.5	FriCAS	22
2.1.6	Sympy	22
2.1.7	Giac	22
2.1.8	Mupad	22

2.1.1 Rubi

A grade: { 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46 }

B grade: { }

C grade: { }

F grade: { }

2.1.2 Mathematica

A grade: { 1, 2, 3, 4, 5, 7, 9, 10, 11, 13, 14, 15, 18, 19, 20, 21, 22, 23, 25, 26, 27, 28, 30, 32, 33, 34, 35, 36, 37, 38, 41, 42, 43, 44, 45, 46 }

B grade: { 6, 8, 12, 16, 17, 24, 29, 31, 39, 40 }

C grade: { }

F grade: { }

2.1.3 Maple

A grade: { 4, 5, 8, 9, 10, 13, 14, 15, 18, 19, 20, 21, 22, 23, 27, 28, 31, 32, 33, 37, 38, 42, 43, 44, 45, 46 }

B grade: { 1, 2, 3, 6, 7, 11, 12, 16, 17, 24, 25, 26, 29, 30, 36, 41 }

C grade: { }

F grade: { 34, 35, 39, 40 }

2.1.4 Maxima

A grade: { 4, 5, 9, 10, 14, 15, 19, 20, 21, 22, 23, 27, 28, 32, 33, 37, 38, 42, 43, 44, 45, 46 }

B grade: { 1, 2, 6, 7, 11, 12, 13, 16, 17, 18, 24, 25, 29, 30 }

C grade: { }

F grade: { 3, 8, 26, 31, 34, 35, 36, 39, 40, 41 }

2.1.5 FriCAS

A grade: { 4, 5, 9, 10, 13, 14, 15, 18, 19, 20, 21, 22, 23, 27, 28, 32, 33, 37, 38, 42, 43, 44, 45, 46 }

B grade: { 1, 2, 3, 6, 7, 8, 11, 12, 16, 17, 24, 25, 26, 29, 30, 31, 34, 35, 36, 39, 40, 41 }

C grade: { }

F grade: { }

2.1.6 Sympy

A grade: { 4, 5, 9, 10, 14, 15, 19, 20, 22, 23, 27, 28, 32, 33, 37, 38, 42, 43, 45, 46 }

B grade: { }

C grade: { }

F grade: { 1, 2, 3, 6, 7, 8, 11, 12, 13, 16, 17, 18, 21, 24, 25, 26, 29, 30, 31, 34, 35, 36, 39, 40, 41, 44 }

2.1.7 Giac

A grade: { 4, 5, 9, 10, 14, 15, 19, 20, 21, 22, 23, 27, 28, 32, 33, 37, 38, 42, 43, 44, 45, 46 }

B grade: { 13, 18 }

C grade: { }

F grade: { 1, 2, 3, 6, 7, 8, 11, 12, 16, 17, 24, 25, 26, 29, 30, 31, 34, 35, 36, 39, 40, 41 }

2.1.8 Mupad

A grade: { 4, 5, 9, 10, 14, 15, 19, 20, 21, 22, 23, 27, 28, 32, 33, 37, 38, 42, 43, 44, 45, 46 }

B grade: { 13, 18 }

C grade: { }

F grade: { 1, 2, 3, 6, 7, 8, 11, 12, 16, 17, 24, 25, 26, 29, 30, 31, 34, 35, 36, 39, 40, 41 }

2.2 Detailed conclusion table per each integral for all CAS systems

Detailed conclusion table per each integral is given by table below. The elapsed time is in seconds. For failed result it is given as F(-1) if the failure was due to timeout. It is given as F(-2) if the failure was due to an exception being raised, which could indicate a bug in the system. If the failure was due to integral not being evaluated within the time limit, then it is given just an F.

In this table, the column N.S. in the table below, which stands for **normalized size** is defined as $\frac{\text{antiderivative leaf size}}{\text{optimal antiderivative leaf size}}$. To help make the table fit, **Mathematica** was abbreviated to MMA.

	Problem 1	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
MMA	grade	A	A	A	B	B	B	F	F	F
	verified	N/A	Yes	Yes	TBD	TBD	TBD	TBD	TBD	TBD
	size	227	227	218	756	995	1117	0	0	-1
	N.S.	1	1.00	0.96	3.33	4.38	4.92	0.00	0.00	-0.00
	time (sec)	N/A	0.151	0.125	0.740	0.663	3.039	0.000	0.000	0.000

	Problem 2	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
MMA	grade	A	A	A	B	B	B	F	F	F
	verified	N/A	Yes	Yes	TBD	TBD	TBD	TBD	TBD	TBD
	size	157	157	151	440	559	707	0	0	-1
	N.S.	1	1.00	0.96	2.80	3.56	4.50	0.00	0.00	-0.01
	time (sec)	N/A	0.105	0.161	0.636	0.635	3.349	0.000	0.000	0.000

	Problem 3	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
MMA	grade	A	A	A	B	F	B	F	F	F
	verified	N/A	Yes	Yes	TBD	TBD	TBD	TBD	TBD	TBD
	size	93	93	87	166	0	375	0	0	-1
	N.S.	1	1.00	0.94	1.78	0.00	4.03	0.00	0.00	-0.01
	time (sec)	N/A	0.050	0.061	0.435	0.000	3.412	0.000	0.000	0.000

Problem 4	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	A	A	A	A	A	A
verified	N/A	N/A	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	21	0	0	0	0	0	0	0	-1
N.S.	1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-0.05
time (sec)	N/A	0.019	6.432	0.256	0.000	0.000	0.000	0.000	0.000

Problem 5	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	A	A	A	A	A	A
verified	N/A	N/A	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	21	0	0	0	0	0	0	0	-1
N.S.	1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-0.05
time (sec)	N/A	0.018	6.420	0.269	0.000	0.000	0.000	0.000	0.000

Problem 6	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	A	A	B	B	B	B	F	F	F
verified	N/A	Yes	NO	TBD	TBD	TBD	TBD	TBD	TBD
size	371	371	811	1517	3584	1940	0	0	-1
N.S.	1	1.00	2.19	4.09	9.66	5.23	0.00	0.00	-0.00
time (sec)	N/A	0.321	8.566	1.096	0.947	3.444	0.000	0.000	0.000

Problem 7	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	A	A	A	B	B	B	F	F	F
verified	N/A	Yes	NO	TBD	TBD	TBD	TBD	TBD	TBD
size	262	262	505	679	1829	1151	0	0	-1
N.S.	1	1.00	1.93	2.59	6.98	4.39	0.00	0.00	-0.00
time (sec)	N/A	0.222	5.713	0.874	0.695	3.411	0.000	0.000	0.000

Problem 8	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	A	A	B	A	F	B	F	F	F
verified	N/A	Yes	NO	TBD	TBD	TBD	TBD	TBD	TBD
size	134	134	330	235	0	572	0	0	-1
N.S.	1	1.00	2.46	1.75	0.00	4.27	0.00	0.00	-0.01
time (sec)	N/A	0.087	5.574	0.565	0.000	2.930	0.000	0.000	0.000

Problem 9	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	A	A	A	A	A	A
verified	N/A	N/A	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	23	0	0	0	0	0	0	0	-1
N.S.	1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-0.04
time (sec)	N/A	0.034	29.384	0.368	0.000	0.000	0.000	0.000	0.000

Problem 10	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	A	A	A	A	A	A
verified	N/A	N/A	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	23	0	0	0	0	0	0	0	-1
N.S.	1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-0.04
time (sec)	N/A	0.033	27.954	0.417	0.000	0.000	0.000	0.000	0.000

Problem 11	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	A	A	A	B	B	B	F	F	F
verified	N/A	Yes	Yes	TBD	TBD	TBD	TBD	TBD	TBD
size	152	152	253	417	1364	537	0	0	-1
N.S.	1	1.00	1.66	2.74	8.97	3.53	0.00	0.00	-0.01
time (sec)	N/A	0.227	1.534	0.760	0.687	2.525	0.000	0.000	0.000

Problem 12	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	A	A	B	B	B	B	F	F	F
verified	N/A	Yes	NO	TBD	TBD	TBD	TBD	TBD	TBD
size	119	119	528	236	393	307	0	0	-1
N.S.	1	1.00	4.44	1.98	3.30	2.58	0.00	0.00	-0.01
time (sec)	N/A	0.174	6.370	0.657	0.671	3.298	0.000	0.000	0.000

Problem 13	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	A	A	A	A	B	A	F	B	B
verified	N/A	Yes	Yes	TBD	TBD	TBD	TBD	TBD	TBD
size	67	67	104	76	300	104	0	274	79
N.S.	1	1.00	1.55	1.13	4.48	1.55	0.00	4.09	1.18
time (sec)	N/A	0.070	0.707	0.391	0.534	3.189	0.000	0.480	0.757

Problem 14	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	A	A	A	A	A	A
verified	N/A	N/A	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	23	0	0	0	0	0	0	0	-1
N.S.	1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-0.04
time (sec)	N/A	0.039	7.311	0.299	0.000	0.000	0.000	0.000	0.000

Problem 15	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	A	A	A	A	A	A
verified	N/A	N/A	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	23	0	0	0	0	0	0	0	-1
N.S.	1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-0.04
time (sec)	N/A	0.036	5.313	0.264	0.000	0.000	0.000	0.000	0.000

Problem 16	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	A	A	B	B	B	B	F	F	F(-1)
verified	N/A	Yes	NO	TBD	TBD	TBD	TBD	TBD	TBD
size	288	288	1455	810	4460	963	0	0	-1
N.S.	1	1.00	5.05	2.81	15.49	3.34	0.00	0.00	-0.00
time (sec)	N/A	0.490	7.192	0.804	1.792	3.934	0.000	0.000	0.000

Problem 17	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	A	A	B	B	B	B	F	F	F(-1)
verified	N/A	Yes	NO	TBD	TBD	TBD	TBD	TBD	TBD
size	229	229	925	453	1071	515	0	0	-1
N.S.	1	1.00	4.04	1.98	4.68	2.25	0.00	0.00	-0.00
time (sec)	N/A	0.361	6.668	0.653	1.128	3.525	0.000	0.000	0.000

Problem 18	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	A	A	A	A	B	A	F	B	B
verified	N/A	Yes	Yes	TBD	TBD	TBD	TBD	TBD	TBD
size	140	140	172	143	1157	192	0	850	247
N.S.	1	1.00	1.23	1.02	8.26	1.37	0.00	6.07	1.76
time (sec)	N/A	0.136	1.635	0.449	0.661	3.035	0.000	0.690	5.983

Problem 19	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	A	A	A	A	A	A
verified	N/A	N/A	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	23	0	0	0	0	0	0	0	-1
N.S.	1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-0.04
time (sec)	N/A	0.039	14.805	0.299	0.000	0.000	0.000	0.000	0.000

Problem 20	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	A	A	A	A	A	A
verified	N/A	N/A	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	23	0	0	0	0	0	0	0	-1
N.S.	1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-0.04
time (sec)	N/A	0.035	17.116	0.289	0.000	0.000	0.000	0.000	0.000

Problem 21	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	A	A	A	F(-1)	A	A
verified	N/A	N/A	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	23	0	0	0	0	0	0	0	-1
N.S.	1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-0.04
time (sec)	N/A	0.033	0.860	0.500	0.000	0.000	0.000	0.000	0.000

Problem 22	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	A	A	A	A	A	A
verified	N/A	N/A	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	21	0	0	0	0	0	0	0	-1
N.S.	1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-0.05
time (sec)	N/A	0.018	6.575	0.314	0.000	0.000	0.000	0.000	0.000

Problem 23	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	A	A	A	A	A	A
verified	N/A	N/A	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	23	0	0	0	0	0	0	0	-1
N.S.	1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-0.04
time (sec)	N/A	0.037	0.961	0.287	0.000	0.000	0.000	0.000	0.000

Problem 24	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	A	A	B	B	B	B	F	F	F
verified	N/A	Yes	Yes	TBD	TBD	TBD	TBD	TBD	TBD
size	227	227	474	756	995	1117	0	0	-1
N.S.	1	1.00	2.09	3.33	4.38	4.92	0.00	0.00	-0.00
time (sec)	N/A	0.149	0.684	0.686	0.644	3.222	0.000	0.000	0.000

Problem 25	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	A	A	A	B	B	B	F	F	F
verified	N/A	Yes	Yes	TBD	TBD	TBD	TBD	TBD	TBD
size	157	157	281	440	559	707	0	0	-1
N.S.	1	1.00	1.79	2.80	3.56	4.50	0.00	0.00	-0.01
time (sec)	N/A	0.103	0.469	0.676	0.593	4.613	0.000	0.000	0.000

Problem 26	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	A	A	A	B	F	B	F	F	F
verified	N/A	Yes	Yes	TBD	TBD	TBD	TBD	TBD	TBD
size	93	93	104	166	0	375	0	0	-1
N.S.	1	1.00	1.12	1.78	0.00	4.03	0.00	0.00	-0.01
time (sec)	N/A	0.049	0.020	0.357	0.000	3.658	0.000	0.000	0.000

Problem 27	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	A	A	A	A	A	A
verified	N/A	N/A	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	21	0	0	0	0	0	0	0	-1
N.S.	1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-0.05
time (sec)	N/A	0.020	0.936	0.285	0.000	0.000	0.000	0.000	0.000

Problem 28	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	A	A	A	A	A	A
verified	N/A	N/A	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	21	0	0	0	0	0	0	0	-1
N.S.	1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-0.05
time (sec)	N/A	0.019	1.364	0.270	0.000	0.000	0.000	0.000	0.000

Problem 29	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	A	A	B	B	B	B	F	F	F
verified	N/A	Yes	Yes	TBD	TBD	TBD	TBD	TBD	TBD
size	364	364	1700	1489	3448	1876	0	0	-1
N.S.	1	1.00	4.67	4.09	9.47	5.15	0.00	0.00	-0.00
time (sec)	N/A	0.319	10.132	1.172	0.940	4.282	0.000	0.000	0.000

Problem 30	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	A	A	A	B	B	B	F	F	F
verified	N/A	Yes	Yes	TBD	TBD	TBD	TBD	TBD	TBD
size	257	257	503	662	1766	1111	0	0	-1
N.S.	1	1.00	1.96	2.58	6.87	4.32	0.00	0.00	-0.00
time (sec)	N/A	0.210	7.924	0.796	0.702	3.381	0.000	0.000	0.000

Problem 31	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	A	A	B	A	F	B	F	F	F
verified	N/A	Yes	NO	TBD	TBD	TBD	TBD	TBD	TBD
size	131	131	566	232	0	552	0	0	-1
N.S.	1	1.00	4.32	1.77	0.00	4.21	0.00	0.00	-0.01
time (sec)	N/A	0.083	4.363	0.561	0.000	3.299	0.000	0.000	0.000

Problem 32	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	A	A	A	A	A	A
verified	N/A	N/A	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	23	0	0	0	0	0	0	0	-1
N.S.	1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-0.04
time (sec)	N/A	0.035	38.280	0.271	0.000	0.000	0.000	0.000	0.000

Problem 33	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	A	A	A	A	A	A
verified	N/A	N/A	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	23	0	0	0	0	0	0	0	-1
N.S.	1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-0.04
time (sec)	N/A	0.034	29.234	0.294	0.000	0.000	0.000	0.000	0.000

Problem 34	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	A	A	A	F	F(-2)	B	F	F	F
verified	N/A	Yes	Yes	TBD	TBD	TBD	TBD	TBD	TBD
size	526	526	449	0	0	2373	0	0	-1
N.S.	1	1.00	0.85	0.00	0.00	4.51	0.00	0.00	-0.00
time (sec)	N/A	0.738	0.968	0.294	0.000	6.700	0.000	0.000	0.000

Problem 35	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	A	A	A	F	F(-2)	B	F	F	F
verified	N/A	Yes	Yes	TBD	TBD	TBD	TBD	TBD	TBD
size	394	394	338	0	0	1681	0	0	-1
N.S.	1	1.00	0.86	0.00	0.00	4.27	0.00	0.00	-0.00
time (sec)	N/A	0.615	0.742	0.303	0.000	4.163	0.000	0.000	0.000

Problem 36	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	A	A	A	B	F(-2)	B	F	F	F
verified	N/A	Yes	Yes	TBD	TBD	TBD	TBD	TBD	TBD
size	257	257	214	516	0	1089	0	0	-1
N.S.	1	1.00	0.83	2.01	0.00	4.24	0.00	0.00	-0.00
time (sec)	N/A	0.336	0.443	0.579	0.000	4.046	0.000	0.000	0.000

Problem 37	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	A	A	A	A	A	A
verified	N/A	N/A	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	23	0	0	0	0	0	0	0	-1
N.S.	1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-0.04
time (sec)	N/A	0.040	1.556	0.245	0.000	0.000	0.000	0.000	0.000

Problem 38	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	A	A	A	A	A	A
verified	N/A	N/A	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	23	0	0	0	0	0	0	0	-1
N.S.	1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-0.04
time (sec)	N/A	0.038	10.362	0.246	0.000	0.000	0.000	0.000	0.000

Problem 39	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	A	A	B	F	F(-2)	B	F	F	F(-1)
verified	N/A	Yes	NO	TBD	TBD	TBD	TBD	TBD	TBD
size	1523	1523	9005	0	0	7103	0	0	-1
N.S.	1	1.00	5.91	0.00	0.00	4.66	0.00	0.00	-0.00
time (sec)	N/A	2.046	27.097	0.313	0.000	3.538	0.000	0.000	0.000

Problem 40	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	A	A	B	F	F(-2)	B	F	F	F(-1)
verified	N/A	Yes	Yes	TBD	TBD	TBD	TBD	TBD	TBD
size	1117	1117	11147	0	0	4381	0	0	-1
N.S.	1	1.00	9.98	0.00	0.00	3.92	0.00	0.00	-0.00
time (sec)	N/A	1.539	22.387	0.356	0.000	3.846	0.000	0.000	0.000

Problem 41	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	A	A	A	B	F(-2)	B	F	F	F(-1)
verified	N/A	Yes	NO	TBD	TBD	TBD	TBD	TBD	TBD
size	582	582	1037	1289	0	2155	0	0	-1
N.S.	1	1.00	1.78	2.21	0.00	3.70	0.00	0.00	-0.00
time (sec)	N/A	0.729	9.801	0.717	0.000	3.609	0.000	0.000	0.000

Problem 42	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	A	A	A	A	A	A
verified	N/A	N/A	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	23	0	0	0	0	0	0	0	-1
N.S.	1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-0.04
time (sec)	N/A	0.039	28.357	0.276	0.000	0.000	0.000	0.000	0.000

Problem 43	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	A	A	A	A	A	A
verified	N/A	N/A	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	23	0	0	0	0	0	0	0	-1
N.S.	1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-0.04
time (sec)	N/A	0.036	44.518	0.302	0.000	0.000	0.000	0.000	0.000

Problem 44	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	A	A	A	F(-1)	A	A
verified	N/A	N/A	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	23	0	0	0	0	0	0	0	-1
N.S.	1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-0.04
time (sec)	N/A	0.033	1.727	0.385	0.000	0.000	0.000	0.000	0.000

Problem 45	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	A	A	A	A	A	A
verified	N/A	N/A	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	21	0	0	0	0	0	0	0	-1
N.S.	1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-0.05
time (sec)	N/A	0.018	0.478	0.281	0.000	0.000	0.000	0.000	0.000

Problem 46	Optimal	Rubi	MMA	Maple	Maxima	Fricas	Sympy	Giac	Mupad
grade	N/A	A	A	A	A	A	A	A	A
verified	N/A	N/A	N/A	TBD	TBD	TBD	TBD	TBD	TBD
size	23	0	0	0	0	0	0	0	-1
N.S.	1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-0.04
time (sec)	N/A	0.038	0.610	0.241	0.000	0.000	0.000	0.000	0.000

2.3 Detailed conclusion table specific for Rubi results

The following table is specific to Rubi. It gives additional statistics for each integral. the column **steps** is the number of steps used by Rubi to obtain the antiderivative. The **rules** column is the number of unique rules used. The **integrand size** column is the leaf size of the integrand. Finally the ratio $\frac{\text{number of rules}}{\text{integrand size}}$ is given. The larger this ratio is, the harder the integral was to solve. In this test, problem number [6] had the largest ratio of [20]

Table 2.1: Rubi specific breakdown of results for each integral

#	grade	number of steps used	number of unique rules	normalized antiderivative leaf size	integrand leaf size	$\frac{\text{number of rules}}{\text{integrand leaf size}}$
1	A	11	6	1.00	18	0.333
2	A	9	5	1.00	18	0.278
3	A	7	4	1.00	16	0.250
4	A	0	0	0.00	0	0.000
5	A	0	0	0.00	0	0.000
6	A	17	9	1.00	20	0.450
7	A	14	10	1.00	20	0.500
8	A	9	6	1.00	18	0.333
9	A	0	0	0.00	0	0.000
10	A	0	0	0.00	0	0.000
11	A	9	8	1.00	20	0.400
12	A	8	7	1.00	20	0.350
13	A	5	4	1.00	18	0.222
14	A	0	0	0.00	0	0.000
15	A	0	0	0.00	0	0.000
16	A	19	10	1.00	20	0.500
17	A	17	10	1.00	20	0.500
18	A	9	5	1.00	18	0.278
19	A	0	0	0.00	0	0.000
20	A	0	0	0.00	0	0.000
21	A	0	0	0.00	0	0.000
22	A	0	0	0.00	0	0.000
23	A	0	0	0.00	0	0.000
24	A	11	6	1.00	18	0.333
25	A	9	5	1.00	18	0.278

Continued on next page

Table 2.1 – continued from previous page

#	grade	number of steps used	number of unique rules	normalized antiderivative leaf size	integrand leaf size	<u>number of rules</u> <u>integrand leaf size</u>
26	A	7	4	1.00	16	0.250
27	A	0	0	0.00	0	0.000
28	A	0	0	0.00	0	0.000
29	A	17	9	1.00	20	0.450
30	A	14	10	1.00	20	0.500
31	A	9	6	1.00	18	0.333
32	A	0	0	0.00	0	0.000
33	A	0	0	0.00	0	0.000
34	A	14	8	1.00	20	0.400
35	A	12	7	1.00	20	0.350
36	A	10	6	1.00	18	0.333
37	A	0	0	0.00	0	0.000
38	A	0	0	0.00	0	0.000
39	A	36	10	1.00	20	0.500
40	A	30	11	1.00	20	0.550
41	A	21	9	1.00	18	0.500
42	A	0	0	0.00	0	0.000
43	A	0	0	0.00	0	0.000
44	A	0	0	0.00	0	0.000
45	A	0	0	0.00	0	0.000
46	A	0	0	0.00	0	0.000

Chapter 3

Listing of integrals

Local contents

3.1	$\int (c+dx)^3(a+a \sec(e+fx)) dx$	36
3.2	$\int (c+dx)^2(a+a \sec(e+fx)) dx$	42
3.3	$\int (c+dx)(a+a \sec(e+fx)) dx$	47
3.4	$\int \frac{a+a \sec(e+fx)}{c+dx} dx$	51
3.5	$\int \frac{a+a \sec(e+fx)}{(c+dx)^2} dx$	54
3.6	$\int (c+dx)^3(a+a \sec(e+fx))^2 dx$	57
3.7	$\int (c+dx)^2(a+a \sec(e+fx))^2 dx$	65
3.8	$\int (c+dx)(a+a \sec(e+fx))^2 dx$	72
3.9	$\int \frac{(a+a \sec(e+fx))^2}{c+dx} dx$	77
3.10	$\int \frac{(a+a \sec(e+fx))^2}{(c+dx)^2} dx$	80
3.11	$\int \frac{(c+dx)^3}{a+a \sec(e+fx)} dx$	83
3.12	$\int \frac{(c+dx)^2}{a+a \sec(e+fx)} dx$	89
3.13	$\int \frac{c+dx}{a+a \sec(e+fx)} dx$	94
3.14	$\int \frac{1}{(c+dx)(a+a \sec(e+fx))} dx$	98
3.15	$\int \frac{1}{(c+dx)^2(a+a \sec(e+fx))} dx$	101
3.16	$\int \frac{(c+dx)^3}{(a+a \sec(e+fx))^2} dx$	104
3.17	$\int \frac{(c+dx)^2}{(a+a \sec(e+fx))^2} dx$	112
3.18	$\int \frac{c+dx}{(a+a \sec(e+fx))^2} dx$	118
3.19	$\int \frac{1}{(c+dx)(a+a \sec(e+fx))^2} dx$	123
3.20	$\int \frac{1}{(c+dx)^2(a+a \sec(e+fx))^2} dx$	127
3.21	$\int (c+dx)^m(a+a \sec(e+fx))^n dx$	131
3.22	$\int (c+dx)^m(a+a \sec(e+fx)) dx$	133
3.23	$\int \frac{(c+dx)^m}{a+a \sec(e+fx)} dx$	136
3.24	$\int (c+dx)^3(a+b \sec(e+fx)) dx$	139

3.25	$\int (c+dx)^2(a+b \sec(e+fx)) dx$	145
3.26	$\int (c+dx)(a+b \sec(e+fx)) dx$	150
3.27	$\int \frac{a+b \sec(e+fx)}{c+dx} dx$	154
3.28	$\int \frac{a+b \sec(e+fx)}{(c+dx)^2} dx$	157
3.29	$\int (c+dx)^3(a+b \sec(e+fx))^2 dx$	160
3.30	$\int (c+dx)^2(a+b \sec(e+fx))^2 dx$	169
3.31	$\int (c+dx)(a+b \sec(e+fx))^2 dx$	176
3.32	$\int \frac{(a+b \sec(e+fx))^2}{c+dx} dx$	181
3.33	$\int \frac{(a+b \sec(e+fx))^2}{(c+dx)^2} dx$	184
3.34	$\int \frac{(c+dx)^3}{a+b \sec(e+fx)} dx$	187
3.35	$\int \frac{(c+dx)^2}{a+b \sec(e+fx)} dx$	193
3.36	$\int \frac{c+dx}{a+b \sec(e+fx)} dx$	199
3.37	$\int \frac{1}{(c+dx)(a+b \sec(e+fx))} dx$	205
3.38	$\int \frac{1}{(c+dx)^2(a+b \sec(e+fx))} dx$	208
3.39	$\int \frac{(c+dx)^3}{(a+b \sec(e+fx))^2} dx$	211
3.40	$\int \frac{(c+dx)^2}{(a+b \sec(e+fx))^2} dx$	219
3.41	$\int \frac{c+dx}{(a+b \sec(e+fx))^2} dx$	227
3.42	$\int \frac{1}{(c+dx)(a+b \sec(e+fx))^2} dx$	234
3.43	$\int \frac{1}{(c+dx)^2(a+b \sec(e+fx))^2} dx$	238
3.44	$\int (c+dx)^m(a+b \sec(e+fx))^n dx$	242
3.45	$\int (c+dx)^m(a+b \sec(e+fx)) dx$	244
3.46	$\int \frac{(c+dx)^m}{a+b \sec(e+fx)} dx$	247

$$3.1 \quad \int (c + dx)^3 (a + a \sec(e + fx)) dx$$

Optimal. Leaf size=227

$$\frac{a(c+dx)^4}{4d} - \frac{2ia(c+dx)^3 \operatorname{ArcTan}(e^{i(e+fx)})}{f} + \frac{3iad(c+dx)^2 \operatorname{PolyLog}(2, -ie^{i(e+fx)})}{f^2} - \frac{3iad(c+dx)^2 \operatorname{PolyLog}(4, -ie^{i(e+fx)})}{f^2}$$

[Out] $\frac{1}{4}a*(d*x+c)^4/d - 2*I*a*(d*x+c)^3*\arctan(\exp(I*(f*x+e)))/f + 3*I*a*d*(d*x+c)^2*\text{polylog}(2, -I*\exp(I*(f*x+e)))/f^2 - 3*I*a*d*(d*x+c)^2*\text{polylog}(2, I*\exp(I*(f*x+e)))/f^2 - 6*a*d^2*(d*x+c)*\text{polylog}(3, -I*\exp(I*(f*x+e)))/f^3 + 6*a*d^2*(d*x+c)*\text{polylog}(3, I*\exp(I*(f*x+e)))/f^3 - 6*a*d^2*(d*x+c)*\text{polylog}(4, -I*\exp(I*(f*x+e)))/f^4 + 6*a*d^2*(d*x+c)*\text{polylog}(4, I*\exp(I*(f*x+e)))/f^4$

Rubi [A]

time = 0.15, antiderivative size = 227, normalized size of antiderivative = 1.00, number of steps used = 11, number of rules used = 6, integrand size = 18, $\frac{\text{number of rules}}{\text{integrand size}} = 0.333$, Rules used = {4275, 4266, 2611, 6744, 2320, 6724}

$$-\frac{2ia(c+dx)^3 \operatorname{ArcTan}(e^{i(e+fx)})}{f} - \frac{6ad^2(c+dx) \operatorname{Li}_3(-ie^{i(e+fx)})}{f^3} + \frac{6ad^2(c+dx) \operatorname{Li}_3(i e^{i(e+fx)})}{f^3} + \frac{3iad(c+dx)^2 \operatorname{Li}_2(-ie^{i(e+fx)})}{f^2} - \frac{3iad(c+dx)^2 \operatorname{Li}_2(i e^{i(e+fx)})}{f^2} + \frac{a(c+dx)^4}{4d} - \frac{6iad^3 \operatorname{Li}_4(-ie^{i(e+fx)})}{f^4} + \frac{6iad^3 \operatorname{Li}_4(i e^{i(e+fx)})}{f^4}$$

Antiderivative was successfully verified.

[In] $\operatorname{Int}[(c + d*x)^3 * (a + a*\operatorname{Sec}[e + f*x]), x]$

[Out] $(a*(c + d*x)^4)/(4*d) - ((2*I)*a*(c + d*x)^3*\operatorname{ArcTan}[E^(\operatorname{I}(e + f*x))])/f + ((3*I)*a*d*(c + d*x)^2*\operatorname{PolyLog}[2, (-I)*E^(\operatorname{I}(e + f*x))])/f^2 - ((3*I)*a*d*(c + d*x)^2*\operatorname{PolyLog}[2, I*E^(\operatorname{I}(e + f*x))])/f^2 - (6*a*d^2*(c + d*x)*\operatorname{PolyLog}[3, (-I)*E^(\operatorname{I}(e + f*x))])/f^3 + (6*a*d^2*(c + d*x)*\operatorname{PolyLog}[3, I*E^(\operatorname{I}(e + f*x))])/f^3 - ((6*I)*a*d^3*\operatorname{PolyLog}[4, (-I)*E^(\operatorname{I}(e + f*x))])/f^4 + ((6*I)*a*d^3*\operatorname{PolyLog}[4, I*E^(\operatorname{I}(e + f*x))])/f^4$

Rule 2320

```
Int[u_, x_Symbol] := With[{v = FunctionOfExponential[u, x]}, Dist[v/D[v, x], Subst[Int[FunctionOfExponentialFunction[u, x]/x, x], x, v], x] /; FunctionOfExponentialQ[u, x] && !MatchQ[u, (w_)*((a_.)*(v_)^(n_.))^(m_.) /; FreeQ[{a, m, n}, x] && IntegerQ[m*n]] && !MatchQ[u, E^((c_.)*((a_.) + (b_.)*x))* (F_)[v_] /; FreeQ[{a, b, c}, x] && InverseFunctionQ[F[x]]]]
```

Rule 2611

```
Int[Log[1 + (e_)*(F_)*((c_)*(a_) + (b_)*(x_)))^(n_.)]*((f_.) + (g_.)*(x_.))^(m_.), x_Symbol] := Simp[((-f + g*x)^m)*(\operatorname{PolyLog}[2, (-e)*(F^(\operatorname{c}(a + b*x)))^n]/(b*c*n*\operatorname{Log}[F])), x] + Dist[g*(m/(b*c*n*\operatorname{Log}[F])), Int[((f + g*x)^(m - 1)*\operatorname{PolyLog}[2, (-e)*(F^(\operatorname{c}(a + b*x)))^n], x), x] /; FreeQ[{F, a, b, c, e, f, g, n}, x] && GtQ[m, 0]]
```

Rule 4266

```
Int[csc[(e_.) + Pi*(k_.) + (f_.)*(x_)]*((c_.) + (d_.)*(x_))^(m_.), x_Symbol]
  :> Simp[-2*(c + d*x)^m*(ArcTanh[E^(I*k*Pi)*E^(I*(e + f*x))]/f), x] + (-Dist[d*(m/f), Int[(c + d*x)^(m - 1)*Log[1 - E^(I*k*Pi)*E^(I*(e + f*x))], x], x] + Dist[d*(m/f), Int[(c + d*x)^(m - 1)*Log[1 + E^(I*k*Pi)*E^(I*(e + f*x))], x], x]) /; FreeQ[{c, d, e, f}, x] && IntegerQ[2*k] && IGtQ[m, 0]
```

Rule 4275

```
Int[(csc[(e_.) + (f_.*(x_)]*(b_.) + (a_))^(n_.)*((c_.) + (d_.*(x_))^(m_.),
  x_Symbol] :> Int[ExpandIntegrand[(c + d*x)^m, (a + b*Csc[e + f*x])^n, x], x] /; FreeQ[{a, b, c, d, e, f, m}, x] && IGtQ[m, 0] && IGtQ[n, 0]
```

Rule 6724

```
Int[PolyLog[n_, (c_.*((a_.) + (b_.*(x_))^(p_.))]/((d_.) + (e_.*(x_)), x_Symbol] :> Simp[PolyLog[n + 1, c*(a + b*x)^p]/(e*p), x] /; FreeQ[{a, b, c, d, e, n, p}, x] && EqQ[b*d, a*e]
```

Rule 6744

```
Int[((e_.) + (f_.*(x_))^(m_.)*PolyLog[n_, (d_.*((F_)^(c_.*((a_.) + (b_.*(x_))))^(p_.))], x_Symbol] :> Simp[(e + f*x)^m*(PolyLog[n + 1, d*(F^(c*(a + b*x)))^p]/(b*c*p*Log[F])), x] - Dist[f*(m/(b*c*p*Log[F])), Int[(e + f*x)^(m - 1)*PolyLog[n + 1, d*(F^(c*(a + b*x)))^p], x], x] /; FreeQ[{F, a, b, c, d, e, f, n, p}, x] && GtQ[m, 0]
```

Rubi steps

$$\begin{aligned}
\int (c + dx)^3 (a + a \sec(e + fx)) dx &= \int (a(c + dx)^3 + a(c + dx)^3 \sec(e + fx)) dx \\
&= \frac{a(c + dx)^4}{4d} + a \int (c + dx)^3 \sec(e + fx) dx \\
&= \frac{a(c + dx)^4}{4d} - \frac{2ia(c + dx)^3 \tan^{-1}(e^{i(e+fx)})}{f} - \frac{(3ad) \int (c + dx)^2 \log(1 - e^{2ix}) dx}{f} \\
&= \frac{a(c + dx)^4}{4d} - \frac{2ia(c + dx)^3 \tan^{-1}(e^{i(e+fx)})}{f} + \frac{3iad(c + dx)^2 \text{Li}_2(-ie^{i(e+fx)})}{f^2} \\
&= \frac{a(c + dx)^4}{4d} - \frac{2ia(c + dx)^3 \tan^{-1}(e^{i(e+fx)})}{f} + \frac{3iad(c + dx)^2 \text{Li}_2(-ie^{i(e+fx)})}{f^2} \\
&= \frac{a(c + dx)^4}{4d} - \frac{2ia(c + dx)^3 \tan^{-1}(e^{i(e+fx)})}{f} + \frac{3iad(c + dx)^2 \text{Li}_2(-ie^{i(e+fx)})}{f^2} \\
&= \frac{a(c + dx)^4}{4d} - \frac{2ia(c + dx)^3 \tan^{-1}(e^{i(e+fx)})}{f} + \frac{3iad(c + dx)^2 \text{Li}_2(-ie^{i(e+fx)})}{f^2}
\end{aligned}$$

Mathematica [A]

time = 0.13, size = 218, normalized size = 0.96

$$a \left(\frac{(c + dx)^4}{4d} - \frac{2i(c + dx)^3 \text{ArcTan}(e^{i(e+fx)})}{f} + \frac{3id(f^2(c + dx)^2 \text{PolyLog}(2, -ie^{i(e+fx)}) + 2idf(c + dx) \text{PolyLog}(3, -ie^{i(e+fx)}) - 2d^2 \text{PolyLog}(4, -ie^{i(e+fx)}))}{f^4} + \frac{3d(-if^2(c + dx)^2 \text{PolyLog}(2, ie^{i(e+fx)}) + 2d(f(c + dx) \text{PolyLog}(3, ie^{i(e+fx)}) + id \text{PolyLog}(4, ie^{i(e+fx)})))}{f^4} \right)$$

Antiderivative was successfully verified.

[In] `Integrate[(c + d*x)^3*(a + a*Sec[e + f*x]), x]`

[Out] $a*((c + d*x)^4/(4*d) - ((2*I)*(c + d*x)^3 \text{ArcTan}[E^{\wedge}(I*(e + f*x))])/f + ((3*I)*d*(f^2*(c + d*x)^2 \text{PolyLog}[2, (-I)*E^{\wedge}(I*(e + f*x))]) + (2*I)*d*f*(c + d*x)*\text{PolyLog}[3, (-I)*E^{\wedge}(I*(e + f*x))]) - 2*d^2 \text{PolyLog}[4, (-I)*E^{\wedge}(I*(e + f*x))])/f^4 + (3*d*((-I)*f^2*(c + d*x)^2 \text{PolyLog}[2, I*E^{\wedge}(I*(e + f*x))]) + 2*d*(f*(c + d*x) \text{PolyLog}[3, I*E^{\wedge}(I*(e + f*x))]) + I*d \text{PolyLog}[4, I*E^{\wedge}(I*(e + f*x))]))/f^4)$

Maple [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 755 vs. $2(200) = 400$.

time = 0.74, size = 756, normalized size = 3.33

method	result
risch	$-\frac{6iac d^2 e^2 \arctan(e^{i(fx+e)})}{f^3} + \frac{6ia c^2 de \arctan(e^{i(fx+e)})}{f^2} + \frac{6ia d^2 c \text{polylog}(2, -ie^{i(fx+e)})x}{f^2} - \frac{6ia d^2 c \text{polylog}(2, ie^{i(fx+e)})x}{f^2}$

Verification of antiderivative is not currently implemented for this CAS.

[In] `int((d*x+c)^3*(a+a*sec(f*x+e)), x, method=_RETURNVERBOSE)`

```
[Out] 6*I*a/f^2*d^2*c*polylog(2,-I*exp(I*(f*x+e)))*x-6*I*a/f^3*c*d^2*e^2*arctan(e
xp(I*(f*x+e)))+6*I*a/f^2*c^2*d*e*arctan(exp(I*(f*x+e)))-6*I*a/f^2*d^2*c*poly
ylog(2,I*exp(I*(f*x+e)))*x+6*I*a*d^3*polylog(4,I*exp(I*(f*x+e)))/f^4+a*d^2*
c*x^3+3/2*a*d*c^2*x^2+a*c^3*x-6*I*a*d^3*polylog(4,-I*exp(I*(f*x+e)))/f^4+3*
a/f*c^2*d*ln(1-I*exp(I*(f*x+e)))*x+3*a/f^2*c^2*d*ln(1-I*exp(I*(f*x+e)))*e-3
*a/f*c^2*d*ln(1+I*exp(I*(f*x+e)))*x-3*a/f^2*c^2*d*ln(1+I*exp(I*(f*x+e)))*e+
3*a/f*d^2*c*ln(1-I*exp(I*(f*x+e)))*x^2-3*a/f*d^2*c*ln(1+I*exp(I*(f*x+e)))*x
^2-3*a/f^3*c*d^2*ln(1-I*exp(I*(f*x+e)))+3*a/f^3*c*d^2*ln(1+I*exp(I*(f*x+e)))
+3*I*a/f^2*c^2*d*polylog(2,-I*exp(I*(f*x+e)))-3*I*a/f^2*d^3*polylog(2,I*exp(I*(f*x+e)))*x^2+3*I*a/f^2*d^3*polylog(2,-I*exp(I*(f*x+e)))*x^2+2*I*a/f^4*d^3*e^3*arctan(exp(I*(f*x+e)))-3*I*a/f^2*c^2*d*polylog(2,I*exp(I*(f*x+e)))-2*I*a/f*c^3*arctan(exp(I*(f*x+e)))+1/4*a*d^3*x^4+1/4*a/d*c^4-6*a/f^
3*d^3*polylog(3,-I*exp(I*(f*x+e)))*x-a/f^4*e^3*d^3*ln(1+I*exp(I*(f*x+e)))+a
/f^4*e^3*d^3*ln(1-I*exp(I*(f*x+e)))+6*a/f^3*d^3*polylog(3,I*exp(I*(f*x+e)))
*x-6*a/f^3*d^2*c*polylog(3,-I*exp(I*(f*x+e)))+6*a/f^3*d^2*c*polylog(3,I*exp(I*(f*x+e)))+a/f*d^3*ln(1-I*exp(I*(f*x+e)))*x^3-a/f*d^3*ln(1+I*exp(I*(f*x+e)))
)*x^3
```

Maxima [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 995 vs. 2(194) = 388.

time = 0.66, size = 995, normalized size = 4.38

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)^3*(a+a*sec(f*x+e)),x, algorithm="maxima")
[Out] 1/4*(4*(f*x + e)*a*c^3 + (f*x + e)^4*a*d^3/f^3 + 4*(f*x + e)^3*a*c*d^2/f^2
+ 6*(f*x + e)^2*a*c^2*d/f - 4*(f*x + e)^3*a*d^3*e/f^3 - 12*(f*x + e)^2*a*c*
d^2*e/f^2 - 12*(f*x + e)*a*c^2*d*e/f + 4*a*c^3*log(sec(f*x + e)) + tan(f*x +
e)) - 12*a*c^2*d*e*log(sec(f*x + e)) + tan(f*x + e))/f + 6*(f*x + e)^2*a*d^
3*e^2/f^3 + 12*(f*x + e)*a*c*d^2*e^2/f^2 + 12*a*c*d^2*e^2*log(sec(f*x + e)
+ tan(f*x + e))/f^2 - 4*(f*x + e)*a*d^3*e^3/f^3 - 4*a*d^3*e^3*log(sec(f*x +
e)) + tan(f*x + e))/f^3 + 2*(12*I*a*d^3*polylog(4, I*e^(I*f*x + I*e)) - 12*
I*a*d^3*polylog(4, -I*e^(I*f*x + I*e)) - 2*(I*(f*x + e)^3*a*d^3 + 3*(I*a*c*
d^2*f - I*a*d^3*e)*(f*x + e)^2 + 3*(I*a*c^2*d*f^2 - 2*I*a*c*d^2*f*e + I*a*d
^3*e^2)*(f*x + e))*arctan2(cos(f*x + e), sin(f*x + e) + 1) - 2*(I*(f*x + e)
^3*a*d^3 + 3*(I*a*c*d^2*f - I*a*d^3*e)*(f*x + e)^2 + 3*(I*a*c^2*d*f^2 - 2*I
*a*c*d^2*f*e + I*a*d^3*e^2)*(f*x + e))*arctan2(cos(f*x + e), -sin(f*x + e)
+ 1) - 6*(I*(f*x + e)^2*a*d^3 + I*a*c^2*d*f^2 - 2*I*a*c*d^2*f*e + I*a*d^3*e
^2 + 2*(I*a*c*d^2*f - I*a*d^3*e)*(f*x + e))*dilog(I*e^(I*f*x + I*e)) - 6*(-
I*(f*x + e)^2*a*d^3 - I*a*c^2*d*f^2 + 2*I*a*c*d^2*f*e - I*a*d^3*e^2 + 2*(-I
*a*c*d^2*f + I*a*d^3*e)*(f*x + e))*dilog(-I*e^(I*f*x + I*e)) + ((f*x + e)^3
*a*d^3 + 3*(a*c*d^2*f - a*d^3*e)*(f*x + e)^2 + 3*(a*c^2*d*f^2 - 2*a*c*d^2*f
*e + a*d^3*e^2)*(f*x + e))*log(cos(f*x + e)^2 + sin(f*x + e)^2 + 2*sin(f*x
```

$$+ e) + 1) - ((f*x + e)^3*a*d^3 + 3*(a*c*d^2*f - a*d^3*e)*(f*x + e)^2 + 3*(a*c^2*d*f^2 - 2*a*c*d^2*f*e + a*d^3*e^2)*(f*x + e))*\log(\cos(f*x + e)^2 + \sin(f*x + e)^2 - 2*\sin(f*x + e) + 1) + 12*((f*x + e)*a*d^3 + a*c*d^2*f - a*d^3*e)*\text{polylog}(3, I*e^(I*f*x + I*e)) - 12*((f*x + e)*a*d^3 + a*c*d^2*f - a*d^3*e)*\text{polylog}(3, -I*e^(I*f*x + I*e)))/f^3/f$$

Fricas [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 1117 vs. 2(194) = 388.

time = 3.04, size = 1117, normalized size = 4.92

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)^3*(a+a*sec(f*x+e)),x, algorithm="fricas")
[Out] 1/4*(a*d^3*f^4*x^4 + 4*a*c*d^2*f^4*x^3 + 6*a*c^2*d*f^4*x^2 + 4*a*c^3*f^4*x
+ 12*I*a*d^3*polylog(4, I*cos(f*x + e) + sin(f*x + e)) + 12*I*a*d^3*polylog(4, I*cos(f*x + e) - sin(f*x + e)) - 12*I*a*d^3*polylog(4, -I*cos(f*x + e) + sin(f*x + e)) - 12*I*a*d^3*polylog(4, -I*cos(f*x + e) - sin(f*x + e)) - 6*(I*a*d^3*f^2*x^2 + 2*I*a*c*d^2*f^2*x + I*a*c^2*d*f^2)*dilog(I*cos(f*x + e) + sin(f*x + e)) - 6*(I*a*d^3*f^2*x^2 + 2*I*a*c*d^2*f^2*x + I*a*c^2*d*f^2)*dilog(I*cos(f*x + e) - sin(f*x + e)) - 6*(-I*a*d^3*f^2*x^2 - 2*I*a*c*d^2*f^2*x - I*a*c^2*d*f^2)*dilog(-I*cos(f*x + e) + sin(f*x + e)) - 6*(-I*a*d^3*f^2*x^2 - 2*I*a*c*d^2*f^2*x - I*a*c^2*d*f^2)*dilog(-I*cos(f*x + e) - sin(f*x + e)) + 2*(a*c^3*f^3 - 3*a*c^2*d*f^2*e + 3*a*c*d^2*f*e^2 - a*d^3*e^3)*log(cos(f*x + e) + I*sin(f*x + e) + I) - 2*(a*c^3*f^3 - 3*a*c^2*d*f^2*e + 3*a*c*d^2*f*e^2 - a*d^3*e^3)*log(cos(f*x + e) - I*sin(f*x + e) + I) + 2*(a*d^3*f^3*x^3 + 3*a*c*d^2*f^3*x^2 + 3*a*c^2*d*f^3*x + 3*a*c^2*d*f^2*e - 3*a*c*d^2*f^2*e^2 + a*d^3*3*e^3)*log(I*cos(f*x + e) + sin(f*x + e) + 1) - 2*(a*d^3*f^3*x^3 + 3*a*c*d^2*f^3*x^2 + 3*a*c^2*d*f^3*x + 3*a*c^2*d*f^2*e - 3*a*c*d^2*f*e^2 + a*d^3*3*e^3)*log(I*cos(f*x + e) - sin(f*x + e) + 1) + 2*(a*d^3*f^3*x^3 + 3*a*c*d^2*f^3*x^2 + 3*a*c^2*d*f^3*x + 3*a*c^2*d*f^2*e - 3*a*c*d^2*f*e^2 + a*d^3*3*e^3)*log(-I*cos(f*x + e) - sin(f*x + e) + 1) + 2*(a*c^3*f^3 - 3*a*c^2*d*f^2*e + a*d^3*3*e^3)*log(-cos(f*x + e) + I*sin(f*x + e) + I) - 2*(a*c^3*f^3 - 3*a*c^2*d*f^2*e + 3*a*c*d^2*f*e^2 - a*d^3*e^3)*log(-cos(f*x + e) - I*sin(f*x + e) + I) - 12*(a*d^3*f*x + a*c*d^2*f)*polylog(3, I*cos(f*x + e) + sin(f*x + e)) + 12*(a*d^3*f*x + a*c*d^2*f)*polylog(3, I*cos(f*x + e) - sin(f*x + e)) - 12*(a*d^3*f*x + a*c*d^2*f)*polylog(3, -I*cos(f*x + e) + sin(f*x + e)) + 12*(a*d^3*f*x + a*c*d^2*f)*polylog(3, -I*cos(f*x + e) - sin(f*x + e)))/f^4
```

Sympy [F]

time = 0.00, size = 0, normalized size = 0.00

$$a \left(\int c^3 dx + \int c^3 \sec(e + fx) dx + \int d^3 x^3 dx + \int 3cd^2 x^2 dx + \int 3c^2 dx dx + \int d^3 x^3 \sec(e + fx) dx + \int 3cd^2 x^2 \sec(e + fx) dx + \int 3c^2 dx \sec(e + fx) dx \right)$$

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)**3*(a+a*sec(f*x+e)),x)
[Out] a*(Integral(c**3, x) + Integral(c**3*sec(e + f*x), x) + Integral(d**3*x**3,
x) + Integral(3*c*d**2*x**2, x) + Integral(3*c**2*d*x, x) + Integral(d**3*x**3*sec(e + f*x), x) + Integral(3*c*d**2*x**2*sec(e + f*x), x) + Integral(3*c**2*d*x*sec(e + f*x), x))
```

Giac [F]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)^3*(a+a*sec(f*x+e)),x, algorithm="giac")
[Out] integrate((d*x + c)^3*(a*sec(f*x + e) + a), x)
```

Mupad [F]

time = 0.00, size = -1, normalized size = -0.00

$$\int \left(a + \frac{a}{\cos(e + fx)} \right) (c + dx)^3 dx$$

Verification of antiderivative is not currently implemented for this CAS.

```
[In] int((a + a/cos(e + f*x))*(c + d*x)^3,x)
[Out] int((a + a/cos(e + f*x))*(c + d*x)^3, x)
```

$$3.2 \quad \int (c + dx)^2 (a + a \sec(e + fx)) dx$$

Optimal. Leaf size=157

$$\frac{a(c+dx)^3}{3d} - \frac{2ia(c+dx)^2 \operatorname{ArcTan}(e^{i(e+fx)})}{f} + \frac{2iad(c+dx) \operatorname{PolyLog}(2, -ie^{i(e+fx)})}{f^2} - \frac{2iad(c+dx) \operatorname{PolyLog}(2, ie^{i(e+fx)})}{f^2}$$

[Out] $\frac{1}{3}a*(d*x+c)^3/d - 2*I*a*(d*x+c)^2*\arctan(\exp(I*(f*x+e)))/f + 2*I*a*d*(d*x+c)*\text{polylog}(2, -I*\exp(I*(f*x+e)))/f^2 - 2*I*a*d*(d*x+c)*\text{polylog}(2, I*\exp(I*(f*x+e)))/f^2 - 2*a*d^2*\text{polylog}(3, -I*\exp(I*(f*x+e)))/f^3 + 2*a*d^2*\text{polylog}(3, I*\exp(I*(f*x+e)))/f^3$

Rubi [A]

time = 0.11, antiderivative size = 157, normalized size of antiderivative = 1.00, number of steps used = 9, number of rules used = 5, integrand size = 18, $\frac{\text{number of rules}}{\text{integrand size}} = 0.278$, Rules used = {4275, 4266, 2611, 2320, 6724}

$$\frac{2ia(c+dx)^2 \operatorname{ArcTan}(e^{i(e+fx)})}{f} + \frac{2iad(c+dx) \operatorname{Li}_2(-ie^{i(e+fx)})}{f^2} - \frac{2iad(c+dx) \operatorname{Li}_2(ie^{i(e+fx)})}{f^2} + \frac{a(c+dx)^3}{3d} - \frac{2ad^2 \operatorname{Li}_3(-ie^{i(e+fx)})}{f^3} + \frac{2ad^2 \operatorname{Li}_3(ie^{i(e+fx)})}{f^3}$$

Antiderivative was successfully verified.

[In] $\operatorname{Int}[(c + d*x)^2 * (a + a*\operatorname{Sec}[e + f*x]), x]$

[Out] $(a*(c + d*x)^3)/(3*d) - ((2*I)*a*(c + d*x)^2*\operatorname{ArcTan}[E^{\wedge}(I*(e + f*x))])/f + ((2*I)*a*d*(c + d*x)*\operatorname{PolyLog}[2, (-I)*E^{\wedge}(I*(e + f*x))])/f^2 - ((2*I)*a*d*(c + d*x)*\operatorname{PolyLog}[2, I*E^{\wedge}(I*(e + f*x))])/f^2 - (2*a*d^2*\operatorname{PolyLog}[3, (-I)*E^{\wedge}(I*(e + f*x))])/f^3 + (2*a*d^2*\operatorname{PolyLog}[3, I*E^{\wedge}(I*(e + f*x))])/f^3$

Rule 2320

```
Int[u_, x_Symbol] :> With[{v = FunctionOfExponential[u, x]}, Dist[v/D[v, x], Subst[Int[FunctionOfExponentialFunction[u, x]/x, x], x, v], x]] /; FunctionOfExponentialQ[u, x] && !MatchQ[u, (w_)*((a_.)*(v_)^(n_))^(m_)] /; FreeQ[{a, m, n}, x] && IntegerQ[m*n] && !MatchQ[u, E^((c_.)*((a_.) + (b_.)*x))* (F_)[v_]] /; FreeQ[{a, b, c}, x] && InverseFunctionQ[F[x]]]
```

Rule 2611

```
Int[Log[1 + (e_.)*((F_.)^((c_.)*((a_.) + (b_.)*(x_))))^(n_.)]*((f_.) + (g_.)*(x_.))^m_, x_Symbol] :> Simp[((-f + g*x)^m)*(\operatorname{PolyLog}[2, (-e)*(F^c*(a + b*x))^n]/(b*c*n*\operatorname{Log}[F])), x] + Dist[g*(m/(b*c*n*\operatorname{Log}[F])), Int[((f + g*x)^(m - 1)*\operatorname{PolyLog}[2, (-e)*(F^c*(a + b*x))^n], x), x] /; FreeQ[{F, a, b, c, e, f, g, n}, x] && GtQ[m, 0]
```

Rule 4266

```
Int[csc[(e_.) + Pi*(k_.) + (f_.)*(x_.)]*((c_.) + (d_.)*(x_.))^(m_.), x_Symbol] :> Simp[-2*(c + d*x)^m*(\operatorname{ArcTanh}[E^{\wedge}(I*k*Pi)*E^{\wedge}(I*(e + f*x))])/f, x] + (-Di
```

```
st[d*(m/f), Int[(c + d*x)^(m - 1)*Log[1 - E^(I*k*Pi)*E^(I*(e + f*x))], x],
x] + Dist[d*(m/f), Int[(c + d*x)^(m - 1)*Log[1 + E^(I*k*Pi)*E^(I*(e + f*x))],
x], x]) /; FreeQ[{c, d, e, f}, x] && IntegerQ[2*k] && IGtQ[m, 0]
```

Rule 4275

```
Int[(csc[(e_.) + (f_ .)*(x_ )]*(b_ .) + (a_ .)^n_ .)*(c_ .) + (d_ .)*(x_ .))^m_ .,
x_Symbol] :> Int[ExpandIntegrand[(c + d*x)^m, (a + b*Csc[e + f*x])^n, x],
x] /; FreeQ[{a, b, c, d, e, f, m}, x] && IGtQ[m, 0] && IGtQ[n, 0]
```

Rule 6724

```
Int[PolyLog[n_, (c_ .)*(a_ .) + (b_ .)*(x_ .)]/((d_ .) + (e_ .)*(x_ .)), x_Symbol] :> Simp[PolyLog[n + 1, c*(a + b*x)^p]/(e*p), x] /; FreeQ[{a, b, c, d, e, n, p}, x] && EqQ[b*d, a*e]
```

Rubi steps

$$\begin{aligned}
\int (c + dx)^2(a + a \sec(e + fx)) \, dx &= \int (a(c + dx)^2 + a(c + dx)^2 \sec(e + fx)) \, dx \\
&= \frac{a(c + dx)^3}{3d} + a \int (c + dx)^2 \sec(e + fx) \, dx \\
&= \frac{a(c + dx)^3}{3d} - \frac{2ia(c + dx)^2 \tan^{-1}(e^{i(e+fx)})}{f} - \frac{(2ad) \int (c + dx) \log(1 - ie^{i(e+fx)})}{f} \\
&= \frac{a(c + dx)^3}{3d} - \frac{2ia(c + dx)^2 \tan^{-1}(e^{i(e+fx)})}{f} + \frac{2iad(c + dx)\text{Li}_2(-ie^{i(e+fx)})}{f^2} \\
&= \frac{a(c + dx)^3}{3d} - \frac{2ia(c + dx)^2 \tan^{-1}(e^{i(e+fx)})}{f} + \frac{2iad(c + dx)\text{Li}_2(-ie^{i(e+fx)})}{f^2} \\
&= \frac{a(c + dx)^3}{3d} - \frac{2ia(c + dx)^2 \tan^{-1}(e^{i(e+fx)})}{f} + \frac{2iad(c + dx)\text{Li}_2(-ie^{i(e+fx)})}{f^2}
\end{aligned}$$

Mathematica [A]

time = 0.16, size = 151, normalized size = 0.96

$$a \left(\frac{(c + dx)^3}{3d} - \frac{2i(c + dx)^2 \text{ArcTan}(e^{i(e+fx)})}{f} + \frac{2id(f(c + dx)\text{PolyLog}(2, -ie^{i(e+fx)}) + id\text{PolyLog}(3, -ie^{i(e+fx)}))}{f^3} + \frac{2d(-if(c + dx)\text{PolyLog}(2, ie^{i(e+fx)}) + d\text{PolyLog}(3, ie^{i(e+fx)}))}{f^3} \right)$$

Antiderivative was successfully verified.

```
[In] Integrate[(c + d*x)^2*(a + a*Sec[e + f*x]), x]
[Out] a*((c + d*x)^3/(3*d) - ((2*I)*(c + d*x)^2*ArcTan[E^(I*(e + f*x))])/f + ((2*I)*d*(f*(c + d*x)*PolyLog[2, (-I)*E^(I*(e + f*x))]) + I*d*PolyLog[3, (-I)*E^
```

$$(I*(e + f*x)))]/f^3 + (2*d*((-I)*f*(c + d*x)*PolyLog[2, I*E^(I*(e + f*x))]) + d*PolyLog[3, I*E^(I*(e + f*x))]))/f^3)$$

Maple [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 439 vs. 2(138) = 276.

time = 0.64, size = 440, normalized size = 2.80

method	result
risch	$\frac{ad^2x^3}{3} + adc x^2 + ac^2x + \frac{ac^3}{3d} + \frac{4iacde \arctan(e^{i(fx+e)})}{f^2} + \frac{2acd \ln(1-ie^{i(fx+e)})e}{f^2} - \frac{ad^2 \ln(1+ie^{i(fx+e)})x^2}{f} - \frac{2iacde \ln(1-ie^{i(fx+e)})}{f}$

Verification of antiderivative is not currently implemented for this CAS.

[In] `int((d*x+c)^2*(a+a*sec(f*x+e)),x,method=_RETURNVERBOSE)`

[Out] $1/3*a*d^2*x^3+a*d*c*x^2+a*c^2*x+1/3*a/d*c^3+2*I*a/f^2*c*d*polylog(2,-I*\exp(I*(f*x+e)))+2*a/f^2*c*d*\ln(1-I*\exp(I*(f*x+e)))*e-a/f*d^2*\ln(1+I*\exp(I*(f*x+e)))*x^2+4*I*a/f^2*c*d*e*\arctan(\exp(I*(f*x+e)))-2*a*d^2*polylog(3,-I*\exp(I*(f*x+e)))/f^3+2*a*d^2*polylog(3,I*\exp(I*(f*x+e)))/f^3-2*a/f*c*d*\ln(1+I*\exp(I*(f*x+e)))*x+a/f*d^2*\ln(1-I*\exp(I*(f*x+e)))*x^2+2*a/f*c*d*\ln(1-I*\exp(I*(f*x+e)))*x+2*I*a/f^2*d^2*polylog(2,-I*\exp(I*(f*x+e)))*x-2*I*a/f^2*c*d*polylog(2,I*\exp(I*(f*x+e)))-a/f^3*e^2*d^2*\ln(1-I*\exp(I*(f*x+e)))-2*I*a/f^3*d^2*e^2*\arctan(\exp(I*(f*x+e)))-2*I*a/f*c^2*\arctan(\exp(I*(f*x+e)))-2*a/f^2*c*d*\ln(1+I*\exp(I*(f*x+e)))*e-2*I*a/f^2*d^2*polylog(2,I*\exp(I*(f*x+e)))*x+a/f^3*e^2*d^2*\ln(1+I*\exp(I*(f*x+e)))$

Maxima [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 559 vs. 2(134) = 268.

time = 0.64, size = 559, normalized size = 3.56

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate((d*x+c)^2*(a+a*sec(f*x+e)),x, algorithm="maxima")`

[Out] $1/6*(6*(f*x + e)*a*c^2 + 2*(f*x + e)^3*a*d^2/f^2 + 6*(f*x + e)^2*a*c*d/f - 6*(f*x + e)^2*a*d^2*e/f^2 - 12*(f*x + e)*a*c*d*e/f + 6*a*c^2*log(sec(f*x + e) + \tan(f*x + e)) - 12*a*c*d*e*log(sec(f*x + e) + \tan(f*x + e))/f + 6*(f*x + e)*a*d^2*e^2/f^2 + 6*a*d^2*e^2*log(sec(f*x + e) + \tan(f*x + e))/f^2 + 3*(4*a*d^2*polylog(3, I*e^(I*f*x + I*e)) - 4*a*d^2*polylog(3, -I*e^(I*f*x + I*e)) - 2*(I*(f*x + e))^2*a*d^2 + 2*(I*a*c*d*f - I*a*d^2*e)*(f*x + e))*\arctan(2(\cos(f*x + e), \sin(f*x + e) + 1) - 2*(I*(f*x + e))^2*a*d^2 + 2*(I*a*c*d*f - I*a*d^2*e)*(f*x + e))*\arctan2(\cos(f*x + e), -\sin(f*x + e) + 1) - 4*(I*(f*x + e)*a*d^2 + I*a*c*d*f - I*a*d^2*e)*dilog(I*e^(I*f*x + I*e)) - 4*(-I*(f*x + e)*a*d^2 - I*a*c*d*f + I*a*d^2*e)*dilog(-I*e^(I*f*x + I*e)) + ((f*x + e)^2*a*d^2 + 2*(a*c*d*f - a*d^2*e)*(f*x + e))*\log(\cos(f*x + e)^2 + \sin(f*x + e)^2))$

$$)^2 + 2*\sin(f*x + e) + 1) - ((f*x + e)^2*a*d^2 + 2*(a*c*d*f - a*d^2*e)*(f*x + e))*\log(\cos(f*x + e)^2 + \sin(f*x + e)^2 - 2*\sin(f*x + e) + 1))/f^2)/f$$

Fricas [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 707 vs. 2(134) = 268.

time = 3.35, size = 707, normalized size = 4.50

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)^2*(a+a*sec(f*x+e)),x, algorithm="fricas")
[Out] 1/6*(2*a*d^2*f^3*x^3 + 6*a*c*d*f^3*x^2 + 6*a*c^2*f^3*x - 6*a*d^2*polylog(3,
I*cos(f*x + e) + sin(f*x + e)) + 6*a*d^2*polylog(3, I*cos(f*x + e) - sin(f*x + e)) - 6*a*d^2*polylog(3, -I*cos(f*x + e) + sin(f*x + e)) + 6*a*d^2*polylog(3, -I*cos(f*x + e) - sin(f*x + e)) - 6*(I*a*d^2*f*x + I*a*c*d*f)*dilog(I*cos(f*x + e) + sin(f*x + e)) - 6*(I*a*d^2*f*x + I*a*c*d*f)*dilog(I*cos(f*x + e) - sin(f*x + e)) - 6*(-I*a*d^2*f*x - I*a*c*d*f)*dilog(-I*cos(f*x + e) + sin(f*x + e)) - 6*(-I*a*d^2*f*x - I*a*c*d*f)*dilog(-I*cos(f*x + e) - sin(f*x + e)) + 3*(a*c^2*f^2 - 2*a*c*d*f*e + a*d^2*e^2)*log(cos(f*x + e) + I) - 3*(a*c^2*f^2 - 2*a*c*d*f*e + a*d^2*e^2)*log(cos(f*x + e) - I*sin(f*x + e) + I) + 3*(a*d^2*f^2*x^2 + 2*a*c*d*f^2*x + 2*a*c*d*f*e - a*d^2*e^2)*log(I*cos(f*x + e) + sin(f*x + e) + 1) - 3*(a*d^2*f^2*x^2 + 2*a*c*d*f^2*x + 2*a*c*d*f*e - a*d^2*e^2)*log(I*cos(f*x + e) - sin(f*x + e) + 1) + 3*(a*d^2*f^2*x^2 + 2*a*c*d*f^2*x + 2*a*c*d*f*e - a*d^2*e^2)*log(-I*cos(f*x + e) + sin(f*x + e) + 1) - 3*(a*d^2*f^2*x^2 + 2*a*c*d*f^2*x + 2*a*c*d*f*e - a*d^2*e^2)*log(-I*cos(f*x + e) - sin(f*x + e) + 1) + 3*(a*c^2*f^2 - 2*a*c*d*f*e + a*d^2*e^2)*log(-cos(f*x + e) + I*sin(f*x + e) + I) - 3*(a*c^2*f^2 - 2*a*c*d*f*e + a*d^2*e^2)*log(-cos(f*x + e) - I*sin(f*x + e) + I))/f^3
```

Sympy [F]

time = 0.00, size = 0, normalized size = 0.00

$$a \left(\int c^2 dx + \int c^2 \sec(e + fx) dx + \int d^2 x^2 dx + \int 2cdx dx + \int d^2 x^2 \sec(e + fx) dx + \int 2cdx \sec(e + fx) dx \right)$$

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)**2*(a+a*sec(f*x+e)),x)
```

```
[Out] a*(Integral(c**2, x) + Integral(c**2*sec(e + f*x), x) + Integral(d**2*x**2, x) + Integral(2*c*d*x, x) + Integral(d**2*x**2*sec(e + f*x), x) + Integral(2*c*d*x*sec(e + f*x), x))
```

Giac [F]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate((d*x+c)^2*(a+a*sec(f*x+e)),x, algorithm="giac")`

[Out] `integrate((d*x + c)^2*(a*sec(f*x + e) + a), x)`

Mupad [F]

time = 0.00, size = -1, normalized size = -0.01

$$\int \left(a + \frac{a}{\cos(e + f x)} \right) (c + d x)^2 dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] `int((a + a/cos(e + f*x))*(c + d*x)^2,x)`

[Out] `int((a + a/cos(e + f*x))*(c + d*x)^2, x)`

$$\int (c + dx)(a + a \sec(e + fx)) dx$$

Optimal. Leaf size=93

$$\frac{a(c + dx)^2}{2d} - \frac{2ia(c + dx)\text{ArcTan}(e^{i(e+fx)})}{f} + \frac{iad\text{PolyLog}(2, -ie^{i(e+fx)})}{f^2} - \frac{iad\text{PolyLog}(2, ie^{i(e+fx)})}{f^2}$$

[Out] $\frac{1}{2}a*(d*x+c)^2/d - 2*I*a*(d*x+c)*\text{arctan}(\exp(I*(f*x+e)))/f + I*a*d*\text{polylog}(2, -I*\exp(I*(f*x+e)))/f^2 - I*a*d*\text{polylog}(2, I*\exp(I*(f*x+e)))/f^2$

Rubi [A]

time = 0.05, antiderivative size = 93, normalized size of antiderivative = 1.00, number of steps used = 7, number of rules used = 4, integrand size = 16, $\frac{\text{number of rules}}{\text{integrand size}}$ = 0.250, Rules used = {4275, 4266, 2317, 2438}

$$-\frac{2ia(c + dx)\text{ArcTan}(e^{i(e+fx)})}{f} + \frac{a(c + dx)^2}{2d} + \frac{iad\text{Li}_2(-ie^{i(e+fx)})}{f^2} - \frac{iad\text{Li}_2(ie^{i(e+fx)})}{f^2}$$

Antiderivative was successfully verified.

[In] $\text{Int}[(c + d*x)*(a + a*\text{Sec}[e + f*x]), x]$

[Out] $(a*(c + d*x)^2)/(2*d) - ((2*I)*a*(c + d*x)*\text{ArcTan}[E^{i(e + f*x)}])/f + (I*a*d*\text{PolyLog}[2, (-I)*E^{i(e + f*x)}])/f^2 - (I*a*d*\text{PolyLog}[2, I*E^{i(e + f*x)}])/f^2$

Rule 2317

```
Int[Log[(a_) + (b_.)*((F_)^((e_.)*((c_.) + (d_.)*(x_))))^(n_.)], x_Symbol]
  :> Dist[1/(d*e*n*Log[F]), Subst[Int[Log[a + b*x]/x, x], x, (F^(e*(c + d*x)))^n], x] /; FreeQ[{F, a, b, c, d, e, n}, x] && GtQ[a, 0]
```

Rule 2438

```
Int[Log[((d_) + (e_.)*(x_))^(n_.)]/(x_), x_Symbol] :> Simp[-PolyLog[2, (-c)*e*x^n]/n, x] /; FreeQ[{c, d, e, n}, x] && EqQ[c*d, 1]
```

Rule 4266

```
Int[csc[(e_.) + Pi*(k_.) + (f_.)*(x_)]*((c_.) + (d_.)*(x_))^(m_.), x_Symbol]
  :> Simp[-2*(c + d*x)^m*(ArcTanh[E^(I*k*Pi)*E^(I*(e + f*x))]/f), x] + (-Dist[d*(m/f), Int[(c + d*x)^(m - 1)*Log[1 - E^(I*k*Pi)*E^(I*(e + f*x))], x], x] + Dist[d*(m/f), Int[(c + d*x)^(m - 1)*Log[1 + E^(I*k*Pi)*E^(I*(e + f*x))], x], x]) /; FreeQ[{c, d, e, f}, x] && IntegerQ[2*k] && IGtQ[m, 0]
```

Rule 4275

```
Int[(csc[(e_.) + (f_.)*(x_)]*(b_.)^(n_.)*(c_.) + (d_.)*(x_))^(m_.)
, x_Symbol] :> Int[ExpandIntegrand[(c + d*x)^m, (a + b*Csc[e + f*x])^n, x],
x] /; FreeQ[{a, b, c, d, e, f, m}, x] && IGtQ[m, 0] && IGtQ[n, 0]
```

Rubi steps

$$\begin{aligned}
\int (c + dx)(a + a \sec(e + fx)) dx &= \int (a(c + dx) + a(c + dx) \sec(e + fx)) dx \\
&= \frac{a(c + dx)^2}{2d} + a \int (c + dx) \sec(e + fx) dx \\
&= \frac{a(c + dx)^2}{2d} - \frac{2ia(c + dx) \tan^{-1}(e^{i(e+fx)})}{f} - \frac{(ad) \int \log(1 - ie^{i(e+fx)}) dx}{f} \\
&= \frac{a(c + dx)^2}{2d} - \frac{2ia(c + dx) \tan^{-1}(e^{i(e+fx)})}{f} + \frac{(iad) \text{Subst}\left(\int \frac{\log(1-ix)}{x} dx, x, f\right)}{f^2} \\
&= \frac{a(c + dx)^2}{2d} - \frac{2ia(c + dx) \tan^{-1}(e^{i(e+fx)})}{f} + \frac{iad \text{Li}_2(-ie^{i(e+fx)})}{f^2} - \frac{iad \text{Li}_2(ie^{i(e+fx)})}{f^2}
\end{aligned}$$

Mathematica [A]

time = 0.06, size = 87, normalized size = 0.94

$$\frac{a(f(fx(2c + dx) - 4i(c + dx)\text{ArcTan}(e^{i(e+fx)})) + 2id\text{PolyLog}(2, -ie^{i(e+fx)}) - 2id\text{PolyLog}(2, ie^{i(e+fx)}))}{2f^2}$$

Antiderivative was successfully verified.

[In] `Integrate[(c + d*x)*(a + a*Sec[e + f*x]), x]`

[Out] $\frac{a(f(fx(2c + dx) - 4i(c + dx)\text{ArcTan}[E^{\wedge}(I*(e + f*x))]) + (2*I)*d*\text{PolyLog}[2, (-I)*E^{\wedge}(I*(e + f*x))] - (2*I)*d*\text{PolyLog}[2, I*E^{\wedge}(I*(e + f*x))])}{(2*f^2)}$

Maple [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 165 vs. $2(80) = 160$.

time = 0.44, size = 166, normalized size = 1.78

method	result
derivativedivides	$\frac{ac \ln(\sec(fx+e)+\tan(fx+e)) - \frac{ade \ln(\sec(fx+e)+\tan(fx+e))}{f} + \frac{ad(-(fx+e) \ln(1+ie^{i(fx+e)})+(fx+e) \ln(1-ie^{i(fx+e)})+i \text{dilog}(1+ie^{i(fx+e)}, 1-ie^{i(fx+e)}))}{f}$
default	$\frac{ac \ln(\sec(fx+e)+\tan(fx+e)) - \frac{ade \ln(\sec(fx+e)+\tan(fx+e))}{f} + \frac{ad(-(fx+e) \ln(1+ie^{i(fx+e)})+(fx+e) \ln(1-ie^{i(fx+e)})+i \text{dilog}(1+ie^{i(fx+e)}, 1-ie^{i(fx+e)}))}{f}$

risch	$\frac{adx^2}{2} + acx - \frac{2iac \arctan(e^{i(fx+e)})}{f} - \frac{ad \ln(1+ie^{i(fx+e)})x}{f} - \frac{ad \ln(1+ie^{i(fx+e)})e}{f^2} + \frac{ad \ln(1-ie^{i(fx+e)})x}{f} +$
-------	---

Verification of antiderivative is not currently implemented for this CAS.

```
[In] int((d*x+c)*(a+a*sec(f*x+e)),x,method=_RETURNVERBOSE)
[Out] 1/f*(a*c*ln(sec(f*x+e)+tan(f*x+e))-a/f*d*e*ln(sec(f*x+e)+tan(f*x+e))+a/f*d*(-(f*x+e)*ln(1+I*exp(I*(f*x+e)))+(f*x+e)*ln(1-I*exp(I*(f*x+e)))+I*dilog(1+I*exp(I*(f*x+e)))-I*dilog(1-I*exp(I*(f*x+e))))+a*c*(f*x+e)-a/f*d*e*(f*x+e)+1/2*a/f*d*(f*x+e)^2)
```

Maxima [F]

time = 0.00, size = 0, normalized size = 0.00

Failed to integrate

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)*(a+a*sec(f*x+e)),x, algorithm="maxima")
[Out] 1/2*(a*d*f*x^2 + 2*a*c*f*x + 4*a*d*f*integrate((x*cos(2*f*x + 2*e)*cos(f*x + e) + x*sin(2*f*x + 2*e)*sin(f*x + e) + x*cos(f*x + e))/(cos(2*f*x + 2*e)^2 + sin(2*f*x + 2*e)^2 + 2*cos(2*f*x + 2*e) + 1), x) + a*c*log(cos(f*x + e)^2 + sin(f*x + e)^2 + 2*sin(f*x + e) + 1) - a*c*log(cos(f*x + e)^2 + sin(f*x + e)^2 - 2*sin(f*x + e) + 1))/f
```

Fricas [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 375 vs. 2(76) = 152.

time = 3.41, size = 375, normalized size = 4.03

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)*(a+a*sec(f*x+e)),x, algorithm="fricas")
[Out] 1/2*(a*d*f^2*x^2 + 2*a*c*f^2*x - I*a*d*dilog(I*cos(f*x + e) + sin(f*x + e)) - I*a*d*dilog(I*cos(f*x + e) - sin(f*x + e)) + I*a*d*dilog(-I*cos(f*x + e) + sin(f*x + e)) + I*a*d*dilog(-I*cos(f*x + e) - sin(f*x + e)) + (a*c*f - a*d*e)*log(cos(f*x + e) + I) - (a*c*f - a*d*e)*log(cos(f*x + e) - I) + (a*d*f*x + a*d*e)*log(I*cos(f*x + e) + sin(f*x + e) + 1) - (a*d*f*x + a*d*e)*log(I*cos(f*x + e) - sin(f*x + e) + 1) + (a*d*f*x + a*d*e)*log(-I*cos(f*x + e) + sin(f*x + e) + 1) - (a*d*f*x + a*d*e)*log(-I*cos(f*x + e) - sin(f*x + e) + 1) + (a*c*f - a*d*e)*log(-cos(f*x + e) + I) - (a*c*f - a*d*e)*log(-cos(f*x + e) - I*sin(f*x + e) + I))/f^2
```

Sympy [F]

time = 0.00, size = 0, normalized size = 0.00

$$a \left(\int c \, dx + \int c \sec(e + fx) \, dx + \int dx \, dx + \int dx \sec(e + fx) \, dx \right)$$

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate((d*x+c)*(a+a*sec(f*x+e)),x)`[Out] `a*(Integral(c, x) + Integral(c*sec(e + f*x), x) + Integral(d*x, x) + Integral(d*x*sec(e + f*x), x))`**Giac [F]**

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate((d*x+c)*(a+a*sec(f*x+e)),x, algorithm="giac")`[Out] `integrate((d*x + c)*(a*sec(f*x + e) + a), x)`**Mupad [F]**

time = 0.00, size = -1, normalized size = -0.01

$$\int \left(a + \frac{a}{\cos(e + fx)} \right) (c + dx) \, dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] `int((a + a/cos(e + f*x))*(c + d*x),x)`[Out] `int((a + a/cos(e + f*x))*(c + d*x), x)`

3.4 $\int \frac{a+a \sec(e+fx)}{c+dx} dx$

Optimal. Leaf size=21

$$\text{Int}\left(\frac{a + a \sec(e + fx)}{c + dx}, x\right)$$

[Out] Unintegrable((a+a*sec(f*x+e))/(d*x+c),x)

Rubi [A]

time = 0.02, antiderivative size = 0, normalized size of antiderivative = 0.00, number of steps used = 0, number of rules used = 0, integrand size = 0, $\frac{\text{number of rules}}{\text{integrand size}}$ = 0.000, Rules used = {}

$$\int \frac{a + a \sec(e + fx)}{c + dx} dx$$

Verification is not applicable to the result.

[In] Int[(a + a*Sec[e + f*x])/(c + d*x),x]

[Out] Defer[Int][(a + a*Sec[e + f*x])/(c + d*x), x]

Rubi steps

$$\int \frac{a + a \sec(e + fx)}{c + dx} dx = \int \frac{a + a \sec(e + fx)}{c + dx} dx$$

Mathematica [A]

time = 6.43, size = 0, normalized size = 0.00

$$\int \frac{a + a \sec(e + fx)}{c + dx} dx$$

Verification is not applicable to the result.

[In] Integrate[(a + a*Sec[e + f*x])/(c + d*x),x]

[Out] Integrate[(a + a*Sec[e + f*x])/(c + d*x), x]

Maple [A]

time = 0.26, size = 0, normalized size = 0.00

$$\int \frac{a + a \sec(fx + e)}{dx + c} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\int \frac{a+a\sec(fx+e)}{dx+c} dx$
[Out] $\int \frac{a+a\sec(fx+e)}{dx+c} dx$

Maxima [A]

time = 0.00, size = 0, normalized size = 0.00

Failed to integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}\left(\frac{a+a\sec(fx+e)}{dx+c}, x, \text{algorithm}=\text{"maxima"}\right)$
[Out] $\frac{(2*a*d*\text{integrate}((\cos(2*fx + 2*e)*\cos(fx + e) + \sin(2*fx + 2*e)*\sin(fx + e) + \cos(fx + e))/((dx + c)*\cos(2*fx + 2*e)^2 + (dx + c)*\sin(2*fx + 2*e)^2 + dx + 2*(dx + c)*\cos(2*fx + 2*e) + c), x) + a*\log(dx + c))}{d}$

Fricas [A]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}\left(\frac{a+a\sec(fx+e)}{dx+c}, x, \text{algorithm}=\text{"fricas"}\right)$
[Out] $\text{integral}\left(\frac{a*\sec(fx + e) + a}{dx + c}, x\right)$

Sympy [A]

time = 0.00, size = 0, normalized size = 0.00

$$a \left(\int \frac{\sec(e + fx)}{c + dx} dx + \int \frac{1}{c + dx} dx \right)$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}\left(\frac{a+a\sec(fx+e)}{dx+c}, x\right)$
[Out] $a*(\text{Integral}(\sec(e + fx)/(c + dx), x) + \text{Integral}(1/(c + dx), x))$

Giac [A]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}\left(\frac{a+a\sec(fx+e)}{dx+c}, x, \text{algorithm}=\text{"giac"}\right)$
[Out] $\text{integrate}\left(\frac{a*\sec(fx + e) + a}{dx + c}, x\right)$

Mupad [A]

time = 0.00, size = -1, normalized size = -0.05

$$\int \frac{a + \frac{a}{\cos(e+fx)}}{c + dx} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] `int((a + a/cos(e + f*x))/(c + d*x),x)`[Out] `int((a + a/cos(e + f*x))/(c + d*x), x)`

3.5 $\int \frac{a+a \sec(e+fx)}{(c+dx)^2} dx$

Optimal. Leaf size=21

$$\text{Int}\left(\frac{a + a \sec(e + fx)}{(c + dx)^2}, x\right)$$

[Out] Unintegrable((a+a*sec(f*x+e))/(d*x+c)^2,x)

Rubi [A]

time = 0.02, antiderivative size = 0, normalized size of antiderivative = 0.00, number of steps used = 0, number of rules used = 0, integrand size = 0, $\frac{\text{number of rules}}{\text{integrand size}} = 0.000$, Rules used = {}

$$\int \frac{a + a \sec(e + fx)}{(c + dx)^2} dx$$

Verification is not applicable to the result.

[In] Int[(a + a*Sec[e + f*x])/(c + d*x)^2,x]

[Out] Defer[Int][(a + a*Sec[e + f*x])/(c + d*x)^2, x]

Rubi steps

$$\int \frac{a + a \sec(e + fx)}{(c + dx)^2} dx = \int \frac{a + a \sec(e + fx)}{(c + dx)^2} dx$$

Mathematica [A]

time = 6.42, size = 0, normalized size = 0.00

$$\int \frac{a + a \sec(e + fx)}{(c + dx)^2} dx$$

Verification is not applicable to the result.

[In] Integrate[(a + a*Sec[e + f*x])/(c + d*x)^2,x]

[Out] Integrate[(a + a*Sec[e + f*x])/(c + d*x)^2, x]

Maple [A]

time = 0.27, size = 0, normalized size = 0.00

$$\int \frac{a + a \sec(fx + e)}{(dx + c)^2} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\int \frac{(a+a\sec(fx+e))}{(dx+c)^2} dx$
[Out] $\int \frac{(a+a\sec(fx+e))}{(dx+c)^2} dx$

Maxima [A]

time = 0.00, size = 0, normalized size = 0.00

Failed to integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((a+a\sec(fx+e)) / (dx+c)^2, x, \text{algorithm}=\text{"maxima"})$
[Out] $(2*(a*d^2*x + a*c*d)*\text{integrate}((\cos(2fx + 2e)*\cos(fx + e) + \sin(2fx + 2e)*\sin(fx + e) + \cos(fx + e)) / (d^2*x^2 + 2*c*d*x + (d^2*x^2 + 2*c*d*x + c^2)*\cos(2fx + 2e)^2 + (d^2*x^2 + 2*c*d*x + c^2)*\sin(2fx + 2e)^2 + c^2 + 2*(d^2*x^2 + 2*c*d*x + c^2)*\cos(2fx + 2e)), x) - a) / (d^2*x + c*d)$

Fricas [A]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((a+a\sec(fx+e)) / (dx+c)^2, x, \text{algorithm}=\text{"fricas"})$
[Out] $\text{integral}(a*\sec(fx + e) + a) / (d^2*x^2 + 2*c*d*x + c^2), x)$

Sympy [A]

time = 0.00, size = 0, normalized size = 0.00

$$a \left(\int \frac{\sec(e + fx)}{c^2 + 2cdx + d^2x^2} dx + \int \frac{1}{c^2 + 2cdx + d^2x^2} dx \right)$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((a+a\sec(fx+e)) / (dx+c)^2, x)$
[Out] $a * (\text{Integral}(\sec(e + fx) / (c^2 + 2*c*d*x + d^2*x^2), x) + \text{Integral}(1 / (c^2 + 2*c*d*x + d^2*x^2), x))$

Giac [A]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((a+a\sec(fx+e)) / (dx+c)^2, x, \text{algorithm}=\text{"giac"})$

[Out] integrate((a*sec(f*x + e) + a)/(d*x + c)^2, x)

Mupad [A]

time = 0.00, size = -1, normalized size = -0.05

$$\int \frac{a + \frac{a}{\cos(e+fx)}}{(c+dx)^2} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] int((a + a/cos(e + f*x))/(c + d*x)^2,x)

[Out] int((a + a/cos(e + f*x))/(c + d*x)^2, x)

$$\mathbf{3.6} \quad \int (c + dx)^3 (a + a \sec(e + fx))^2 dx$$

Optimal. Leaf size=371

$$-\frac{ia^2(c+dx)^3}{f} + \frac{a^2(c+dx)^4}{4d} - \frac{4ia^2(c+dx)^3 \operatorname{ArcTan}(e^{i(e+fx)})}{f} + \frac{3a^2d(c+dx)^2 \log(1+e^{2i(e+fx)})}{f^2} + \frac{6ia^2d(c+dx)^3 \operatorname{arctan}(e^{i(e+fx)})}{f^3}$$

[Out] $-\text{I}\cdot a^2\cdot (\text{d}\cdot x+c)^3/f + 1/4\cdot a^2\cdot (\text{d}\cdot x+c)^4/d - 4\cdot \text{I}\cdot a^2\cdot (\text{d}\cdot x+c)^3\cdot \operatorname{arctan}(\exp(\text{I}\cdot(\text{f}\cdot x+e)))/f + 3\cdot a^2\cdot \text{d}\cdot (\text{d}\cdot x+c)^2\cdot \ln(1+\exp(2\cdot \text{I}\cdot(\text{f}\cdot x+e)))/f^2 + 6\cdot \text{I}\cdot a^2\cdot \text{d}\cdot (\text{d}\cdot x+c)^2\cdot \operatorname{polylog}(2,\exp(\text{I}\cdot(\text{f}\cdot x+e)))/f^3 - 2\cdot \text{I}\cdot a^2\cdot \text{d}\cdot (\text{d}\cdot x+c)^2\cdot \operatorname{polylog}(2,-\exp(2\cdot \text{I}\cdot(\text{f}\cdot x+e)))/f^4 - 3\cdot a^2\cdot \text{d}\cdot (\text{d}\cdot x+c)^2\cdot \operatorname{d}\cdot (\text{d}\cdot x+c)\cdot \operatorname{polylog}(3,-\text{I}\cdot \exp(\text{I}\cdot(\text{f}\cdot x+e)))/f^5 + 12\cdot a^2\cdot \text{d}\cdot (\text{d}\cdot x+c)^2\cdot \operatorname{d}\cdot (\text{d}\cdot x+c)\cdot \operatorname{polylog}(3,\exp(\text{I}\cdot(\text{f}\cdot x+e)))/f^6 + 3\cdot 2\cdot a^2\cdot \text{d}\cdot (\text{d}\cdot x+c)^3\cdot \operatorname{polylog}(3,-\exp(2\cdot \text{I}\cdot(\text{f}\cdot x+e)))/f^7 - 12\cdot \text{I}\cdot a^2\cdot \text{d}\cdot (\text{d}\cdot x+c)^3\cdot \operatorname{polylog}(4,-\text{I}\cdot \exp(\text{I}\cdot(\text{f}\cdot x+e)))/f^8 + 12\cdot \text{I}\cdot a^2\cdot \text{d}\cdot (\text{d}\cdot x+c)^3\cdot \operatorname{polylog}(4,\exp(\text{I}\cdot(\text{f}\cdot x+e)))/f^9 + 4\cdot a^2\cdot (\text{d}\cdot x+c)^3\cdot \tan(\text{f}\cdot x+e)/f$

Rubi [A]

time = 0.32, antiderivative size = 371, normalized size of antiderivative = 1.00, number of steps used = 17, number of rules used = 9, integrand size = 20, $\frac{\text{number of rules}}{\text{integrand size}} = 0.450$, Rules used = {4275, 4266, 2611, 6744, 2320, 6724, 4269, 3800, 2221}

$$\frac{4ia^2(c+dx)^3 \operatorname{ArcTan}(e^{i(e+fx)})}{f} - \frac{3ia^2d(c+dx) \operatorname{Li}_2(-e^{2i(e+fx)})}{f^2} - \frac{12a^2d^2(c+dx) \operatorname{Li}_3(-ie^{i(e+fx)})}{f^3} + \frac{12a^2d^2(c+dx) \operatorname{Li}_3(ie^{i(e+fx)})}{f^3} + \frac{6ia^2d(c+dx)^2 \operatorname{Li}_2(-ie^{i(e+fx)})}{f^2} - \frac{6ia^2d(c+dx)^2 \operatorname{Li}_2(ie^{i(e+fx)})}{f^2} + \frac{3a^2d(c+dx)^3 \log(1+e^{2i(e+fx)})}{f^3} + \frac{a^2(c+dx)^3 \tan(e+fx)}{f} - \frac{ia^2(c+dx)^3}{f} + \frac{a^2(c+dx)^4}{4d} + \frac{3a^2d^2 \operatorname{Li}_2(-e^{2i(e+fx)})}{2f^4} - \frac{12ia^2d^2 \operatorname{Li}_2(-ie^{i(e+fx)})}{f^4} + \frac{12ia^2d^2 \operatorname{Li}_2(ie^{i(e+fx)})}{f^4}$$

Antiderivative was successfully verified.

$$[\text{In}] \quad \text{Int}[(c + d*x)^3 * (a + a*\text{Sec}[e + f*x])^2, x]$$

[Out] $((-\text{I})\cdot a^2\cdot (\text{c} + \text{d}\cdot x)^3)/\text{f} + (\text{a}^2\cdot (\text{c} + \text{d}\cdot x)^4)/(4\cdot \text{d}) - ((4\cdot \text{I})\cdot a^2\cdot (\text{c} + \text{d}\cdot x)^3 \cdot \operatorname{ArcTan}[\text{E}^{\wedge}(\text{I}\cdot(\text{e} + \text{f}\cdot x))])/f + (3\cdot a^2\cdot \text{d}\cdot (\text{c} + \text{d}\cdot x)^2\cdot \operatorname{Log}[1 + \text{E}^{\wedge}((2\cdot \text{I})\cdot(\text{e} + \text{f}\cdot x))])/f^2 + ((6\cdot \text{I})\cdot a^2\cdot \text{d}\cdot (\text{c} + \text{d}\cdot x)^2\cdot \operatorname{PolyLog}[2, -\text{I}\cdot \text{E}^{\wedge}(\text{I}\cdot(\text{e} + \text{f}\cdot x))])/f^2 - ((6\cdot \text{I})\cdot a^2\cdot \text{d}\cdot (\text{c} + \text{d}\cdot x)^2\cdot \operatorname{PolyLog}[2, \text{I}\cdot \text{E}^{\wedge}(\text{I}\cdot(\text{e} + \text{f}\cdot x))])/f^2 - ((3\cdot \text{I})\cdot a^2\cdot \text{d}^2\cdot (\text{c} + \text{d}\cdot x)\cdot \operatorname{PolyLog}[2, -\text{E}^{\wedge}((2\cdot \text{I})\cdot(\text{e} + \text{f}\cdot x))])/f^3 - (12\cdot a^2\cdot \text{d}^2\cdot (\text{c} + \text{d}\cdot x)\cdot \operatorname{PolyLog}[3, -\text{I}\cdot \text{E}^{\wedge}(\text{I}\cdot(\text{e} + \text{f}\cdot x))])/f^3 + (12\cdot a^2\cdot \text{d}^2\cdot (\text{c} + \text{d}\cdot x)\cdot \operatorname{PolyLog}[3, \text{I}\cdot \text{E}^{\wedge}(\text{I}\cdot(\text{e} + \text{f}\cdot x))])/f^3 + (3\cdot a^2\cdot \text{d}^3\cdot \operatorname{PolyLog}[3, -\text{E}^{\wedge}((2\cdot \text{I})\cdot(\text{e} + \text{f}\cdot x))])/(2\cdot \text{f}^4) - ((12\cdot \text{I})\cdot a^2\cdot \text{d}^3\cdot \operatorname{PolyLog}[4, -\text{I}\cdot \text{E}^{\wedge}(\text{I}\cdot(\text{e} + \text{f}\cdot x))])/f^4 + ((12\cdot \text{I})\cdot a^2\cdot \text{d}^3\cdot \operatorname{PolyLog}[4, \text{I}\cdot \text{E}^{\wedge}(\text{I}\cdot(\text{e} + \text{f}\cdot x))])/f^4 + (\text{a}^2\cdot (\text{c} + \text{d}\cdot x)^3\cdot \operatorname{Tan}[e + f\cdot x])/f$

Rule 2221

```
Int[((F_)^((g_.)*(e_.) + (f_.)*(x_.)))^(n_.)*((c_.) + (d_.)*(x_.))^(m_.))/((a_) + (b_)*(F_)^((g_.)*(e_.) + (f_.)*(x_.)))^(n_.)), x_Symbol] := Simp[((c + d*x)^m/(b*f*g*n*Log[F]))*Log[1 + b*((F^(g*(e + f*x)))^n/a)], x] - Dist[d*(m/(b*f*g*n*Log[F])), Int[(c + d*x)^(m - 1)*Log[1 + b*((F^(g*(e + f*x)))^n/a)], x], x]; FreeQ[{F, a, b, c, d, e, f, g, n}, x] && IGtQ[m, 0]
```

Rule 2320

```
Int[u_, x_Symbol] :> With[{v = FunctionOfExponential[u, x]}, Dist[v/D[v, x], Subst[Int[FunctionOfExponentialFunction[u, x]/x, x], x, v], x]] /; FunctionOfExponentialQ[u, x] && !MatchQ[u, (w_)*((a_.)*(v_)^(n_))^(m_)] /; FreeQ[{a, m, n}, x] && IntegerQ[m*n] && !MatchQ[u, E^((c_.)*((a_.) + (b_.)*x))* (F_)[v_]] /; FreeQ[{a, b, c}, x] && InverseFunctionQ[F[x]]]
```

Rule 2611

```
Int[Log[1 + (e_)*((F_)^((c_.)*((a_.) + (b_.)*(x_))))^(n_.)]*((f_.) + (g_.)* (x_))^(m_), x_Symbol] :> Simp[(-(f + g*x)^m)*(PolyLog[2, (-e)*(F^(c*(a + b*x)))^n]/(b*c*n*Log[F])), x] + Dist[g*(m/(b*c*n*Log[F])), Int[(f + g*x)^(m - 1)*PolyLog[2, (-e)*(F^(c*(a + b*x)))^n], x], x] /; FreeQ[{F, a, b, c, e, f, g, n}, x] && GtQ[m, 0]
```

Rule 3800

```
Int[((c_.) + (d_.)*(x_))^(m_)*tan[(e_.) + (f_.)*(x_)], x_Symbol] :> Simp[I*((c + d*x)^(m + 1)/(d*(m + 1))), x] - Dist[2*I, Int[(c + d*x)^m*(E^(2*I*(e + f*x))/(1 + E^(2*I*(e + f*x)))), x], x] /; FreeQ[{c, d, e, f}, x] && IGtQ[m, 0]
```

Rule 4266

```
Int[csc[(e_.) + Pi*(k_.) + (f_.)*(x_)]*((c_.) + (d_.)*(x_))^(m_), x_Symbol] :> Simp[-2*(c + d*x)^m*(ArcTanh[E^(I*k*Pi)*E^(I*(e + f*x))]/f), x] + (-Dist[d*(m/f), Int[(c + d*x)^(m - 1)*Log[1 - E^(I*k*Pi)*E^(I*(e + f*x))], x], x] + Dist[d*(m/f), Int[(c + d*x)^(m - 1)*Log[1 + E^(I*k*Pi)*E^(I*(e + f*x))], x], x]) /; FreeQ[{c, d, e, f}, x] && IntegerQ[2*k] && IGtQ[m, 0]
```

Rule 4269

```
Int[csc[(e_.) + (f_.)*(x_)]^2*((c_.) + (d_.)*(x_))^(m_), x_Symbol] :> Simp[(-(c + d*x)^m)*(Cot[e + f*x]/f), x] + Dist[d*(m/f), Int[(c + d*x)^(m - 1)* Cot[e + f*x], x], x] /; FreeQ[{c, d, e, f}, x] && GtQ[m, 0]
```

Rule 4275

```
Int[(csc[(e_.) + (f_.)*(x_)]*(b_.) + (a_.))^n*((c_.) + (d_.)*(x_))^(m_), x_Symbol] :> Int[ExpandIntegrand[(c + d*x)^m, (a + b*Csc[e + f*x])^n, x], x] /; FreeQ[{a, b, c, d, e, f, m}, x] && IGtQ[m, 0] && IGtQ[n, 0]
```

Rule 6724

```
Int[PolyLog[n_, (c_.)*((a_.) + (b_.)*(x_))^(p_.)]/((d_.) + (e_.)*(x_)), x_Symbol] :> Simp[PolyLog[n + 1, c*(a + b*x)^p]/(e*p), x] /; FreeQ[{a, b, c, d, e, n, p}, x] && EqQ[b*d, a*e]
```

Rule 6744

```
Int[((e_.) + (f_)*(x_))^(m_)*PolyLog[n_, (d_)*((F_)^((c_.)*((a_.) + (b_.*(x_))))^p_)], x_Symbol] :> Simp[(e + f*x)^m*(PolyLog[n + 1, d*(F^(c*(a + b*x)))^p]/(b*c*p*Log[F])), x] - Dist[f*(m/(b*c*p*Log[F])), Int[(e + f*x)^(m - 1)*PolyLog[n + 1, d*(F^(c*(a + b*x)))^p], x], x] /; FreeQ[{F, a, b, c, d, e, f, n, p}, x] && GtQ[m, 0]
```

Rubi steps

$$\begin{aligned}
\int (c + dx)^3 (a + a \sec(e + fx))^2 dx &= \int (a^2(c + dx)^3 + 2a^2(c + dx)^3 \sec(e + fx) + a^2(c + dx)^3 \sec^2(e + fx)) \\
&= \frac{a^2(c + dx)^4}{4d} + a^2 \int (c + dx)^3 \sec^2(e + fx) dx + (2a^2) \int (c + dx)^3 \sec(e + fx) dx \\
&= \frac{a^2(c + dx)^4}{4d} - \frac{4ia^2(c + dx)^3 \tan^{-1}(e^{i(e+fx)})}{f} + \frac{a^2(c + dx)^3 \tan(e + fx)}{f} \\
&= -\frac{ia^2(c + dx)^3}{f} + \frac{a^2(c + dx)^4}{4d} - \frac{4ia^2(c + dx)^3 \tan^{-1}(e^{i(e+fx)})}{f} + \frac{6ia^2d(c + dx)^3}{f} \\
&= -\frac{ia^2(c + dx)^3}{f} + \frac{a^2(c + dx)^4}{4d} - \frac{4ia^2(c + dx)^3 \tan^{-1}(e^{i(e+fx)})}{f} + \frac{3a^2d(c + dx)^3}{f} \\
&= -\frac{ia^2(c + dx)^3}{f} + \frac{a^2(c + dx)^4}{4d} - \frac{4ia^2(c + dx)^3 \tan^{-1}(e^{i(e+fx)})}{f} + \frac{3a^2d(c + dx)^3}{f} \\
&= -\frac{ia^2(c + dx)^3}{f} + \frac{a^2(c + dx)^4}{4d} - \frac{4ia^2(c + dx)^3 \tan^{-1}(e^{i(e+fx)})}{f} + \frac{3a^2d(c + dx)^3}{f}
\end{aligned}$$

Mathematica [B] Both result and optimal contain complex but leaf count is larger than twice the leaf count of optimal. 811 vs. $2(371) = 742$.
time = 8.57, size = 811, normalized size = 2.19

Warning: Unable to verify antiderivative.

```
[In] Integrate[(c + d*x)^3*(a + a*Sec[e + f*x])^2, x]
[Out] (a^2*(1 + Cos[e + f*x])^2*Sec[(e + f*x)/2]^4*(x*(4*c^3 + 6*c^2*d*x + 4*c*d^2*x^2 + d^3*x^3) + (4*(c + d*x)^3*Sin[(f*x)/2])/(f*(Cos[e/2] - Sin[e/2]))*(Cos[(e + f*x)/2] - Sin[(e + f*x)/2]) + (4*(c + d*x)^3*Sin[(f*x)/2])/(f*(Cos[e/2] - Sin[e/2])))
```

$$\begin{aligned}
& [e/2] + \text{Sin}[e/2]) * (\text{Cos}[(e + f*x)/2] + \text{Sin}[(e + f*x)/2])) - ((2*I) * (6*c^2*d*f^3*x + 6*c*d^2*f^3*x^2 + 2*d^3*f^3*x^3 + 8*c^3*f^3*\text{ArcTan}[\text{Cos}[e + f*x] + I*\text{Sin}[e + f*x]] + 24*c^2*d*f^3*x*\text{ArcTan}[\text{Cos}[e + f*x] + I*\text{Sin}[e + f*x]] + 24*c*d^2*f^3*x^2*\text{ArcTan}[\text{Cos}[e + f*x] + I*\text{Sin}[e + f*x]] + (6*I)*c^2*d*f^2*\text{Log}[1 + \text{Cos}[2*(e + f*x)] + I*\text{Sin}[2*(e + f*x)] + (12*I)*c*d^2*f^2*x*\text{Log}[1 + \text{Cos}[2*(e + f*x)] + I*\text{Sin}[2*(e + f*x)] + (6*I)*d^3*f^2*x^2*\text{Log}[1 + \text{Cos}[2*(e + f*x)] + I*\text{Sin}[2*(e + f*x)] + 12*d*f^2*(c + d*x)^2*\text{PolyLog}[2, I*\text{Cos}[e + f*x] - \text{Sin}[e + f*x]] - 12*d*f^2*(c + d*x)^2*\text{PolyLog}[2, (-I)*\text{Cos}[e + f*x] + \text{Sin}[e + f*x]] + 6*c*d^2*f*\text{PolyLog}[2, -\text{Cos}[2*(e + f*x)] - I*\text{Sin}[2*(e + f*x)] + 6*d^3*f*x*\text{PolyLog}[2, -\text{Cos}[2*(e + f*x)] - I*\text{Sin}[2*(e + f*x)] + (24*I)*c*d^2*f*\text{PolyLog}[3, I*\text{Cos}[e + f*x] - \text{Sin}[e + f*x]] + (24*I)*d^3*f*x*\text{PolyLog}[3, I*\text{Cos}[e + f*x] - \text{Sin}[e + f*x]] - (24*I)*c*d^2*f*\text{PolyLog}[3, (-I)*\text{Cos}[e + f*x] + \text{Sin}[e + f*x]] - (24*I)*d^3*f*x*\text{PolyLog}[3, (-I)*\text{Cos}[e + f*x] + \text{Sin}[e + f*x]] + (3*I)*d^3*\text{PolyLog}[3, -\text{Cos}[2*(e + f*x)] - I*\text{Sin}[2*(e + f*x)] + 24*d^3*\text{PolyLog}[4, I*\text{Cos}[e + f*x] - \text{Sin}[e + f*x]] + 24*d^3*\text{PolyLog}[4, (-I)*\text{Cos}[e + f*x] + \text{Sin}[e + f*x]] + (6*I)*c^2*d*f^3*x*\text{Tan}[e] + (6*I)*c*d^2*f^3*x^2*\text{Tan}[e] + (2*I)*d^3*f^3*x^3*\text{Tan}[e]])))/f^4))/16
\end{aligned}$$

Maple [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 1516 vs. 2(334) = 668.

time = 1.10, size = 1517, normalized size = 4.09

method	result	size
risch	Expression too large to display	1517

Verification of antiderivative is not currently implemented for this CAS.

```

[In] int((d*x+c)^3*(a+a*sec(f*x+e))^2,x,method=_RETURNVERBOSE)

[Out] 12*I/f^2*a^2*d^2*c*polylog(2,-I*exp(I*(f*x+e)))*x-12*I/f^3*a^2*c*d^2*e^2*arctan(exp(I*(f*x+e)))+12*I/f^2*a^2*c^2*d*e*arctan(exp(I*(f*x+e)))-12*I/f^2*a^2*d^2*c*polylog(2,I*exp(I*(f*x+e)))*x-12*I/f^2*a^2*c*d^2*e*x+3/f^2*a^2*d^3*ln(1+I*exp(I*(f*x+e)))*x^2-12*I*a^2*d^3*polylog(4,-I*exp(I*(f*x+e)))/f^4+1/4*a^2*d^3*x^4+1/4*a^2/d*c^4+12*I*a^2*d^3*polylog(4,I*exp(I*(f*x+e)))/f^4-2*I/f*a^2*d^3*x^3-4*I/f*a^2*c^3*arctan(exp(I*(f*x+e)))-6/f^3*a^2*e*d^3*ln(exp(2*I*(f*x+e))+1)*x+12/f^3*a^2*c*d^2*e*ln(exp(I*(f*x+e)))+6/f^2*a^2*c*d^2*ln(exp(2*I*(f*x+e))+1)*x+6/f^3*a^2*c*d^2*ln(1+I*exp(I*(f*x+e)))+6/f^3*a^2*d^3*ln(1+I*exp(I*(f*x+e)))*e*x-6/f*a^2*d^2*c*ln(1+I*exp(I*(f*x+e)))*x^2+6/f^3*a^2*d^3*ln(1-I*exp(I*(f*x+e)))*e*x+6/f*a^2*d^2*c*ln(1-I*exp(I*(f*x+e)))*x^2-6/f*a^2*c^2*d*ln(1+I*exp(I*(f*x+e)))*x-6/f^3*a^2*c*d^2*ln(1-I*exp(I*(f*x+e)))+6/f^2*a^2*c^2*d*ln(1-I*exp(I*(f*x+e)))*e-6/f^2*a^2*c^2*d*ln(1+I*exp(I*(f*x+e)))*e+3*I/f^4*a^2*c*d^3*polylog(2,-exp(2*I*(f*x+e)))-6*I/f^4*a^2*d^3*polylog(2,I*exp(I*(f*x+e)))*e-6*I/f^2*a^2*c^2*d*polylog(2,I*exp(I*(f*x+e)))*x^2+6*I/f^2*a^2*c^2*d*polylog(2,-I*exp(I*(f*x+e)))-6*I/f^3*a^2*d^3*polylog(2,-I*exp(I*(f*x+e)))*x

```

$$\begin{aligned}
& -6*I/f^4*a^2*d^3*polylog(2, -I*exp(I*(f*x+e)))*e + 4*I/f^4*a^2*d^3*e^3*arctan(exp(I*(f*x+e))) - 6*I/f*a^2*c*d^2*x^2 + 6*I/f^3*a^2*d^3*e^2*x - 6*I/f^3*a^2*d^3*polylog(2, I*exp(I*(f*x+e)))*x + 6/f*a^2*c^2*d*ln(1-I*exp(I*(f*x+e)))*x - 3*I/f^3*a^2*c*d^2*polylog(2, -exp(2*I*(f*x+e)))*x^2 - 6*I/f^3*a^2*c^2*d^2*f*a^2*d^3*ln(1-I*exp(I*(f*x+e)))*x^3 - 2/f*a^2*d^3*ln(1+I*exp(I*(f*x+e)))*x^3 + 3/f^4*a^2*d^3*ln(1-I*exp(I*(f*x+e)))*e^2 - 6/f^4*a^2*d^3*e^2*ln(exp(I*(f*x+e)))*x^2 - 12/f^3*a^2*d^2*c*polylog(3, I*exp(I*(f*x+e)))*x^2 + 3/f^2*a^2*d^3*ln(1-I*exp(I*(f*x+e)))*x^2 - 12/f^3*a^2*d^3*polylog(3, -I*exp(I*(f*x+e)))*x^2 + 4*I/f^4*a^2*c^3*d^3*a^2*d^2*c*x^3 + 3/2*a^2*d*c^2*x^2 + a^2*c^3*x^2/f^4*a^2*d^3*ln(1-I*exp(I*(f*x+e)))*x^2 - 12/f^3*a^2*d^3*polylog(3, -I*exp(I*(f*x+e)))*x^2 + 2*I*a^2*(d^3*x^3 + 3*c*d^2*x^2 + 3*c^2*d*x + c^3)/f/(exp(2*I*(f*x+e))+1) - 3/f^4*a^2*c^2*d^3*ln(exp(2*I*(f*x+e))+1) - 2/f^4*a^2*c^3*d^3*ln(1+I*exp(I*(f*x+e)))*x^2 + 12/f^3*a^2*d^3*polylog(3, I*exp(I*(f*x+e)))*x^3 + 3/f^2*a^2*c^2*d*ln(exp(2*I*(f*x+e))+1) + 6/f^4*a^2*d^3*polylog(3, I*exp(I*(f*x+e)))*x^2 + 6/f^4*a^2*d^3*polylog(3, -I*exp(I*(f*x+e)))
\end{aligned}$$

Maxima [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 3584 vs. 2(329) = 658.

time = 0.95, size = 3584, normalized size = 9.66

Too large to display

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)^3*(a+a*sec(f*x+e))^2,x, algorithm="maxima")
[Out] 1/4*(4*(f*x + e)*a^2*c^3 + (f*x + e)^4*a^2*d^3/f^3 + 4*(f*x + e)^3*a^2*c*d^2/f^2 + 6*(f*x + e)^2*a^2*c^2*d/f - 4*(f*x + e)^3*a^2*d^3*e/f^3 - 12*(f*x + e)^2*a^2*c*d^2*e/f^2 - 12*(f*x + e)*a^2*c^2*d*e/f + 8*a^2*c^3*log(sec(f*x + e) + tan(f*x + e)) - 24*a^2*c^2*d*e*log(sec(f*x + e) + tan(f*x + e))/f + 6*(f*x + e)^2*a^2*d^3*e^2/f^3 + 12*(f*x + e)*a^2*c*d^2*e^2/f^2 + 24*a^2*c*d^2*e^2*log(sec(f*x + e) + tan(f*x + e))/f^2 - 4*(f*x + e)*a^2*d^3*e^3/f^3 - 8*a^2*d^3*e^3*log(sec(f*x + e) + tan(f*x + e))/f^3 + 4*(4*a^2*c^3*f^3 - 12*a^2*c^2*d*f^2*e + 12*a^2*c*d^2*f*e^2 - 4*a^2*d^3*e^3 - 4*((f*x + e)^3*a^2*d^3 + 3*(a^2*c*d^2*f - a^2*d^3*e)*(f*x + e)^2 + 3*(a^2*c^2*d*f^2 - 2*a^2*c*d^2*f*e + a^2*d^3*e^2)*(f*x + e) + ((f*x + e)^3*a^2*d^3 + 3*(a^2*c*d^2*f - a^2*d^3*e)*(f*x + e)^2 + 3*(a^2*c^2*d*f^2 - 2*a^2*c*d^2*f*e + a^2*d^3*e^2)*(f*x + e))*cos(2*f*x + 2*e) + (I*(f*x + e)^3*a^2*d^3 + 3*(I*a^2*c*d^2*f - I*a^2*d^3*e)*(f*x + e)^2 + 3*(I*a^2*c^2*d*f^2 - 2*I*a^2*c*d^2*f*e + I*a^2*d^3*e^2)*(f*x + e))*sin(2*f*x + 2*e))*arctan2(cos(f*x + e), sin(f*x + e) + 1) - 4*((f*x + e)^3*a^2*d^3 + 3*(a^2*c*d^2*f - a^2*d^3*e)*(f*x + e)^2 + 3*(a^2*c^2*d*f^2 - 2*a^2*c*d^2*f*e + a^2*d^3*e^2)*(f*x + e) + ((f*x + e)^3*a^2*d^3 + 3*(a^2*c*d^2*f - a^2*d^3*e)*(f*x + e)^2 + 3*(a^2*c^2*d*f^2 - 2*a^2*c*d^2*f*e + a^2*d^3*e^2)*(f*x + e))*cos(2*f*x + 2*e) + (I*(f*x + e)^3*a^2*d^3 + 3*(I*a^2*c*d^2*f - I*a^2*d^3*e)*(f*x + e)^2 + 3*(I*a^2*c^2*d*f^2 - 2*I*a^2*c*d^3)*e^2)

```

$$\begin{aligned}
& 2*c*d^2*f*e + I*a^2*d^3*e^2)*(f*x + e))*\sin(2*f*x + 2*e))*\arctan2(\cos(f*x + e), -\sin(f*x + e) + 1) + 6*((f*x + e)^2*a^2*d^3 + a^2*c^2*d*f^2 - 2*a^2*c*d^2*f^2 + a^2*d^3*e^2 + 2*(a^2*c*d^2*f^2 - a^2*d^3*e^2)*(f*x + e) + ((f*x + e)^2*a^2*d^3 + a^2*c^2*d*f^2 - 2*a^2*c*d^2*f^2 + a^2*d^3*e^2 + 2*(a^2*c*d^2*f^2 - a^2*d^3*e^2)*(f*x + e))*\cos(2*f*x + 2*e) - (-I*(f*x + e)^2*a^2*d^3 - I*a^2*c^2*d*f^2 + 2*I*a^2*c*d^2*f^2 - I*a^2*d^3*e^2 + 2*(-I*a^2*c*d^2*f^2 + I*a^2*d^3*e^2)*(f*x + e))*\sin(2*f*x + 2*e))*\arctan2(\sin(2*f*x + 2*e), \cos(2*f*x + 2*e) + 1) - 4*((f*x + e)^3*a^2*d^3 + 3*(a^2*c*d^2*f^2 - a^2*d^3*e^2)*(f*x + e)^2 + 3*(a^2*c^2*d*f^2 - 2*a^2*c*d^2*f^2 + a^2*d^3*e^2)*(f*x + e))*\cos(2*f*x + 2*e) - 6*((f*x + e)*a^2*d^3 + a^2*c*d^2*f^2 - a^2*d^3*e^2 + ((f*x + e)*a^2*d^3 + a^2*c*d^2*f^2 - a^2*d^3*e^2)*(f*x + e))*\cos(2*f*x + 2*e) + (I*(f*x + e)*a^2*d^3 + I*a^2*c*d^2*f^2 - I*a^2*d^3*e^2)*\sin(2*f*x + 2*e))*\dilog(-e^(2*I*f*x + 2*I*e)) - 12*((f*x + e)^2*a^2*d^3 + a^2*c^2*d*f^2 - 2*a^2*c*d^2*f^2 + a^2*d^3*e^2 + 2*(a^2*c*d^2*f^2 - a^2*d^3*e^2)*(f*x + e) + ((f*x + e)^2*a^2*d^3 + a^2*c^2*d*f^2 - 2*I*a^2*c*d^2*f^2 + I*a^2*c^2*d^2*f^2 + I*a^2*d^3*e^2 + 2*(I*a^2*c*d^2*f^2 - I*a^2*d^3*e^2)*(f*x + e))*\sin(2*f*x + 2*e))*\dilog(I*e^(I*f*x + I*e)) + 12*((f*x + e)^2*a^2*d^3 + a^2*c^2*d*f^2 - 2*a^2*c*d^2*f^2 + a^2*d^3*e^2 + 2*(a^2*c*d^2*f^2 - a^2*d^3*e^2)*(f*x + e) + ((f*x + e)^2*a^2*d^3 + a^2*c^2*d*f^2 - 2*a^2*c*d^2*f^2 + a^2*d^3*e^2 + 2*(a^2*c*d^2*f^2 - a^2*d^3*e^2)*(f*x + e))*\cos(2*f*x + 2*e) - (-I*(f*x + e)^2*a^2*d^3 - I*a^2*c^2*d*f^2 + 2*I*a^2*c*d^2*f^2 - I*a^2*d^3*e^2 + 2*(-I*a^2*c*d^2*f^2 + I*a^2*d^3*e^2)*(f*x + e))*\sin(2*f*x + 2*e))*\dilog(-I*e^(I*f*x + I*e)) - 3*(I*(f*x + e)^2*a^2*d^3 + I*a^2*c^2*d*f^2 - 2*I*a^2*c*d^2*f^2 + I*a^2*d^3*e^2 + 2*(I*a^2*c*d^2*f^2 - I*a^2*d^3*e^2)*(f*x + e) + (I*(f*x + e)^2*a^2*d^3 + I*a^2*c^2*d*f^2 - 2*I*a^2*c*d^2*f^2 + I*a^2*d^3*e^2 + 2*(I*a^2*c*d^2*f^2 - I*a^2*d^3*e^2)*(f*x + e))*\cos(2*f*x + 2*e) - ((f*x + e)^2*a^2*d^3 + a^2*c^2*d*f^2 - 2*a^2*c*d^2*f^2 + a^2*d^3*e^2 + 2*(a^2*c*d^2*f^2 - a^2*d^3*e^2)*(f*x + e))*\sin(2*f*x + 2*e))*\log(\cos(2*f*x + 2*e)^2 + \sin(2*f*x + 2*e)^2 + 2*\cos(2*f*x + 2*e) + 1) - 2*(I*(f*x + e)^3*a^2*d^3 + 3*(I*a^2*c*d^2*f^2 - I*a^2*d^3*e^2)*(f*x + e)^2 + 3*(I*a^2*c^2*d*f^2 - 2*I*a^2*d^3*e^2)*(f*x + e) + (I*(f*x + e)^3*a^2*d^3 + 3*(I*a^2*c*d^2*f^2 - I*a^2*d^3*e^2)*(f*x + e)^2 + 3*(I*a^2*c^2*d*f^2 - 2*I*a^2*c*d^2*f^2 + I*a^2*d^3*e^2)*(f*x + e))*\cos(2*f*x + 2*e) - ((f*x + e)^3*a^2*d^3 + 3*(a^2*c*d^2*f^2 - a^2*d^3*e^2)*(f*x + e)^2 + 3*(a^2*c^2*d*f^2 - 2*a^2*c*d^2*f^2 + a^2*d^3*e^2)*(f*x + e))*\sin(2*f*x + 2*e))*\log(\cos(f*x + e)^2 + \sin(f*x + e)^2 + 2*\sin(f*x + e) + 1) - 2*(-I*(f*x + e)^3*a^2*d^3 + 3*(-I*a^2*c*d^2*f^2 + I*a^2*d^3*e^2)*(f*x + e)^2 + 3*(-I*a^2*c^2*d*f^2 - d*f^2 + 2*I*a^2*c*d^2*f^2 - I*a^2*d^3*e^2)*(f*x + e) + (-I*(f*x + e)^3*a^2*d^3 + 3*(-I*a^2*c*d^2*f^2 + I*a^2*d^3*e^2)*(f*x + e)^2 + 3*(-I*a^2*c^2*d*f^2 - 2*I*a^2*c*d^2*f^2 + I*a^2*d^3*e^2)*(f*x + e))*\cos(2*f*x + 2*e) + ((f*x + e)^3*a^2*d^3 + 3*(a^2*c*d^2*f^2 - a^2*d^3*e^2)*(f*x + e)^2 + 3*(a^2*c^2*d*f^2 - 2*a^2*c*d^2*f^2 + a^2*d^3*e^2)*(f*x + e))*\sin(2*f*x + 2*e))*\log(\cos(f*x + e)^2 + \sin(f*x + e)^2 - 2*\sin(f*x + e) + 1) + 24*(a^2*d^3*cos(2*f*x + 2*e) + I*a^2*d^3*sin(2*f*x + 2*e) + a^2*d^3)*\text{polylog}(4, I*e^(I*f*x + I*e)) - 24*(a^2*d^3*cos(2*f*x + 2*e) + I*a^2*d^3*sin(2*f*x + 2*e) + a^2*d^3)*\text{polylog}(4,
\end{aligned}$$

```
-I*e^(I*f*x + I*e)) - 3*(I*a^2*d^3*cos(2*f*x + 2*e) - a^2*d^3*sin(2*f*x + 2*e) + I*a^2*d^3)*polylog(3, -e^(2*I*f*x + 2*I*e)) - 24*(I*(f*x + e)*a^2*d^3 + I*a^2*c*d^2*f - I*a^2*d^3*e + (I*(f*x + e)*...
```

Fricas [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 1940 vs. 2(329) = 658.

time = 3.44, size = 1940, normalized size = 5.23

Too large to display

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)^3*(a+a*sec(f*x+e))^2,x, algorithm="fricas")
[Out] 1/4*(24*I*a^2*d^3*cos(f*x + e)*polylog(4, I*cos(f*x + e) + sin(f*x + e)) + 24*I*a^2*d^3*cos(f*x + e)*polylog(4, I*cos(f*x + e) - sin(f*x + e)) - 24*I*a^2*d^3*cos(f*x + e)*polylog(4, -I*cos(f*x + e) + sin(f*x + e)) - 24*I*a^2*d^3*cos(f*x + e)*polylog(4, -I*cos(f*x + e) - sin(f*x + e)) - 12*(I*a^2*d^3*f^2*x^2 + I*a^2*c^2*d*f^2 - I*a^2*c*d^2*f + I*(2*a^2*c*d^2*f^2 - a^2*d^3*f)*x)*cos(f*x + e)*dilog(I*cos(f*x + e) + sin(f*x + e)) - 12*(I*a^2*d^3*f^2*x^2 + I*a^2*c^2*d*f^2 + I*a^2*c*d^2*f + I*(2*a^2*c*d^2*f^2 + a^2*d^3*f)*x)*cos(f*x + e)*dilog(I*cos(f*x + e) - sin(f*x + e)) - 12*(-I*a^2*d^3*f^2*x^2 - I*a^2*c^2*d*f^2 + I*a^2*c*d^2*f - I*(2*a^2*c*d^2*f^2 - a^2*d^3*f)*x)*cos(f*x + e)*dilog(-I*cos(f*x + e) + sin(f*x + e)) - 12*(-I*a^2*d^3*f^2*x^2 - I*a^2*c^2*d*f^2 - I*a^2*c*d^2*f - I*(2*a^2*c*d^2*f^2 + a^2*d^3*f)*x)*cos(f*x + e)*dilog(-I*cos(f*x + e) - sin(f*x + e)) + 2*(2*a^2*c^3*f^3 + 3*a^2*c^2*f^2*d*f^2 - 2*a^2*d^3*e^3 + 3*(2*a^2*c*d^2*f + a^2*d^3)*e^2 - 6*(a^2*c^2*d*f^2 + a^2*c*d^2*f)*e)*cos(f*x + e)*log(cos(f*x + e) + I*sin(f*x + e) + I) - 2*(2*a^2*c^3*f^3 - 3*a^2*c^2*d*f^2 - 2*a^2*d^3*e^3 + 3*(2*a^2*c*d^2*f - a^2*d^3)*e^2 - 6*(a^2*c^2*d*f^2 - a^2*c*d^2*f)*e)*cos(f*x + e)*log(cos(f*x + e) - I*sin(f*x + e) + I) + 2*(2*a^2*d^3*f^3*x^3 + 2*a^2*d^3*e^3 + 3*(2*a^2*c*d^2*f^3 + a^2*d^3*f^2)*x^2 + 6*(a^2*c^2*d*f^3 + a^2*c*d^2*f^2)*x - 3*(2*a^2*c*d^2*f + a^2*d^3)*e^2 + 6*(a^2*c^2*d*f^2 + a^2*c*d^2*f)*e)*cos(f*x + e)*log(I*cos(f*x + e) + sin(f*x + e) + 1) - 2*(2*a^2*d^3*f^3*x^3 + 2*a^2*d^3*e^3 + 3*(2*a^2*c*d^2*f^3 - a^2*d^3*f^2)*x^2 + 6*(a^2*c^2*d*f^3 - a^2*c*d^2*f^2)*x - 3*(2*a^2*c*d^2*f - a^2*d^3)*e^2 + 6*(a^2*c^2*d*f^2 - a^2*c*d^2*f)*e)*cos(f*x + e)*log(I*cos(f*x + e) - sin(f*x + e) + 1) + 2*(2*a^2*d^3*f^3*x^3 + 2*a^2*d^3*e^3 + 3*(2*a^2*c*d^2*f^3 + a^2*d^3*f^2)*x^2 + 6*(a^2*c^2*d*f^3 + a^2*c*d^2*f^2)*x - 3*(2*a^2*c*d^2*f + a^2*d^3)*e^2 + 6*(a^2*c^2*d*f^2 + a^2*c*d^2*f)*e)*cos(f*x + e)*log(-I*cos(f*x + e) + sin(f*x + e) + 1) - 2*(2*a^2*d^3*f^3*x^3 + 2*a^2*d^3*e^3 + 3*(2*a^2*c*d^2*f^3 - a^2*d^3*f^2)*x^2 + 6*(a^2*c^2*d*f^3 - a^2*c*d^2*f^2)*x - 3*(2*a^2*c*d^2*f - a^2*d^3)*e^2 + 6*(a^2*c^2*d*f^2 - a^2*c*d^2*f)*e)*cos(f*x + e)*log(-I*cos(f*x + e) - sin(f*x + e) + 1) + 2*(2*a^2*c^3*f^3 + 3*a^2*c^2*d*f^2 - 2*a^2*d^3*e^3 + 3*(2*a^2*c*d^2*f - a^2*d^3)*e^2 - 6*(a^2*c^2*d*f^2 + a^2*c*d^2*f)*e)*cos(f*x + e)*log(-cos(f*x + e) + I*sin(f*x + e) + I) - 2*(2*a^2*c^3*f^3 - 3*a^2*c^2*d*f^2 - 2
```

```
*a^2*d^3*e^3 + 3*(2*a^2*c*d^2*f - a^2*d^3)*e^2 - 6*(a^2*c^2*d*f^2 - a^2*c*d^2*f)*e)*cos(f*x + e)*log(-cos(f*x + e) - I*sin(f*x + e) + I) - 12*(2*a^2*d^3*f*x + 2*a^2*c*d^2*f - a^2*d^3)*cos(f*x + e)*polylog(3, I*cos(f*x + e) + sin(f*x + e)) + 12*(2*a^2*d^3*f*x + 2*a^2*c*d^2*f + a^2*d^3)*cos(f*x + e)*polylog(3, I*cos(f*x + e) - sin(f*x + e)) - 12*(2*a^2*d^3*f*x + 2*a^2*c*d^2*f - a^2*d^3)*cos(f*x + e)*polylog(3, -I*cos(f*x + e) + sin(f*x + e)) + 12*(2*a^2*d^3*f*x + 2*a^2*c*d^2*f + a^2*d^3)*cos(f*x + e)*polylog(3, -I*cos(f*x + e) - sin(f*x + e)) + (a^2*d^3*f^4*x^4 + 4*a^2*c*d^2*f^4*x^3 + 6*a^2*c^2*d^2*f^4*x^2 + 4*a^2*c^3*f^4*x)*cos(f*x + e) + 4*(a^2*d^3*f^3*x^3 + 3*a^2*c*d^2*f^3*x^2 + 3*a^2*c^2*d*f^3*x + a^2*c^3*f^3)*sin(f*x + e))/(f^4*cos(f*x + e))
```

Sympy [F]

time = 0.00, size = 0, normalized size = 0.00

$$a^2 \left(\int c^3 dx + \int 2c^3 \sec(e+fx) dx + \int c^3 \sec^2(e+fx) dx + \int d^3 x^3 dx + \int 3cd^2 x^2 dx + \int 3c^2 dx dx + \int 2d^3 x^3 \sec(e+fx) dx + \int d^3 x^3 \sec^2(e+fx) dx + \int 6cd^2 x^2 \sec(e+fx) dx + \int 3cd^2 x^2 \sec^2(e+fx) dx + \int 6c^2 dx \sec(e+fx) dx + \int 3c^2 dx \sec^2(e+fx) dx \right)$$

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate((d*x+c)**3*(a+a*sec(f*x+e))**2,x)`

[Out] $a^{**2} * (\text{Integral}(c^{**3}, x) + \text{Integral}(2*c^{**3}*\sec(e + f*x), x) + \text{Integral}(c^{**3}*\sec(e + f*x)^{**2}, x) + \text{Integral}(d^{**3}*x^{**3}, x) + \text{Integral}(3*c*d^{**2}*x^{**2}, x) + \text{Integral}(3*c^{**2}*d*x, x) + \text{Integral}(2*d^{**3}*x^{**3}*\sec(e + f*x), x) + \text{Integral}(d^{**3}*x^{**3}*\sec(e + f*x)^{**2}, x) + \text{Integral}(6*c*d^{**2}*x^{**2}*\sec(e + f*x), x) + \text{Integral}(3*c*d^{**2}*x^{**2}*\sec(e + f*x)^{**2}, x) + \text{Integral}(6*c^{**2}*d*x*\sec(e + f*x), x) + \text{Integral}(3*c^{**2}*d*x*\sec(e + f*x)^{**2}, x))$

Giac [F]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate((d*x+c)^3*(a+a*sec(f*x+e))^2,x, algorithm="giac")`

[Out] `integrate((d*x + c)^3*(a*sec(f*x + e) + a)^2, x)`

Mupad [F]

time = 0.00, size = -1, normalized size = -0.00

$$\int \left(a + \frac{a}{\cos(e+fx)} \right)^2 (c+dx)^3 dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] `int((a + a/cos(e + f*x))^2*(c + d*x)^3,x)`

[Out] `int((a + a/cos(e + f*x))^2*(c + d*x)^3, x)`

$$3.7 \quad \int (c + dx)^2 (a + a \sec(e + fx))^2 dx$$

Optimal. Leaf size=262

$$-\frac{ia^2(c+dx)^2}{f} + \frac{a^2(c+dx)^3}{3d} - \frac{4ia^2(c+dx)^2 \operatorname{ArcTan}(e^{i(e+fx)})}{f} + \frac{2a^2d(c+dx) \log(1+e^{2i(e+fx)})}{f^2} + \frac{4ia^2d(c+dx)}{f^3}$$

[Out] $-I*a^2*(d*x+c)^2/f + 1/3*a^2*(d*x+c)^3/d - 4*I*a^2*(d*x+c)^2*\operatorname{arctan}(\exp(I*(f*x+e)))/f + 2*a^2*d*(d*x+c)*\ln(1+\exp(2*I*(f*x+e)))/f^2 + 4*I*a^2*d*(d*x+c)*\operatorname{polylog}(2, -I*\exp(I*(f*x+e)))/f^3 - 4*I*a^2*d*\operatorname{polylog}(2, -\exp(2*I*(f*x+e)))/f^4 - 4*a^2*d^2*\operatorname{polylog}(3, -I*\exp(I*(f*x+e)))/f^5 + 4*a^2*d^2*\operatorname{polylog}(3, I*\exp(I*(f*x+e)))/f^6 + a^2*(d*x+c)^2*\tan(f*x+e)/f$

Rubi [A]

time = 0.22, antiderivative size = 262, normalized size of antiderivative = 1.00, number of steps used = 14, number of rules used = 10, integrand size = 20, $\frac{\text{number of rules}}{\text{integrand size}} = 0.500$, Rules used = {4275, 4266, 2611, 2320, 6724, 4269, 3800, 2221, 2317, 2438}

$$-\frac{4ia^2(c+dx)^2 \operatorname{ArcTan}(e^{i(e+fx)})}{f} + \frac{4ia^2d(c+dx)\operatorname{Li}_2(-ie^{i(e+fx)})}{f^2} - \frac{4ia^2d(c+dx)\operatorname{Li}_2(ie^{i(e+fx)})}{f^2} + \frac{2a^2d(c+dx) \log(1+e^{2i(e+fx)})}{f^2} + \frac{a^2(c+dx)^2 \tan(e+fx)}{f} - \frac{ia^2(c+dx)^2}{f} + \frac{a^2(c+dx)^3}{3d} - \frac{ia^2d^2\operatorname{Li}_2(-ie^{2i(e+fx)})}{f^3} - \frac{4a^2d^2\operatorname{Li}_3(-ie^{i(e+fx)})}{f^3} + \frac{4a^2d^2\operatorname{Li}_3(ie^{i(e+fx)})}{f^3}$$

Antiderivative was successfully verified.

[In] $\operatorname{Int}[(c + d*x)^2*(a + a*\operatorname{Sec}[e + f*x])^2, x]$

[Out] $((-I)*a^2*(c + d*x)^2)/f + (a^2*(c + d*x)^3)/(3*d) - ((4*I)*a^2*(c + d*x)^2*\operatorname{ArcTan}[E^((I*(e + f*x)))]/f + (2*a^2*d*(c + d*x)*\operatorname{Log}[1 + E^((2*I)*(e + f*x))])/f^2 + ((4*I)*a^2*d*(c + d*x)*\operatorname{PolyLog}[2, (-I)*E^((I*(e + f*x)))]/f^2 - ((4*I)*a^2*d*(c + d*x)*\operatorname{PolyLog}[2, I*E^((I*(e + f*x)))]/f^2 - (I*a^2*d^2*\operatorname{PolyLog}[2, -E^((2*I)*(e + f*x))])/f^3 - (4*a^2*d^2*\operatorname{PolyLog}[3, (-I)*E^((I*(e + f*x)))]/f^3 + (4*a^2*d^2*\operatorname{PolyLog}[3, I*E^((I*(e + f*x)))]/f^3 + (a^2*(c + d*x)^2*\operatorname{Tan}[e + f*x])/f$

Rule 2221

$\operatorname{Int}[((F_*)^((g_*)*((e_*) + (f_*)*(x_))))^{(n_*)}*((c_*) + (d_*)*(x_))^{(m_*)}/((a_) + (b_*)*((F_*)^((g_*)*((e_*) + (f_*)*(x_))))^{(n_*)}), x_{\text{Symbol}}] \Rightarrow \operatorname{Simp}[((c + d*x)^m/(b*f*g*n*\operatorname{Log}[F]))*\operatorname{Log}[1 + b*((F^((g*(e + f*x)))^n/a)], x] - \operatorname{Dist}[d*(m/(b*f*g*n*\operatorname{Log}[F])), \operatorname{Int}[(c + d*x)^{(m - 1)}*\operatorname{Log}[1 + b*((F^((g*(e + f*x)))^n/a)], x], x]; \operatorname{FreeQ}[\{F, a, b, c, d, e, f, g, n\}, x] \& \operatorname{IGtQ}[m, 0]$

Rule 2317

$\operatorname{Int}[\operatorname{Log}[(a_*) + (b_*)*((F_*)^((e_*)*((c_*) + (d_*)*(x_))))^{(n_*)}], x_{\text{Symbol}}] \Rightarrow \operatorname{Dist}[1/(d*e*n*\operatorname{Log}[F]), \operatorname{Subst}[\operatorname{Int}[\operatorname{Log}[a + b*x]/x, x], x, (F^((e*(c + d*x)))^n)], x]; \operatorname{FreeQ}[\{F, a, b, c, d, e, n\}, x] \& \operatorname{GtQ}[a, 0]$

Rule 2320

```
Int[u_, x_Symbol] :> With[{v = FunctionOfExponential[u, x]}, Dist[v/D[v, x], Subst[Int[FunctionOfExponentialFunction[u, x]/x, x], x, v], x]] /; FunctionOfExponentialQ[u, x] && !MatchQ[u, (w_)*(a_.)*(v_)^(n_.))^(m_.)] /; FreeQ[{a, m, n}, x] && IntegerQ[m*n] && !MatchQ[u, E^((c_.)*(a_.) + (b_.)*x))*(F_)[v_]] /; FreeQ[{a, b, c}, x] && InverseFunctionQ[F[x]]]
```

Rule 2438

```
Int[Log[(c_.)*(d_.) + (e_.)*(x_)^(n_.))]/(x_), x_Symbol] :> Simp[-PolyLog[2, (-c)*e*x^n]/n, x] /; FreeQ[{c, d, e, n}, x] && EqQ[c*d, 1]
```

Rule 2611

```
Int[Log[1 + (e_.)*((F_)^((c_.)*(a_.) + (b_.)*(x_))))^(n_.)]*((f_.) + (g_.)*(x_)^(m_.), x_Symbol] :> Simp[((-f + g*x)^m)*(PolyLog[2, (-e)*(F^(c*(a + b*x)))^n]/(b*c*n*Log[F])), x] + Dist[g*(m/(b*c*n*Log[F])), Int[(f + g*x)^(m - 1)*PolyLog[2, (-e)*(F^(c*(a + b*x)))^n], x], x] /; FreeQ[{F, a, b, c, e, f, g, n}, x] && GtQ[m, 0]
```

Rule 3800

```
Int[((c_.) + (d_.)*(x_))^(m_.)*tan[(e_.) + (f_.)*(x_)], x_Symbol] :> Simp[I*((c + d*x)^(m + 1)/(d*(m + 1))), x] - Dist[2*I, Int[(c + d*x)^m*(E^(2*I*(e + f*x))/(1 + E^(2*I*(e + f*x)))), x], x] /; FreeQ[{c, d, e, f}, x] && IGtQ[m, 0]
```

Rule 4266

```
Int[csc[(e_.) + Pi*(k_.) + (f_.)*(x_)]*((c_.) + (d_.)*(x_))^(m_.), x_Symbol] :> Simp[-2*(c + d*x)^m*(ArcTanh[E^(I*k*Pi)*E^(I*(e + f*x))]/f), x] + (-Dist[d*(m/f), Int[(c + d*x)^(m - 1)*Log[1 - E^(I*k*Pi)*E^(I*(e + f*x))], x], x] + Dist[d*(m/f), Int[(c + d*x)^(m - 1)*Log[1 + E^(I*k*Pi)*E^(I*(e + f*x))], x], x]) /; FreeQ[{c, d, e, f}, x] && IntegerQ[2*k] && IGtQ[m, 0]
```

Rule 4269

```
Int[csc[(e_.) + (f_.)*(x_)]^2*((c_.) + (d_.)*(x_))^(m_.), x_Symbol] :> Simp[((-c + d*x)^m)*(Cot[e + f*x]/f), x] + Dist[d*(m/f), Int[(c + d*x)^(m - 1)*Cot[e + f*x], x], x] /; FreeQ[{c, d, e, f}, x] && GtQ[m, 0]
```

Rule 4275

```
Int[(csc[(e_.) + (f_.)*(x_)]*(b_.) + (a_.))^(n_.)*((c_.) + (d_.)*(x_))^(m_.), x_Symbol] :> Int[ExpandIntegrand[(c + d*x)^m, (a + b*Csc[e + f*x])^n, x],
```

```
x] /; FreeQ[{a, b, c, d, e, f, m}, x] && IGtQ[m, 0] && IGtQ[n, 0]
```

Rule 6724

```
Int[PolyLog[n_, (c_.)*(a_) + (b_)*(x_)]^p]/((d_.) + (e_.)*(x_)), x_Symbol] :> Simp[PolyLog[n + 1, c*(a + b*x)^p]/(e*p), x] /; FreeQ[{a, b, c, d, e, n, p}, x] && EqQ[b*d, a*e]
```

Rubi steps

$$\begin{aligned}
\int (c+dx)^2(a+a \sec(e+fx))^2 dx &= \int (a^2(c+dx)^2 + 2a^2(c+dx)^2 \sec(e+fx) + a^2(c+dx)^2 \sec^2(e+fx)) \\
&= \frac{a^2(c+dx)^3}{3d} + a^2 \int (c+dx)^2 \sec^2(e+fx) dx + (2a^2) \int (c+dx)^2 \sec(e+fx) dx \\
&= \frac{a^2(c+dx)^3}{3d} - \frac{4ia^2(c+dx)^2 \tan^{-1}(e^{i(e+fx)})}{f} + \frac{a^2(c+dx)^2 \tan(e+fx)}{f} \\
&= -\frac{ia^2(c+dx)^2}{f} + \frac{a^2(c+dx)^3}{3d} - \frac{4ia^2(c+dx)^2 \tan^{-1}(e^{i(e+fx)})}{f} + \frac{4ia^2d(c+dx)}{f} \\
&= -\frac{ia^2(c+dx)^2}{f} + \frac{a^2(c+dx)^3}{3d} - \frac{4ia^2(c+dx)^2 \tan^{-1}(e^{i(e+fx)})}{f} + \frac{2a^2d(c+dx)}{f} \\
&= -\frac{ia^2(c+dx)^2}{f} + \frac{a^2(c+dx)^3}{3d} - \frac{4ia^2(c+dx)^2 \tan^{-1}(e^{i(e+fx)})}{f} + \frac{2a^2d(c+dx)}{f} \\
&= -\frac{ia^2(c+dx)^2}{f} + \frac{a^2(c+dx)^3}{3d} - \frac{4ia^2(c+dx)^2 \tan^{-1}(e^{i(e+fx)})}{f} + \frac{2a^2d(c+dx)}{f}
\end{aligned}$$

Mathematica [A]

time = 5.71, size = 505, normalized size = 1.93

$\frac{\frac{1}{2} d^2 (1 + \cos(e + f x))^2 \left(\frac{1}{2} e^2 + e x + \frac{1}{2} f^2 x^2 + f e x^2\right) \left(\frac{1}{2} \left(\frac{1}{2} e^2 + e x + f^2 x^2 + f e x^2\right)^2 + \frac{1}{2} \left(\frac{1}{2} e^2 + e x + f^2 x^2 + f e x^2\right) \left(\frac{1}{2} e^2 + e x + f^2 x^2 + f e x^2\right) \left(\frac{1}{2} e^2 + e x + f^2 x^2 + f e x^2\right) \left(\frac{1}{2} e^2 + e x + f^2 x^2 + f e x^2\right)\right)}{f^3 \left(\frac{1}{2} e^2 + e x + f^2 x^2 + f e x^2\right)^2}$

Warning: Unable to verify antiderivative.

```
[In] Integrate[(c + d*x)^2*(a + a*Sec[e + f*x])^2, x]
```

```
[Out]  $(a^2(1 + \cos(e + f x))^2 \sec^2((e + f x)/2) + (3(c + d x)^2 \sin^2((f x)/2)))/(f (\cos(e/2) - \sin(e/2)) \cos((e + f x)/2) - \sin((e + f x)/2)) + ((3(c + d x)^2 \sin^2((f x)/2)))/(f (\cos(e/2) + \sin(e/2)) \cos((e + f x)/2) + \sin((e + f x)/2)) - ((3 I) (2 c d f^2 x^2 + d^2 f^2 x^2 + 4 c^2 f^2 x^2) \operatorname{ArcTan}[\cos(e + f x) + I \sin(e + f x)] + 8 c d f^2 x^2 \operatorname{ArcTan}[\cos(e + f x) + I \sin(e + f x)] + 4 d^2 f^2 x^2 \operatorname{ArcTan}[\cos(e + f x) + I \sin(e + f x)])$ 
```

$$\begin{aligned}
& + f*x]] + (2*I)*c*d*f*Log[1 + Cos[2*(e + f*x)] + I*Sin[2*(e + f*x)]] + (2*I) \\
&)*d^2*f*x*Log[1 + Cos[2*(e + f*x)] + I*Sin[2*(e + f*x)]] + 4*d*f*(c + d*x)* \\
& PolyLog[2, I*Cos[e + f*x] - Sin[e + f*x]] - 4*d*f*(c + d*x)*PolyLog[2, (-I) \\
& *Cos[e + f*x] + Sin[e + f*x]] + d^2*PolyLog[2, -Cos[2*(e + f*x)] - I*Sin[2* \\
& (e + f*x)]] + (4*I)*d^2*PolyLog[3, I*Cos[e + f*x] - Sin[e + f*x]] - (4*I)*d \\
& ^2*PolyLog[3, (-I)*Cos[e + f*x] + Sin[e + f*x]] + (2*I)*c*d*f^2*x*Tan[e] + \\
& I*d^2*f^2*x^2*Tan[e]))/f^3))/12
\end{aligned}$$

Maple [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 678 vs. $2(237) = 474$.

time = 0.87, size = 679, normalized size = 2.59

method	result
risch	$ \frac{8ia^2cde \arctan(e^{i(fx+e)})}{f^2} + \frac{4ia^2d^2 \operatorname{polylog}(2, -ie^{i(fx+e)})x}{f^2} - \frac{2a^2d^2 \ln(1+ie^{i(fx+e)})x^2}{f} + \frac{2a^2d^2 \ln(1-ie^{i(fx+e)})x^2}{f} + \frac{2a^2e^2d^2}{f} $

Verification of antiderivative is not currently implemented for this CAS.

```
[In] int((d*x+c)^2*(a+a*sec(f*x+e))^2,x,method=_RETURNVERBOSE)

[Out] 8*I/f^2*a^2*c*d*e*arctan(exp(I*(f*x+e)))+2*I*a^2*(d^2*x^2+2*c*d*x+c^2)/f/(e
xp(2*I*(f*x+e))+1)+2/f^2*a^2*c*d*ln(exp(2*I*(f*x+e))+1)-4/f^2*a^2*c*d*ln(ex
p(I*(f*x+e)))-2/f*a^2*d^2*ln(1+I*exp(I*(f*x+e)))*x^2+2/f*a^2*d^2*ln(1-I*exp
(I*(f*x+e)))*x^2+2/f^3*a^2*e^2*d^2*ln(1+I*exp(I*(f*x+e)))-2*I/f*a^2*d^2*x^2
-2*I/f^3*a^2*e^2*d^2-4/f^2*a^2*c*d*ln(1+I*exp(I*(f*x+e)))*e-4/f*a^2*c*d*ln(
1+I*exp(I*(f*x+e)))*x+4/f*a^2*c*d*ln(1-I*exp(I*(f*x+e)))*x+4/f^2*a^2*c*d*ln(
1-I*exp(I*(f*x+e)))*e-4*I/f*a^2*c^2*arctan(exp(I*(f*x+e)))+4/f^3*a^2*d^2*e
*ln(exp(I*(f*x+e)))+2/f^2*a^2*d^2*ln(exp(2*I*(f*x+e))+1)*x-2/f^3*a^2*e^2*d^
2*ln(1-I*exp(I*(f*x+e)))+4*I/f^2*a^2*d^2*polylog(2,-I*exp(I*(f*x+e)))*x-4*I
/f^2*a^2*d^2*polylog(2,I*exp(I*(f*x+e)))*x-4*I/f^2*a^2*c*d*polylog(2,I*exp(
I*(f*x+e)))+4*I/f^2*a^2*c*d*polylog(2,-I*exp(I*(f*x+e)))-4*I/f^2*a^2*d^2*e*
x-4*I/f^3*a^2*d^2*e^2*arctan(exp(I*(f*x+e)))-I*a^2*d^2*polylog(2,-exp(2*I*(f*x+e)))/f^3+1/3*a^2*d^2*x^3-4*a^2*d^2*polylog(3,-I*exp(I*(f*x+e)))/f^3+4*a
^2*d^2*polylog(3,I*exp(I*(f*x+e)))/f^3+1/3*a^2/d*c^3+a^2*d*c*x^2+a^2*c^2*x
```

Maxima [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 1829 vs. $2(233) = 466$.

time = 0.69, size = 1829, normalized size = 6.98

Too large to display

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)^2*(a+a*sec(f*x+e))^2,x, algorithm="maxima")

[Out] 1/3*(3*(f*x + e)*a^2*c^2 + (f*x + e)^3*a^2*d^2/f^2 + 3*(f*x + e)^2*a^2*c*d/
f - 3*(f*x + e)^2*a^2*d^2*e/f^2 - 6*(f*x + e)*a^2*c*d*e/f + 6*a^2*c^2*log(s
ec(f*x + e) + tan(f*x + e)) - 12*a^2*c*d*e*log(sec(f*x + e) + tan(f*x + e))
```

```

/f + 3*(f*x + e)*a^2*d^2*e^2/f^2 + 6*a^2*d^2*2*log(sec(f*x + e) + tan(f*x
+ e))/f^2 + 3*(2*a^2*c^2*f^2 - 4*a^2*c*d*f*e + 2*a^2*d^2*e^2 - 2*((f*x + e)
^2*a^2*d^2 + 2*(a^2*c*d*f - a^2*d^2*e)*(f*x + e) + ((f*x + e)^2*a^2*d^2 +
2*(a^2*c*d*f - a^2*d^2*e)*(f*x + e)))*cos(2*f*x + 2*e) + (I*(f*x + e)^2*a^2*
d^2 + 2*(I*a^2*c*d*f - I*a^2*d^2*e)*(f*x + e))*sin(2*f*x + 2*e))*arctan2(co
s(f*x + e), sin(f*x + e) + 1) - 2*((f*x + e)^2*a^2*d^2 + 2*(a^2*c*d*f - a^2*
d^2*e)*(f*x + e) + ((f*x + e)^2*a^2*d^2 + 2*(a^2*c*d*f - a^2*d^2*e)*(f*x +
e)))*cos(2*f*x + 2*e) + (I*(f*x + e)^2*a^2*d^2 + 2*(I*a^2*c*d*f - I*a^2*d^2*
e)*(f*x + e))*sin(2*f*x + 2*e))*arctan2(cos(f*x + e), -sin(f*x + e) + 1) +
2*((f*x + e)*a^2*d^2 + a^2*c*d*f - a^2*d^2*e + ((f*x + e)*a^2*d^2 + a^2*c*
d*f - a^2*d^2*e)*cos(2*f*x + 2*e) - (-I*(f*x + e)*a^2*d^2 - I*a^2*c*d*f + I
*a^2*d^2*e)*sin(2*f*x + 2*e))*arctan2(sin(2*f*x + 2*e), cos(2*f*x + 2*e) +
1) - 2*((f*x + e)^2*a^2*d^2 + 2*(a^2*c*d*f - a^2*d^2*e)*(f*x + e))*cos(2*f*
x + 2*e) - (a^2*d^2*cos(2*f*x + 2*e) + I*a^2*d^2*sin(2*f*x + 2*e) + a^2*d^2*
)*dilog(-e^(2*I*f*x + 2*I*e)) - 4*((f*x + e)*a^2*d^2 + a^2*c*d*f - a^2*d^2*
e + ((f*x + e)*a^2*d^2 + a^2*c*d*f - a^2*d^2*e)*cos(2*f*x + 2*e) + (I*(f*x
+ e)*a^2*d^2 + I*a^2*c*d*f - I*a^2*d^2*e)*sin(2*f*x + 2*e))*dilog(I*e^(I*f*
x + I*e)) + 4*((f*x + e)*a^2*d^2 + a^2*c*d*f - a^2*d^2*e + ((f*x + e)*a^2*d
^2 + a^2*c*d*f - a^2*d^2*e)*cos(2*f*x + 2*e) - (-I*(f*x + e)*a^2*d^2 - I*a^
2*c*d*f + I*a^2*d^2*e)*sin(2*f*x + 2*e))*dilog(-I*e^(I*f*x + I*e)) + (-I*(f
*x + e)*a^2*d^2 - I*a^2*c*d*f + I*a^2*d^2*e + (-I*(f*x + e)*a^2*d^2 - I*a^2*
c*d*f + I*a^2*d^2*e)*cos(2*f*x + 2*e) + ((f*x + e)*a^2*d^2 + a^2*c*d*f - a
^2*d^2*e)*sin(2*f*x + 2*e))*log(cos(2*f*x + 2*e)^2 + sin(2*f*x + 2*e)^2 + 2
*cos(2*f*x + 2*e) + 1) + (-I*(f*x + e)^2*a^2*d^2 - 2*(I*a^2*c*d*f - I*a^2*d^
2*e)*(f*x + e) + (-I*(f*x + e)^2*a^2*d^2 - 2*(I*a^2*c*d*f - I*a^2*d^2*e)*(f
*x + e))*cos(2*f*x + 2*e) + ((f*x + e)^2*a^2*d^2 + 2*(a^2*c*d*f - a^2*d^2*
e)*(f*x + e))*sin(2*f*x + 2*e))*log(cos(f*x + e)^2 + sin(f*x + e)^2 + 2*sin
(f*x + e) + 1) + (I*(f*x + e)^2*a^2*d^2 - 2*(-I*a^2*c*d*f + I*a^2*d^2*e)*(f
*x + e) + (I*(f*x + e)^2*a^2*d^2 - 2*(-I*a^2*c*d*f + I*a^2*d^2*e)*(f*x + e)
)*cos(2*f*x + 2*e) - ((f*x + e)^2*a^2*d^2 + 2*(a^2*c*d*f - a^2*d^2*e)*(f*x
+ e))*sin(2*f*x + 2*e))*log(cos(f*x + e)^2 + sin(f*x + e)^2 - 2*sin(f*x + e
) + 1) - 4*(I*a^2*d^2*cos(2*f*x + 2*e) - a^2*d^2*sin(2*f*x + 2*e) + I*a^2*d^
2)*polylog(3, I*e^(I*f*x + I*e)) - 4*(-I*a^2*d^2*cos(2*f*x + 2*e) + a^2*d^
2*sin(2*f*x + 2*e) - I*a^2*d^2)*polylog(3, -I*e^(I*f*x + I*e)) - 2*(I*(f*x
+ e)^2*a^2*d^2 + 2*(I*a^2*c*d*f - I*a^2*d^2*e)*(f*x + e))*sin(2*f*x + 2*e))
/(-I*f^2*cos(2*f*x + 2*e) + f^2*sin(2*f*x + 2*e) - I*f^2)/f

```

Fricas [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 1151 vs. 2(233) = 466.

time = 3.41, size = 1151, normalized size = 4.39

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate((d*x+c)^2*(a+a*sec(f*x+e))^2,x, algorithm="fricas")`

```
[Out] -1/3*(6*a^2*d^2*cos(f*x + e)*polylog(3, I*cos(f*x + e) + sin(f*x + e)) - 6*a^2*d^2*cos(f*x + e)*polylog(3, I*cos(f*x + e) - sin(f*x + e)) + 6*a^2*d^2*cos(f*x + e)*polylog(3, -I*cos(f*x + e) + sin(f*x + e)) - 6*a^2*d^2*cos(f*x + e)*polylog(3, -I*cos(f*x + e) - sin(f*x + e)) + 3*(2*I*a^2*d^2*f*x + 2*I*a^2*c*d*f - I*a^2*d^2)*cos(f*x + e)*dilog(I*cos(f*x + e) + sin(f*x + e)) + 3*(2*I*a^2*d^2*f*x + 2*I*a^2*c*d*f + I*a^2*d^2)*cos(f*x + e)*dilog(I*cos(f*x + e) - sin(f*x + e)) + 3*(-2*I*a^2*d^2*f*x - 2*I*a^2*c*d*f + I*a^2*d^2)*cos(f*x + e)*dilog(-I*cos(f*x + e) + sin(f*x + e)) + 3*(-2*I*a^2*d^2*f*x - 2*I*a^2*c*d*f - I*a^2*d^2)*cos(f*x + e)*dilog(-I*cos(f*x + e) - sin(f*x + e)) - 3*(a^2*c^2*f^2 + a^2*c*d*f + a^2*d^2*e^2 - (2*a^2*c*d*f + a^2*d^2)*e)*cos(f*x + e)*log(cos(f*x + e) + I*sin(f*x + e) + I) + 3*(a^2*c^2*f^2 - a^2*c*d*f + a^2*d^2*e^2 - (2*a^2*c*d*f - a^2*d^2)*e)*cos(f*x + e)*log(cos(f*x + e) - I*sin(f*x + e) + I) - 3*(a^2*d^2*f^2*x^2 - a^2*d^2*e^2 + (2*a^2*c*d*f^2 + a^2*d^2*f)*x + (2*a^2*c*d*f + a^2*d^2)*e)*cos(f*x + e)*log(I*cos(f*x + e) + sin(f*x + e) + 1) + 3*(a^2*d^2*f^2*x^2 - a^2*d^2*e^2 + (2*a^2*c*d*f^2 - a^2*d^2*f)*x + (2*a^2*c*d*f - a^2*d^2)*e)*cos(f*x + e)*log(I*cos(f*x + e) - sin(f*x + e) + 1) - 3*(a^2*d^2*f^2*x^2 - a^2*d^2*e^2 + (2*a^2*c*d*f^2 + a^2*d^2*f)*x + (2*a^2*c*d*f + a^2*d^2)*e)*cos(f*x + e)*log(-I*cos(f*x + e) + sin(f*x + e) + 1) + 3*(a^2*d^2*f^2*x^2 - a^2*d^2*e^2 + (2*a^2*c*d*f^2 - a^2*d^2*f)*x + (2*a^2*c*d*f - a^2*d^2)*e)*cos(f*x + e)*log(-I*cos(f*x + e) - sin(f*x + e) + 1) - 3*(a^2*c^2*f^2 + a^2*c*d*f + a^2*d^2*e^2 - (2*a^2*c*d*f + a^2*d^2)*e)*cos(f*x + e)*log(-cos(f*x + e) + I*sin(f*x + e) + I) + 3*(a^2*c^2*f^2 - a^2*c*d*f + a^2*d^2*e^2 - (2*a^2*c*d*f - a^2*d^2)*e)*cos(f*x + e)*log(-cos(f*x + e) - I*sin(f*x + e) + I) - (a^2*d^2*f^3*x^3 + 3*a^2*c*d*f^3*x^2 + 3*a^2*c^2*f^3*x)*cos(f*x + e) - 3*(a^2*d^2*f^2*x^2 + 2*a^2*c*d*f^2*x + a^2*c^2*f^2)*sin(f*x + e))/(f^3*cos(f*x + e))
```

Sympy [F]

time = 0.00, size = 0, normalized size = 0.00

$$a^2 \left(\int c^2 dx + \int 2c^2 \sec(e + fx) dx + \int c^2 \sec^2(e + fx) dx + \int d^2 x^2 dx + \int 2d^2 x^2 \sec(e + fx) dx + \int d^2 x^2 \sec^2(e + fx) dx + \int 4cdx \sec(e + fx) dx + \int 2cdx \sec^2(e + fx) dx \right)$$

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)**2*(a+a*sec(f*x+e))**2,x)
```

```
[Out] a**2*(Integral(c**2, x) + Integral(2*c**2*sec(e + fx), x) + Integral(c**2*sec(e + fx)**2, x) + Integral(d**2*x**2, x) + Integral(2*c*d*x, x) + Integral(2*d**2*x**2*sec(e + fx), x) + Integral(d**2*x**2*sec(e + fx)**2, x) + Integral(4*c*d*x*sec(e + fx), x) + Integral(2*c*d*x*sec(e + fx)**2, x))
```

Giac [F]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate((d*x+c)^2*(a+a*sec(f*x+e))^2,x, algorithm="giac")`

[Out] `integrate((d*x + c)^2*(a*sec(f*x + e) + a)^2, x)`

Mupad [F]

time = 0.00, size = -1, normalized size = -0.00

$$\int \left(a + \frac{a}{\cos(e + f x)} \right)^2 (c + d x)^2 dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] `int((a + a/cos(e + f*x))^2*(c + d*x)^2,x)`

[Out] `int((a + a/cos(e + f*x))^2*(c + d*x)^2, x)`

$$3.8 \quad \int (c + dx)(a + a \sec(e + fx))^2 dx$$

Optimal. Leaf size=134

$$\frac{a^2(c + dx)^2}{2d} - \frac{4ia^2(c + dx)\text{ArcTan}(e^{i(e+fx)})}{f} + \frac{a^2d\log(\cos(e + fx))}{f^2} + \frac{2ia^2d\text{PolyLog}(2, -ie^{i(e+fx)})}{f^2} - \frac{2ia^2d\text{PolyLog}(2, ie^{i(e+fx)})}{f^2}$$

[Out] $\frac{1}{2}a^2(d*x+c)^2/d - 4*I*a^2*(d*x+c)*\arctan(\exp(I*(f*x+e)))/f + a^2*d*\ln(\cos(f*x+e))/f^2 + 2*I*a^2*d*\text{polylog}(2, -I*\exp(I*(f*x+e)))/f^2 - 2*I*a^2*d*\text{polylog}(2, I*\exp(I*(f*x+e)))/f^2 + a^2*(d*x+c)*\tan(f*x+e)/f$

Rubi [A]

time = 0.09, antiderivative size = 134, normalized size of antiderivative = 1.00, number of steps used = 9, number of rules used = 6, integrand size = 18, $\frac{\text{number of rules}}{\text{integrand size}} = 0.333$, Rules used = {4275, 4266, 2317, 2438, 4269, 3556}

$$-\frac{4ia^2(c + dx)\text{ArcTan}(e^{i(e+fx)})}{f} + \frac{a^2(c + dx)\tan(e + fx)}{f} + \frac{a^2(c + dx)^2}{2d} + \frac{2ia^2d\text{Li}_2(-ie^{i(e+fx)})}{f^2} - \frac{2ia^2d\text{Li}_2(ie^{i(e+fx)})}{f^2} + \frac{a^2d\log(\cos(e + fx))}{f^2}$$

Antiderivative was successfully verified.

[In] $\text{Int}[(c + d*x)*(a + a*\text{Sec}[e + f*x])^2, x]$

[Out] $(a^2*(c + d*x)^2)/(2*d) - ((4*I)*a^2*(c + d*x)*\text{ArcTan}[E^{(I*(e + f*x))}])/f + (a^2*d*\log[\cos[e + f*x]])/f^2 + ((2*I)*a^2*d*\text{PolyLog}[2, (-I)*E^{(I*(e + f*x))}])/f^2 - ((2*I)*a^2*d*\text{PolyLog}[2, I*E^{(I*(e + f*x))}])/f^2 + (a^2*(c + d*x)*\tan[e + f*x])/f$

Rule 2317

$\text{Int}[\text{Log}[(a_) + (b_)*((F_)^((e_.)*(c_.) + (d_.)*(x_.)))^(n_.)], x_Symbol] :> \text{Dist}[1/(d*e*n*\text{Log}[F]), \text{Subst}[\text{Int}[\text{Log}[a + b*x]/x, x], x, (F^(e*(c + d*x)))^n], x] /; \text{FreeQ}[\{F, a, b, c, d, e, n\}, x] \&& \text{GtQ}[a, 0]$

Rule 2438

$\text{Int}[\text{Log}[(c_.)*(d_.) + (e_.)*(x_.)^(n_.)]/(x_), x_Symbol] :> \text{Simp}[-\text{PolyLog}[2, (-c)*e*x^n]/n, x] /; \text{FreeQ}[\{c, d, e, n\}, x] \&& \text{EqQ}[c*d, 1]$

Rule 3556

$\text{Int}[\tan[(c_.) + (d_.)*(x_.)], x_Symbol] :> \text{Simp}[-\text{Log}[\text{RemoveContent}[\cos[c + d*x], x]]/d, x] /; \text{FreeQ}[\{c, d\}, x]$

Rule 4266

$\text{Int}[\csc[(e_.) + \text{Pi}*(k_.) + (f_.)*(x_.)]*((c_.) + (d_.)*(x_.))^(m_.), x_Symbol] :> \text{Simp}[-2*(c + d*x)^m*(\text{ArcTanh}[E^{(I*k*\text{Pi})}*E^{(I*(e + f*x))}]/f), x] + (-\text{Di}$

```
st[d*(m/f), Int[(c + d*x)^(m - 1)*Log[1 - E^(I*k*Pi)*E^(I*(e + f*x))], x], x] + Dist[d*(m/f), Int[(c + d*x)^(m - 1)*Log[1 + E^(I*k*Pi)*E^(I*(e + f*x))], x], x]) /; FreeQ[{c, d, e, f}, x] && IntegerQ[2*k] && IGtQ[m, 0]
```

Rule 4269

```
Int[csc[(e_.) + (f_.)*(x_)]^2*((c_.) + (d_.)*(x_))^(m_), x_Symbol] :> Simplify[(-(c + d*x)^m)*(Cot[e + f*x]/f), x] + Dist[d*(m/f), Int[(c + d*x)^(m - 1)*Cot[e + f*x], x], x] /; FreeQ[{c, d, e, f}, x] && GtQ[m, 0]
```

Rule 4275

```
Int[(csc[(e_.) + (f_.)*(x_)]*(b_.) + (a_.))^(n_)*((c_.) + (d_.)*(x_))^(m_), x_Symbol] :> Int[ExpandIntegrand[(c + d*x)^m, (a + b*Csc[e + f*x])^n, x], x] /; FreeQ[{a, b, c, d, e, f, m}, x] && IGtQ[m, 0] && IGtQ[n, 0]
```

Rubi steps

$$\begin{aligned} \int (c + dx)(a + a \sec(e + fx))^2 dx &= \int (a^2(c + dx) + 2a^2(c + dx) \sec(e + fx) + a^2(c + dx) \sec^2(e + fx)) dx \\ &= \frac{a^2(c + dx)^2}{2d} + a^2 \int (c + dx) \sec^2(e + fx) dx + (2a^2) \int (c + dx) \sec(e + fx) dx \\ &= \frac{a^2(c + dx)^2}{2d} - \frac{4ia^2(c + dx) \tan^{-1}(e^{i(e+fx)})}{f} + \frac{a^2(c + dx) \tan(e + fx)}{f} \\ &= \frac{a^2(c + dx)^2}{2d} - \frac{4ia^2(c + dx) \tan^{-1}(e^{i(e+fx)})}{f} + \frac{a^2 d \log(\cos(e + fx))}{f^2} + \frac{a^2 d \log(\sin(e + fx))}{f^2} \\ &= \frac{a^2(c + dx)^2}{2d} - \frac{4ia^2(c + dx) \tan^{-1}(e^{i(e+fx)})}{f} + \frac{a^2 d \log(\cos(e + fx))}{f^2} + \frac{2a^2 d \log(\sin(e + fx))}{f^2} \end{aligned}$$

Mathematica [B] Both result and optimal contain complex but leaf count is larger than twice the leaf count of optimal. 330 vs. $2(134) = 268$.
time = 5.57, size = 330, normalized size = 2.46

$$a^2(1 + \cos(e + fx))^2 \sec^2(\frac{1}{2}(e + fx)) \left(8c f \tanh^{-1}(\sin(e) + \cos(e) \tan(\frac{f x}{2})) + 8d \text{ArcTan}[\cot(e)] \tanh^{-1}(\sin(e) + \cos(e) \tan(\frac{f x}{2})) - \frac{4i \cos(e) ((e - \text{ArcTan}[\cot(e)]) (\ln(1 - \sin(e) \text{ArcTan}[\cot(e)])) - \ln(\sin(e) \text{ArcTan}[\cot(e)])) + 4 \text{PolyLog}[2, -e^{i(e+fx)}, -\text{ArcTan}[\cot(e)]] - 4 \text{PolyLog}[2, e^{i(e+fx)}, -\text{ArcTan}[\cot(e)]] + \frac{4 i (e - \text{ArcTan}[\cot(e)])}{\sqrt{\sin(e)^2}} + \frac{4 i (e - \text{ArcTan}[\cot(e)]) \ln(1 + \tan(e)^2)}{\sin(e)^2} + \frac{4 i (e - \text{ArcTan}[\cot(e)]) \ln(1 + \tan(e)^2) \tan(e)^2}{\sin(e)^4} - 2 d f \tan(e) + f x (2 e f + d f x + 2 d \tan(e)) + 2 d \ln(\cos(e + fx)) + f x \tan(e))\right)$$

Warning: Unable to verify antiderivative.

```
[In] Integrate[(c + d*x)*(a + a*Sec[e + f*x])^2, x]
[Out] (a^2*(1 + Cos[e + f*x])^2*Sec[(e + f*x)/2]^4*(8*c*f*ArcTanh[Sin[e] + Cos[e]*Tan[(f*x)/2]] + 8*d*ArcTan[Cot[e]]*ArcTanh[Sin[e] + Cos[e]*Tan[(f*x)/2]] - (4*d*Csc[e]*((f*x - ArcTan[Cot[e]])*Log[1 - E^(I*(f*x - ArcTan[Cot[e]]))]))
```

$$\begin{aligned}
& -\text{Log}[1 + E^{\text{I}}(f*x - \text{ArcTan}[\cot[e]]))] + \text{I}*\text{PolyLog}[2, -E^{\text{I}}(f*x - \text{ArcTan}[\cot[e]]))] - \text{I}*\text{PolyLog}[2, E^{\text{I}}(f*x - \text{ArcTan}[\cot[e]]))]/\text{Sqrt}[\csc[e]^2] \\
& + (2*f*(c + d*x)*\sin[(f*x)/2])/((\cos[e/2] - \sin[e/2])*(\cos[(e + f*x)/2] - \sin[(e + f*x)/2])) + (2*f*(c + d*x)*\sin[(f*x)/2])/((\cos[e/2] + \sin[e/2])*(\cos[(e + f*x)/2] + \sin[(e + f*x)/2])) - 2*d*f*x*\tan[e] + f*x*(2*c*f + d*f*x + 2*d*Tan[e]) + 2*d*(\text{Log}[\cos[e + f*x]] + f*x*\tan[e]))/(8*f^2)
\end{aligned}$$

Maple [A]

time = 0.56, size = 235, normalized size = 1.75

method	result
derivativedivides	$\frac{a^2 c \tan(fx+e) - \frac{a^2 d e \tan(fx+e)}{f} + \frac{a^2 d ((fx+e) \tan(fx+e) + \ln(\cos(fx+e)))}{f} + 2 a^2 c \ln(\sec(fx+e) + \tan(fx+e)) - \frac{2 a^2 d e \ln(\sec(fx+e))}{f}}$
default	$\frac{a^2 c \tan(fx+e) - \frac{a^2 d e \tan(fx+e)}{f} + \frac{a^2 d ((fx+e) \tan(fx+e) + \ln(\cos(fx+e)))}{f} + 2 a^2 c \ln(\sec(fx+e) + \tan(fx+e)) - \frac{2 a^2 d e \ln(\sec(fx+e))}{f}}$
risch	$\frac{a^2 dx^2}{2} + a^2 cx + \frac{2ia^2(dx+c)}{f(e^{2i(fx+e)}+1)} - \frac{2a^2 d \ln(e^{i(fx+e)})}{f^2} + \frac{a^2 d \ln(e^{2i(fx+e)}+1)}{f^2} - \frac{4ia^2 c \arctan(e^{i(fx+e)})}{f} + \frac{4a^2 c \ln(\sec(fx+e) + \tan(fx+e))}{f}$

Verification of antiderivative is not currently implemented for this CAS.

```
[In] int((d*x+c)*(a+a*sec(f*x+e))^2,x,method=_RETURNVERBOSE)
[Out] 1/f*(a^2*c*tan(f*x+e)-a^2/f*d*e*tan(f*x+e)+a^2/f*d*((f*x+e)*tan(f*x+e)+ln(cos(f*x+e)))+2*a^2*c*ln(sec(f*x+e)+tan(f*x+e))-2*a^2/f*d*e*ln(sec(f*x+e)+tan(f*x+e))+2*a^2/f*d*(-(f*x+e))*ln(1+I*exp(I*(f*x+e)))+(f*x+e)*ln(1-I*exp(I*(f*x+e)))+I*dilog(1+I*exp(I*(f*x+e)))-I*dilog(1-I*exp(I*(f*x+e)))+a^2*c*(f*x+e)-a^2/f*d*e*(f*x+e)+1/2*a^2/f*d*(f*x+e)^2)
```

Maxima [F]

time = 0.00, size = 0, normalized size = 0.00

Failed to integrate

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)*(a+a*sec(f*x+e))^2,x, algorithm="maxima")
[Out] 1/2*(a^2*d*f^2*x^2 + 2*a^2*c*f^2*x + (a^2*d*f^2*x^2 + 2*a^2*c*f^2*x)*cos(2*f*x + 2*e)^2 + (a^2*d*f^2*x^2 + 2*a^2*c*f^2*x)*sin(2*f*x + 2*e)^2 + 2*(a^2*d*f^2*x^2 + 2*a^2*c*f^2*x)*cos(2*f*x + 2*e) + 8*(a^2*d*f^3*cos(2*f*x + 2*e)^2 + a^2*d*f^3*sin(2*f*x + 2*e)^2 + 2*a^2*d*f^3*cos(2*f*x + 2*e)^2 + 2*a^2*d*f^3*sin(2*f*x + 2*e)^2 + 2*a^2*d*f^3*cos(2*f*x + 2*e)^2 + a^2*d*f^3*sin(2*f*x + 2*e)^2 + x*cos(2*f*x + 2*e)*cos(f*x + e) + x*sin(2*f*x + 2*e)*sin(f*x + e) + x*cos(f*x + e))/(f*cos(2*f*x + 2*e)^2 + f*sin(2*f*x + 2*e)^2 + 2*f*c os(2*f*x + 2*e) + f) + (a^2*d*cos(2*f*x + 2*e)^2 + a^2*d*sin(2*f*x + 2*e)^2 + 2*a^2*d*cos(2*f*x + 2*e) + a^2*d)*log(cos(2*f*x + 2*e)^2 + sin(2*f*x + 2*e)^2 + 2*cos(2*f*x + 2*e) + 1) + 2*(a^2*c*f*cos(2*f*x + 2*e)^2 + a^2*c*f*sin(2*f*x + 2*e)^2 + 2*a^2*c*f*cos(2*f*x + 2*e) + a^2*c*f)*log(cos(f*x + 2*e)^2 + sin(f*x + 2*e)^2 + 2*cos(f*x + 2*e) + 1) + 2*a^2*c*f*cos(2*f*x + 2*e)^2 + a^2*c*f*sin(2*f*x + 2*e)^2 + 2*a^2*c*f*cos(2*f*x + 2*e) + a^2*c*f)*log(cos(f*x + 2*e)^2 + sin(f*x + 2*e)^2 + 2*cos(f*x + 2*e) + 1)
```

$$e)^2 + \sin(f*x + e)^2 + 2*\sin(f*x + e) + 1) - 2*(a^2*c*f*cos(2*f*x + 2*e)^2 + a^2*c*f*sin(2*f*x + 2*e)^2 + 2*a^2*c*f*cos(2*f*x + 2*e) + a^2*c*f)*\log(\cos(f*x + e)^2 + \sin(f*x + e)^2 - 2*\sin(f*x + e) + 1) + 4*(a^2*d*f*x + a^2*c*f)*\sin(2*f*x + 2*e))/(f^2*cos(2*f*x + 2*e)^2 + f^2*\sin(2*f*x + 2*e)^2 + 2*f^2*cos(2*f*x + 2*e) + f^2)$$

Fricas [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 572 vs. $2(119) = 238$.

time = 2.93, size = 572, normalized size = 4.27

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)*(a+a*sec(f*x+e))^2,x, algorithm="fricas")
[Out] 1/2*(-2*I*a^2*d*cos(f*x + e)*dilog(I*cos(f*x + e) + sin(f*x + e)) - 2*I*a^2*d*cos(f*x + e)*dilog(I*cos(f*x + e) - sin(f*x + e)) + 2*I*a^2*d*cos(f*x + e)*dilog(-I*cos(f*x + e) + sin(f*x + e)) + 2*I*a^2*d*cos(f*x + e)*dilog(-I*cos(f*x + e) - sin(f*x + e)) + (2*a^2*c*f - 2*a^2*d*e + a^2*d)*cos(f*x + e)*log(cos(f*x + e) + I*sin(f*x + e) + I) - (2*a^2*c*f - 2*a^2*d*e - a^2*d)*c os(f*x + e)*log(cos(f*x + e) - I*sin(f*x + e) + I) + 2*(a^2*d*f*x + a^2*d*e)*cos(f*x + e)*log(I*cos(f*x + e) + sin(f*x + e) + 1) - 2*(a^2*d*f*x + a^2*d*e)*cos(f*x + e)*log(I*cos(f*x + e) - sin(f*x + e) + 1) + 2*(a^2*d*f*x + a^2*d*e)*cos(f*x + e)*log(-I*cos(f*x + e) + sin(f*x + e) + 1) - 2*(a^2*d*f*x + a^2*d*e)*cos(f*x + e)*log(-I*cos(f*x + e) - sin(f*x + e) + 1) + (2*a^2*c*f - 2*a^2*d*e + a^2*d)*cos(f*x + e)*log(-cos(f*x + e) + I*sin(f*x + e) + I) - (2*a^2*c*f - 2*a^2*d*e - a^2*d)*cos(f*x + e)*log(-cos(f*x + e) - I*sin(f*x + e) + I) + (a^2*d*f^2*x^2 + 2*a^2*c*f^2*x)*cos(f*x + e) + 2*(a^2*d*f*x + a^2*c*f)*sin(f*x + e))/(f^2*cos(f*x + e))
```

Sympy [F]

time = 0.00, size = 0, normalized size = 0.00

$$a^2 \left(\int c dx + \int 2c \sec(e + fx) dx + \int c \sec^2(e + fx) dx + \int dx dx + \int 2dx \sec(e + fx) dx + \int dx \sec^2(e + fx) dx \right)$$

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)*(a+a*sec(f*x+e))**2,x)
[Out] a**2*(Integral(c, x) + Integral(2*c*sec(e + f*x), x) + Integral(c*sec(e + f*x)**2, x) + Integral(d*x, x) + Integral(2*d*x*sec(e + f*x), x) + Integral(d*x*sec(e + f*x)**2, x))
```

Giac [F]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate((d*x+c)*(a+a*sec(f*x+e))^2,x, algorithm="giac")`

[Out] `integrate((d*x + c)*(a*sec(f*x + e) + a)^2, x)`

Mupad [F]

time = 0.00, size = -1, normalized size = -0.01

$$\int \left(a + \frac{a}{\cos(e + f x)} \right)^2 (c + d x) \, dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] `int((a + a/cos(e + f*x))^2*(c + d*x),x)`

[Out] `int((a + a/cos(e + f*x))^2*(c + d*x), x)`

3.9 $\int \frac{(a+a \sec(e+fx))^2}{c+dx} dx$

Optimal. Leaf size=23

$$\text{Int}\left(\frac{(a + a \sec(e + fx))^2}{c + dx}, x\right)$$

[Out] Unintegrable((a+a*sec(f*x+e))^2/(d*x+c),x)

Rubi [A]

time = 0.03, antiderivative size = 0, normalized size of antiderivative = 0.00, number of steps used = 0, number of rules used = 0, integrand size = 0, $\frac{\text{number of rules}}{\text{integrand size}}$ = 0.000, Rules used = {}

$$\int \frac{(a + a \sec(e + fx))^2}{c + dx} dx$$

Verification is not applicable to the result.

[In] Int[(a + a*Sec[e + f*x])^2/(c + d*x),x]

[Out] Defer[Int][(a + a*Sec[e + f*x])^2/(c + d*x), x]

Rubi steps

$$\int \frac{(a + a \sec(e + fx))^2}{c + dx} dx = \int \frac{(a + a \sec(e + fx))^2}{c + dx} dx$$

Mathematica [A]

time = 29.38, size = 0, normalized size = 0.00

$$\int \frac{(a + a \sec(e + fx))^2}{c + dx} dx$$

Verification is not applicable to the result.

[In] Integrate[(a + a*Sec[e + f*x])^2/(c + d*x),x]

[Out] Integrate[(a + a*Sec[e + f*x])^2/(c + d*x), x]

Maple [A]

time = 0.37, size = 0, normalized size = 0.00

$$\int \frac{(a + a \sec(fx + e))^2}{dx + c} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\int ((a+a*\sec(f*x+e))^2/(d*x+c), x)$
[Out] $\int ((a+a*\sec(f*x+e))^2/(d*x+c), x)$

Maxima [A]

time = 0.00, size = 0, normalized size = 0.00

Failed to integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((a+a*\sec(f*x+e))^2/(d*x+c), x, \text{algorithm}=\text{"maxima"})$
[Out] $((a^2*d*f*x + a^2*c*f)*\cos(2*f*x + 2*e)^2*\log(d*x + c) + 2*a^2*d*\sin(2*f*x + 2*e) + (a^2*d*f*x + a^2*c*f)*\log(d*x + c)*\sin(2*f*x + 2*e)^2 + 2*(a^2*d*f*x + a^2*c*f)*\cos(2*f*x + 2*e)*\log(d*x + c) + (d^2*f*x + c*d*f + (d^2*f*x + c*d*f)*\cos(2*f*x + 2*e)^2 + (d^2*f*x + c*d*f)*\sin(2*f*x + 2*e)^2 + 2*(d^2*f*x + c*d*f)*\cos(2*f*x + 2*e))*\text{integrate}(2*(2*(a^2*d*f*x + a^2*c*f)*\cos(2*f*x + 2*e)*\cos(f*x + e) + 2*(a^2*d*f*x + a^2*c*f)*\cos(f*x + e) + (a^2*d + 2*(a^2*d*f*x + a^2*c*f)*\sin(f*x + e))*\sin(2*f*x + 2*e))/(d^2*f*x^2 + 2*c*d*f*x + c^2*f + (d^2*f*x^2 + 2*c*d*f*x + c^2*f)*\cos(2*f*x + 2*e)^2 + (d^2*f*x^2 + 2*c*d*f*x + c^2*f)*\sin(2*f*x + 2*e)^2 + 2*(d^2*f*x^2 + 2*c*d*f*x + c^2*f)*\cos(2*f*x + 2*e)), x) + (a^2*d*f*x + a^2*c*f)*\log(d*x + c))/(d^2*f*x + c*d*f + (d^2*f*x + c*d*f)*\cos(2*f*x + 2*e)^2 + (d^2*f*x + c*d*f)*\sin(2*f*x + 2*e)^2 + 2*(d^2*f*x + c*d*f)*\cos(2*f*x + 2*e))$

Fricas [A]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((a+a*\sec(f*x+e))^2/(d*x+c), x, \text{algorithm}=\text{"fricas"})$
[Out] $\text{integral}((a^2*\sec(f*x + e)^2 + 2*a^2*\sec(f*x + e) + a^2)/(d*x + c), x)$

Sympy [A]

time = 0.00, size = 0, normalized size = 0.00

$$a^2 \left(\int \frac{2 \sec(e + fx)}{c + dx} dx + \int \frac{\sec^2(e + fx)}{c + dx} dx + \int \frac{1}{c + dx} dx \right)$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((a+a*\sec(f*x+e))**2/(d*x+c), x)$
[Out] $a**2*(\text{Integral}(2*\sec(e + fx)/(c + d*x), x) + \text{Integral}(\sec(e + fx)**2/(c + d*x), x) + \text{Integral}(1/(c + d*x), x))$

Giac [A]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate((a+a*sec(f*x+e))^2/(d*x+c),x, algorithm="giac")`

[Out] `integrate((a*sec(f*x + e) + a)^2/(d*x + c), x)`

Mupad [A]

time = 0.00, size = -1, normalized size = -0.04

$$\int \frac{\left(a + \frac{a}{\cos(e+fx)}\right)^2}{c + dx} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] `int((a + a/cos(e + f*x))^2/(c + d*x),x)`

[Out] `int((a + a/cos(e + f*x))^2/(c + d*x), x)`

3.10 $\int \frac{(a+a \sec(e+fx))^2}{(c+dx)^2} dx$

Optimal. Leaf size=23

$$\text{Int}\left(\frac{(a + a \sec(e + fx))^2}{(c + dx)^2}, x\right)$$

[Out] Unintegrable((a+a*sec(f*x+e))^2/(d*x+c)^2,x)

Rubi [A]

time = 0.03, antiderivative size = 0, normalized size of antiderivative = 0.00, number of steps used = 0, number of rules used = 0, integrand size = 0, $\frac{\text{number of rules}}{\text{integrand size}} = 0.000$, Rules used = {}

$$\int \frac{(a + a \sec(e + fx))^2}{(c + dx)^2} dx$$

Verification is not applicable to the result.

[In] Int[(a + a*Sec[e + f*x])^2/(c + d*x)^2,x]

[Out] Defer[Int][(a + a*Sec[e + f*x])^2/(c + d*x)^2, x]

Rubi steps

$$\int \frac{(a + a \sec(e + fx))^2}{(c + dx)^2} dx = \int \frac{(a + a \sec(e + fx))^2}{(c + dx)^2} dx$$

Mathematica [A]

time = 27.95, size = 0, normalized size = 0.00

$$\int \frac{(a + a \sec(e + fx))^2}{(c + dx)^2} dx$$

Verification is not applicable to the result.

[In] Integrate[(a + a*Sec[e + f*x])^2/(c + d*x)^2,x]

[Out] Integrate[(a + a*Sec[e + f*x])^2/(c + d*x)^2, x]

Maple [A]

time = 0.42, size = 0, normalized size = 0.00

$$\int \frac{(a + a \sec(fx + e))^2}{(dx + c)^2} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\int ((a+a*\sec(f*x+e))^2/(d*x+c)^2, x)$

[Out] $\int ((a+a*\sec(f*x+e))^2/(d*x+c)^2, x)$

Maxima [A]

time = 0.00, size = 0, normalized size = 0.00

Failed to integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((a+a*\sec(f*x+e))^2/(d*x+c)^2, x, \text{algorithm}=\text{"maxima"})$

[Out] $-(a^2*d*f*x + a^2*c*f - 2*a^2*d*\sin(2*f*x + 2*e) + (a^2*d*f*x + a^2*c*f)*\cos(2*f*x + 2*e))^2 + (a^2*d*f*x + a^2*c*f)*\sin(2*f*x + 2*e)^2 + 2*(a^2*d*f*x + a^2*c*f)*\cos(2*f*x + 2*e) - (d^3*f*x^2 + 2*c*d^2*f*x + c^2*d*f + (d^3*f*x^2 + 2*c*d^2*f*x + c^2*d*f)*\cos(2*f*x + 2*e))^2 + (d^3*f*x^2 + 2*c*d^2*f*x + c^2*d*f)*\cos(2*f*x + 2*e)^2 + 2*(d^3*f*x^2 + 2*c*d^2*f*x + c^2*d*f)*\cos(2*f*x + 2*e))*\int(4*((a^2*d*f*x + a^2*c*f)*\cos(2*f*x + 2*e)*\cos(f*x + e) + (a^2*d*f*x + a^2*c*f)*\cos(f*x + e) + (a^2*d + (a^2*d*f*x + a^2*c*f)*\sin(f*x + e))*\sin(2*f*x + 2*e))/(d^3*f*x^3 + 3*c*d^2*f*x^2 + 3*c^2*d*f*x + c^3*f + (d^3*f*x^3 + 3*c*d^2*f*x^2 + 3*c^2*d*f*x + c^3*f)*\cos(2*f*x + 2*e))^2 + (d^3*f*x^3 + 3*c*d^2*f*x^2 + 3*c^2*d*f*x + c^3*f)*\sin(2*f*x + 2*e)^2 + 2*(d^3*f*x^3 + 3*c*d^2*f*x^2 + 3*c^2*d*f*x + c^3*f)*\cos(2*f*x + 2*e)), x))/(d^3*f*x^2 + 2*c*d^2*f*x + c^2*d*f + (d^3*f*x^2 + 2*c*d^2*f*x + c^2*d*f)*\cos(2*f*x + 2*e))^2 + (d^3*f*x^2 + 2*c*d^2*f*x + c^2*d*f)*\sin(2*f*x + 2*e)^2 + 2*(d^3*f*x^2 + 2*c*d^2*f*x + c^2*d*f)*\cos(2*f*x + 2*e))$

Fricas [A]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((a+a*\sec(f*x+e))^2/(d*x+c)^2, x, \text{algorithm}=\text{"fricas"})$

[Out] $\text{integral}((a^2*\sec(f*x + e)^2 + 2*a^2*\sec(f*x + e) + a^2)/(d^2*x^2 + 2*c*d*x + c^2), x)$

Sympy [A]

time = 0.00, size = 0, normalized size = 0.00

$$a^2 \left(\int \frac{2 \sec(e + fx)}{c^2 + 2cdx + d^2x^2} dx + \int \frac{\sec^2(e + fx)}{c^2 + 2cdx + d^2x^2} dx + \int \frac{1}{c^2 + 2cdx + d^2x^2} dx \right)$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((a+a*\sec(f*x+e))**2/(d*x+c)**2, x)$

[Out] $a^2 * (\text{Integral}(2 * \sec(e + f*x) / (c^2 + 2*c*d*x + d^2*x^2), x) + \text{Integral}(\sec(e + f*x)^2 / (c^2 + 2*c*d*x + d^2*x^2), x) + \text{Integral}(1 / (c^2 + 2*c*d*x + d^2*x^2), x))$

Giac [A]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate((a+a*sec(f*x+e))^2/(d*x+c)^2,x, algorithm="giac")`

[Out] `integrate((a*sec(f*x + e) + a)^2/(d*x + c)^2, x)`

Mupad [A]

time = 0.00, size = -1, normalized size = -0.04

$$\int \frac{\left(a + \frac{a}{\cos(e+f x)}\right)^2}{(c + d x)^2} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] `int((a + a/cos(e + f*x))^2/(c + d*x)^2,x)`

[Out] `int((a + a/cos(e + f*x))^2/(c + d*x)^2, x)`

3.11 $\int \frac{(c+dx)^3}{a+a \sec(e+fx)} dx$

Optimal. Leaf size=152

$$\frac{i(c+dx)^3}{af} + \frac{(c+dx)^4}{4ad} - \frac{6d(c+dx)^2 \log(1+e^{i(e+fx)})}{af^2} + \frac{12id^2(c+dx) \text{PolyLog}(2, -e^{i(e+fx)})}{af^3} - \frac{12d^3 \text{PolyLog}(3, -e^{i(e+fx)})}{af^4}$$

[Out] $I*(d*x+c)^3/a/f+1/4*(d*x+c)^4/a/d-6*d*(d*x+c)^2*\ln(1+\exp(I*(f*x+e)))/a/f^2+12*I*d^2*(d*x+c)*\text{polylog}(2, -\exp(I*(f*x+e)))/a/f^3-12*d^3*\text{polylog}(3, -\exp(I*(f*x+e)))/a/f^4-(d*x+c)^3*\tan(1/2*f*x+1/2*e)/a/f$

Rubi [A]

time = 0.23, antiderivative size = 152, normalized size of antiderivative = 1.00, number of steps used = 9, number of rules used = 8, integrand size = 20, $\frac{\text{number of rules}}{\text{integrand size}}$ = 0.400, Rules used = {4276, 3399, 4269, 3800, 2221, 2611, 2320, 6724}

$$\frac{12id^2(c+dx)\text{Li}_2(-e^{i(e+fx)})}{af^3} - \frac{6d(c+dx)^2 \log(1+e^{i(e+fx)})}{af^2} - \frac{(c+dx)^3 \tan(\frac{e}{2} + \frac{fx}{2})}{af} + \frac{i(c+dx)^3}{af} + \frac{(c+dx)^4}{4ad} - \frac{12d^3 \text{Li}_3(-e^{i(e+fx)})}{af^4}$$

Antiderivative was successfully verified.

[In] Int[(c + d*x)^3/(a + a*Sec[e + f*x]), x]

[Out] $(I*(c+d*x)^3/(a*f) + (c+d*x)^4/(4*a*d) - (6*d*(c+d*x)^2*\text{Log}[1+E^(\text{I}*(e+f*x))])/(a*f^2) + ((12*I)*d^2*(c+d*x)*\text{PolyLog}[2, -E^(\text{I}*(e+f*x))])/(a*f^3) - (12*d^3*\text{PolyLog}[3, -E^(\text{I}*(e+f*x))])/(a*f^4) - ((c+d*x)^3*\text{Tan}[e/2 + (f*x)/2])/(a*f)$

Rule 2221

```
Int[((((F_)^((g_.)*(e_.) + (f_.)*(x_))))^(n_.)*(c_.) + (d_.)*(x_.))^(m_.))/((a_.) + (b_.)*(F_)^((g_.)*(e_.) + (f_.)*(x_))))^(n_.)), x_Symbol] :> Simp[((c + d*x)^m/(b*f*g*n*Log[F]))*Log[1 + b*((F^(g*(e + f*x)))^n/a)], x] - Dist[d*(m/(b*f*g*n*Log[F])), Int[(c + d*x)^(m - 1)*Log[1 + b*((F^(g*(e + f*x)))^n/a)], x], x]; FreeQ[{F, a, b, c, d, e, f, g, n}, x] && IGtQ[m, 0]
```

Rule 2320

```
Int[u_, x_Symbol] :> With[{v = FunctionOfExponential[u, x]}, Dist[v/D[v, x], Subst[Int[FunctionOfExponentialFunction[u, x]/x, x], x, v], x]] /; FunctionOfExponentialQ[u, x] && !MatchQ[u, (w_)*((a_.)*(v_)^(n_.))^(m_.)] /; FreeQ[{a, m, n}, x] && IntegerQ[m*n]] && !MatchQ[u, E^((c_.)*((a_.) + (b_.)*x))*(F_)[v_]] /; FreeQ[{a, b, c}, x] && InverseFunctionQ[F[x]]]
```

Rule 2611

```
Int[Log[1 + (e_.)*((F_)^((c_.)*(a_.) + (b_.)*(x_))))^(n_.)]*((f_.) + (g_.)*(x_.))^(m_.), x_Symbol] :> Simp[(-(f + g*x)^m)*(\text{PolyLog}[2, (-e)*(\text{F}^(\text{c}*(a +
```

```
b*x)))^n]/(b*c*n*Log[F])), x] + Dist[g*(m/(b*c*n*Log[F])), Int[(f + g*x)^(m - 1)*PolyLog[2, (-e)*(F^(c*(a + b*x)))^n], x], x] /; FreeQ[{F, a, b, c, e, f, g, n}, x] && GtQ[m, 0]
```

Rule 3399

```
Int[((c_.) + (d_.)*(x_))^(m_.)*((a_) + (b_.)*sin[(e_.) + (f_.)*(x_)])^(n_), x_Symbol] :> Dist[(2*a)^n, Int[(c + d*x)^m*Sin[(1/2)*(e + Pi*(a/(2*b))) + f*(x/2)]^(2*n), x], x] /; FreeQ[{a, b, c, d, e, f, m}, x] && EqQ[a^2 - b^2, 0] && IntegerQ[n] && (GtQ[n, 0] || IGtQ[m, 0])
```

Rule 3800

```
Int[((c_.) + (d_.)*(x_))^(m_.)*tan[(e_.) + (f_.)*(x_)], x_Symbol] :> Simp[I*((c + d*x)^(m + 1)/(d*(m + 1))), x] - Dist[2*I, Int[(c + d*x)^m*(E^(2*I*(e + f*x))/(1 + E^(2*I*(e + f*x)))), x], x] /; FreeQ[{c, d, e, f}, x] && IGtQ[m, 0]
```

Rule 4269

```
Int[csc[(e_.) + (f_.)*(x_)]^2*((c_.) + (d_.)*(x_))^(m_), x_Symbol] :> Simp[[-(c + d*x)^m]*(Cot[e + f*x]/f), x] + Dist[d*(m/f), Int[(c + d*x)^(m - 1)*Cot[e + f*x], x], x] /; FreeQ[{c, d, e, f}, x] && GtQ[m, 0]
```

Rule 4276

```
Int[(csc[(e_.) + (f_.)*(x_)]*(b_.) + (a_))^(n_)*((c_.) + (d_.)*(x_))^(m_), x_Symbol] :> Int[ExpandIntegrand[(c + d*x)^m, 1/(Sin[e + f*x]^n/(b + a*Sin[e + f*x])^n), x], x] /; FreeQ[{a, b, c, d, e, f}, x] && ILtQ[n, 0] && IGtQ[m, 0]
```

Rule 6724

```
Int[PolyLog[n_, (c_.)*((a_.) + (b_.)*(x_))^(p_.)]/((d_.) + (e_.)*(x_)), x_Symbol] :> Simp[PolyLog[n + 1, c*(a + b*x)^p]/(e*p), x] /; FreeQ[{a, b, c, d, e, n, p}, x] && EqQ[b*d, a*e]
```

Rubi steps

$$\begin{aligned}
\int \frac{(c+dx)^3}{a+a \sec(e+fx)} dx &= \int \left(\frac{(c+dx)^3}{a} - \frac{(c+dx)^3}{a+a \cos(e+fx)} \right) dx \\
&= \frac{(c+dx)^4}{4ad} - \int \frac{(c+dx)^3}{a+a \cos(e+fx)} dx \\
&= \frac{(c+dx)^4}{4ad} - \frac{\int (c+dx)^3 \csc^2 \left(\frac{e+\pi}{2} + \frac{fx}{2} \right) dx}{2a} \\
&= \frac{(c+dx)^4}{4ad} - \frac{(c+dx)^3 \tan \left(\frac{e}{2} + \frac{fx}{2} \right)}{af} + \frac{(3d) \int (c+dx)^2 \tan \left(\frac{e}{2} + \frac{fx}{2} \right) dx}{af} \\
&= \frac{i(c+dx)^3}{af} + \frac{(c+dx)^4}{4ad} - \frac{(c+dx)^3 \tan \left(\frac{e}{2} + \frac{fx}{2} \right)}{af} - \frac{(6id) \int \frac{e^{2i(\frac{e}{2}+\frac{fx}{2})}(c+dx)^2}{1+e^{2i(\frac{e}{2}+\frac{fx}{2})}} dx}{af} \\
&= \frac{i(c+dx)^3}{af} + \frac{(c+dx)^4}{4ad} - \frac{6d(c+dx)^2 \log(1+e^{i(e+fx)})}{af^2} - \frac{(c+dx)^3 \tan \left(\frac{e}{2} + \frac{fx}{2} \right)}{af} \\
&= \frac{i(c+dx)^3}{af} + \frac{(c+dx)^4}{4ad} - \frac{6d(c+dx)^2 \log(1+e^{i(e+fx)})}{af^2} + \frac{12id^2(c+dx)\text{Li}_2(-e^{i(e+fx)})}{af^3} \\
&= \frac{i(c+dx)^3}{af} + \frac{(c+dx)^4}{4ad} - \frac{6d(c+dx)^2 \log(1+e^{i(e+fx)})}{af^2} + \frac{12id^2(c+dx)\text{Li}_2(-e^{i(e+fx)})}{af^3}
\end{aligned}$$

Mathematica [A]

time = 1.53, size = 253, normalized size = 1.66

$$\cos \left(\frac{1}{2}(e+fx)\right) \sec(e+fx) \left(x(4c^3+6c^2dx+4cd^2x^2+d^3x^3) \cos \left(\frac{1}{2}(e+fx)\right) + \frac{8d \cos \left(\frac{1}{2}(e+fx)\right) \left(-3f^2(c+dx)^2 \log(1+\cos(e+fx)+i \sin(e+fx))+6idf(c+dx) \text{PolyLog}[2,-\cos(e+fx)-i \sin(e+fx)]-6d^2 \text{PolyLog}[3,-\cos(e+fx)-i \sin(e+fx)]+\frac{if^3 d \left(3 c^2+3 c d x+d^2 x^2\right) (\cos(e)+i \sin(e))}{1+\cos(e)+i \sin(e)}\right)}{f^4} - \frac{4(c+dx)^3 \sec \left(\frac{e}{2}\right) \sin \left(\frac{fx}{2}\right)}{f} \right)$$

Antiderivative was successfully verified.

[In] `Integrate[(c + d*x)^3/(a + a*Sec[e + f*x]), x]`

[Out] `(Cos[(e + f*x)/2]*Sec[e + f*x]*(x*(4*c^3 + 6*c^2*d*x + 4*c*d^2*x^2 + d^3*x^3)*Cos[(e + f*x)/2] + (8*d*Cos[(e + f*x)/2]*(-3*f^2*(c + d*x)^2*Log[1 + Cos[e + f*x] + I*Sin[e + f*x]] + (6*I)*d*f*(c + d*x)*PolyLog[2, -Cos[e + f*x] - I*Sin[e + f*x]] - 6*d^2*PolyLog[3, -Cos[e + f*x] - I*Sin[e + f*x]] + (I*f^3*x*(3*c^2 + 3*c*d*x + d^2*x^2)*(Cos[e] + I*Sin[e]))/(1 + Cos[e] + I*Sin[e])))/f^4 - (4*(c + d*x)^3*Sec[e/2]*Sin[(f*x)/2])/f))/(2*a*(1 + Sec[e + f*x]))`

Maple [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 416 vs. $2(138) = 276$.

time = 0.76, size = 417, normalized size = 2.74

method	result
risch	$\frac{d^3x^4}{4a} + \frac{d^2cx^3}{a} + \frac{3dc^2x^2}{2a} + \frac{c^3x}{a} + \frac{c^4}{4ad} - \frac{6id^3e^2x}{af^3} - \frac{6dc^2\ln(e^{i(fx+e)}+1)}{af^2} + \frac{6dc^2\ln(e^{i(fx+e)})}{af^2} + \frac{6d^3e^2\ln(e^{i(fx+e)})}{af^4}$

Verification of antiderivative is not currently implemented for this CAS.

```
[In] int((d*x+c)^3/(a+a*sec(f*x+e)),x,method=_RETURNVERBOSE)
[Out] 1/4/a*d^3*x^4+1/a*d^2*c*x^3+3/2/a*d*c^2*x^2+1/a*c^3*x+1/4/a/d*c^4-6*I/a/f^3
*d^3*e^2*x-6/a/f^2*d*c^2*ln(exp(I*(f*x+e))+1)+6/a/f^2*d*c^2*ln(exp(I*(f*x+e)))
)+6/a/f^4*d^3*e^2*ln(exp(I*(f*x+e)))-2*I*(d^3*x^3+3*c*d^2*x^2+3*c^2*d*x+c^3)/f/a/(exp(I*(f*x+e))+1)-12/a/f^2*d^2*c*ln(exp(I*(f*x+e))+1)*x+2*I/a/f*d^3*x^3-6/a/f^2*d^3*ln(exp(I*(f*x+e))+1)*x^2-4*I/a/f^4*d^3*e^3-12*d^3*polylog(3,-exp(I*(f*x+e)))/a/f^4-12/a/f^3*d^2*c*e*ln(exp(I*(f*x+e)))+12*I/a/f^3*d^3*polylog(2,-exp(I*(f*x+e)))*x+6*I/a/f^3*d^2*c*e^2+12*I/a/f^3*d^2*c*polylog(2,-exp(I*(f*x+e)))+12*I/a/f^2*d^2*c*e*x+6*I/a/f*d^2*c*x^2
```

Maxima [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 1364 vs. $2(139) = 278$.

time = 0.69, size = 1364, normalized size = 8.97

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)^3/(a+a*sec(f*x+e)),x, algorithm="maxima")
[Out] 1/2*(6*c*d^2*(2*arctan(sin(f*x + e)/(cos(f*x + e) + 1))/(a*f^2) - sin(f*x + e)/(a*f^2*(cos(f*x + e) + 1)))*e^2 - 6*c^2*d*(2*arctan(sin(f*x + e)/(cos(f*x + e) + 1))/(a*f) - sin(f*x + e)/(a*f*(cos(f*x + e) + 1)))*e + 2*c^3*(2*a*rctan(sin(f*x + e)/(cos(f*x + e) + 1))/a - sin(f*x + e)/(a*(cos(f*x + e) + 1))) - 6*((f*x + e)^2*cos(f*x + e)^2 + (f*x + e)^2*sin(f*x + e)^2 + 2*(f*x + e)^2*cos(f*x + e) + (f*x + e)^2 - 2*(cos(f*x + e)^2 + sin(f*x + e)^2 + 2*cos(f*x + e) + 1)*log(cos(f*x + e)^2 + sin(f*x + e)^2 + 2*cos(f*x + e) + 1) - 4*(f*x + e)*sin(f*x + e))*c*d^2*e/(a*f^2*cos(f*x + e)^2 + a*f^2*sin(f*x + e)^2 + 2*a*f^2*cos(f*x + e) + a*f^2) + 3*((f*x + e)^2*cos(f*x + e)^2 + (f*x + e)^2*sin(f*x + e)^2 + 2*(f*x + e)^2*cos(f*x + e) + (f*x + e)^2 - 2*(cos(f*x + e)^2 + sin(f*x + e)^2 + 2*cos(f*x + e) + 1)*log(cos(f*x + e)^2 + sin(f*x + e)^2 + 2*cos(f*x + e) + 1) - 4*(f*x + e)*sin(f*x + e))*c^2*d/(a*f*c*cos(f*x + e)^2 + a*f*sin(f*x + e)^2 + 2*a*f*cos(f*x + e) + a*f) - 2*(I*(f*x + e)^4*d^3 + 6*I*(f*x + e)^2*d^3*e^2 - 4*I*(f*x + e)*d^3*e^3 - 4*(-I*c*d^2*f + I*d^3*e)*(f*x + e)^3 - 8*d^3*e^3 + 24*((f*x + e)^2*d^3 + d^3*e^2 + 2*(c*d^2*f - d^3*e)*(f*x + e) + ((f*x + e)^2*d^3 + d^3*e^2 + 2*(c*d^2*f - d^3*e)
```

$$\begin{aligned}
&)*(f*x + e))*cos(f*x + e) - (-I*(f*x + e)^2*d^3 - I*d^3*e^2 + 2*(-I*c*d^2*f \\
&+ I*d^3*e)*(f*x + e))*sin(f*x + e))*arctan2(sin(f*x + e), cos(f*x + e) + 1 \\
&)+ (I*(f*x + e)^4*d^3 - 4*(f*x + e)*d^3*(I*e^3 + 6*e^2) - 4*(-I*c*d^2*f + \\
&d^3*(I*e + 2))*(f*x + e)^3 - 6*(4*c*d^2*f + d^3*(-I*e^2 - 4*e))*(f*x + e)^2 \\
&)*cos(f*x + e) - 48*((f*x + e)*d^3 + c*d^2*f - d^3*e + ((f*x + e)*d^3 + c*d \\
&^2*f - d^3*e)*cos(f*x + e) + (I*(f*x + e)*d^3 + I*c*d^2*f - I*d^3*e)*sin(f* \\
&x + e))*dilog(-e^(I*f*x + I*e)) - 12*(I*(f*x + e)^2*d^3 + I*d^3*e^2 + 2*(I* \\
&c*d^2*f - I*d^3*e)*(f*x + e) + (I*(f*x + e)^2*d^3 + I*d^3*e^2 + 2*(I*c*d^2*f \\
&- I*d^3*e)*(f*x + e))*cos(f*x + e) - ((f*x + e)^2*d^3 + d^3*e^2 + 2*(c*d^2*f \\
&- d^3*e)*(f*x + e))*sin(f*x + e))*log(cos(f*x + e)^2 + sin(f*x + e)^2 + \\
&2*cos(f*x + e) + 1) - 48*(I*d^3*cos(f*x + e) - d^3*sin(f*x + e) + I*d^3)*p \\
&olylog(3, -e^(I*f*x + I*e)) - ((f*x + e)^4*d^3 - 4*(f*x + e)*d^3*(e^3 - 6*I \\
&*e^2) + 4*(c*d^2*f - d^3*(e - 2*I))*(f*x + e)^3 + 6*(4*I*c*d^2*f + d^3*(e^2 \\
&- 4*I*e))*(f*x + e)^2)*sin(f*x + e))/(-4*I*a*f^3*cos(f*x + e) + 4*a*f^3*si \\
&n(f*x + e) - 4*I*a*f^3))/f
\end{aligned}$$

Fricas [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 537 vs. $2(139) = 278$.

time = 2.52, size = 537, normalized size = 3.53

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)^3/(a+a*sec(f*x+e)),x, algorithm="fricas")
[Out] 1/4*(d^3*f^4*x^4 + 4*c*d^2*f^4*x^3 + 6*c^2*d*f^4*x^2 + 4*c^3*f^4*x + (d^3*f
^4*x^4 + 4*c*d^2*f^4*x^3 + 6*c^2*d*f^4*x^2 + 4*c^3*f^4*x)*cos(f*x + e) - 24
*(I*d^3*f*x + I*c*d^2*f + (I*d^3*f*x + I*c*d^2*f)*cos(f*x + e))*dilog(-cos(
f*x + e) + I*sin(f*x + e)) - 24*(-I*d^3*f*x - I*c*d^2*f + (-I*d^3*f*x - I*c
*d^2*f)*cos(f*x + e))*dilog(-cos(f*x + e) - I*sin(f*x + e)) - 12*(d^3*f^2*x
^2 + 2*c*d^2*f^2*x + c^2*d*f^2 + (d^3*f^2*x^2 + 2*c*d^2*f^2*x + c^2*d*f^2)*
cos(f*x + e))*log(cos(f*x + e) + I*sin(f*x + e) + 1) - 12*(d^3*f^2*x^2 + 2*
c*d^2*f^2*x + c^2*d*f^2 + (d^3*f^2*x^2 + 2*c*d^2*f^2*x + c^2*d*f^2)*cos(f*x
+ e))*log(cos(f*x + e) - I*sin(f*x + e) + 1) - 24*(d^3*cos(f*x + e) + d^3)*p
olylog(3, -cos(f*x + e) + I*sin(f*x + e)) - 24*(d^3*cos(f*x + e) + d^3)*p
olylog(3, -cos(f*x + e) - I*sin(f*x + e)) - 4*(d^3*f^3*x^3 + 3*c*d^2*f^3*x^2 +
3*c^2*d*f^3*x + c^3*f^3)*sin(f*x + e))/(a*f^4*cos(f*x + e) + a*f^4)
```

Sympy [F]

time = 0.00, size = 0, normalized size = 0.00

$$\int \frac{c^3}{\sec(e+fx)+1} dx + \int \frac{d^3 x^3}{\sec(e+fx)+1} dx + \int \frac{3cd^2 x^2}{\sec(e+fx)+1} dx + \int \frac{3c^2 dx}{\sec(e+fx)+1} dx$$

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)**3/(a+a*sec(f*x+e)),x)
```

[Out] $\text{Integral}(c^{**3}/(\sec(e + f*x) + 1), x) + \text{Integral}(d^{**3}x^{**3}/(\sec(e + f*x) + 1), x) + \text{Integral}(3*c*d^{**2}x^{**2}/(\sec(e + f*x) + 1), x) + \text{Integral}(3*c^{**2}*d*x/(\sec(e + f*x) + 1), x))/a$

Giac [F]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate((d*x+c)^3/(a+a*sec(f*x+e)),x, algorithm="giac")`

[Out] `integrate((d*x + c)^3/(a*sec(f*x + e) + a), x)`

Mupad [F]

time = 0.00, size = -1, normalized size = -0.01

$$\int \frac{(c + d x)^3}{a + \frac{a}{\cos(e + f x)}} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] `int((c + d*x)^3/(a + a/cos(e + f*x)),x)`

[Out] `int((c + d*x)^3/(a + a/cos(e + f*x)), x)`

3.12 $\int \frac{(c+dx)^2}{a+a \sec(e+fx)} dx$

Optimal. Leaf size=119

$$\frac{i(c+dx)^2}{af} + \frac{(c+dx)^3}{3ad} - \frac{4d(c+dx) \log(1+e^{i(e+fx)})}{af^2} + \frac{4id^2 \text{PolyLog}(2, -e^{i(e+fx)})}{af^3} - \frac{(c+dx)^2 \tan(\frac{e}{2} + \frac{fx}{2})}{af}$$

[Out] $I*(d*x+c)^2/a/f+1/3*(d*x+c)^3/a/d-4*d*(d*x+c)*\ln(1+\exp(I*(f*x+e)))/a/f^2+4*I*d^2*\text{polylog}(2, -\exp(I*(f*x+e)))/a/f^3-(d*x+c)^2\tan(1/2*f*x+1/2*e)/a/f$

Rubi [A]

time = 0.17, antiderivative size = 119, normalized size of antiderivative = 1.00, number of steps used = 8, number of rules used = 7, integrand size = 20, $\frac{\text{number of rules}}{\text{integrand size}}$ = 0.350, Rules used = {4276, 3399, 4269, 3800, 2221, 2317, 2438}

$$-\frac{4d(c+dx) \log(1+e^{i(e+fx)})}{af^2} - \frac{(c+dx)^2 \tan(\frac{e}{2} + \frac{fx}{2})}{af} + \frac{i(c+dx)^2}{af} + \frac{(c+dx)^3}{3ad} + \frac{4id^2 \text{Li}_2(-e^{i(e+fx)})}{af^3}$$

Antiderivative was successfully verified.

[In] Int[(c + d*x)^2/(a + a*Sec[e + f*x]), x]

[Out] $(I*(c+d*x)^2)/(a*f) + (c+d*x)^3/(3*a*d) - (4*d*(c+d*x)*\text{Log}[1+E^{I*(e+f*x)}])/(a*f^2) + ((4*I)*d^2*\text{PolyLog}[2, -E^{I*(e+f*x)}])/(a*f^3) - ((c+d*x)^2*\text{Tan}[e/2 + (f*x)/2])/(a*f)$

Rule 2221

```
Int[((F_)((g_.)*(e_.)+(f_.)*(x_.)))^(n_.)*((c_.)+(d_.)*(x_.))^(m_.))/((a_.)+(b_.)*((F_)((g_.)*(e_.)+(f_.)*(x_.)))^(n_.)), x_Symbol] :> Simp[((c+d*x)^m/(b*f*g*n*\text{Log}[F]))*\text{Log}[1+b*((F^(g*(e+f*x)))^n/a)], x] - Dist[d*(m/(b*f*g*n*\text{Log}[F])), Int[(c+d*x)^(m-1)*\text{Log}[1+b*((F^(g*(e+f*x)))^n/a)], x], x]; FreeQ[{F, a, b, c, d, e, f, g, n}, x] && IGtQ[m, 0]
```

Rule 2317

```
Int[Log[(a_.)+(b_.)*((F_)((e_.)*(c_.)+(d_.)*(x_.)))^(n_.))], x_Symbol] :> Dist[1/(d*e*n*\text{Log}[F]), Subst[Int[Log[a+b*x]/x, x], x, (F^(e*(c+d*x)))^n], x]; FreeQ[{F, a, b, c, d, e, n}, x] && GtQ[a, 0]
```

Rule 2438

```
Int[Log[(c_.)*(d_.)+(e_.)*(x_.))^(n_.)]/(x_), x_Symbol] :> Simp[-\text{PolyLog}[2, (-c)*e*x^n]/n, x]; FreeQ[{c, d, e, n}, x] && EqQ[c*d, 1]
```

Rule 3399

```
Int[((c_.) + (d_.)*(x_))^(m_.)*((a_) + (b_.)*sin[(e_.) + (f_.)*(x_)])^(n_.)
, x_Symbol] :> Dist[(2*a)^n, Int[(c + d*x)^m*Sin[(1/2)*(e + Pi*(a/(2*b))) +
f*(x/2)]^(2*n), x], x] /; FreeQ[{a, b, c, d, e, f, m}, x] && EqQ[a^2 - b^2
, 0] && IntegerQ[n] && (GtQ[n, 0] || IGtQ[m, 0])
```

Rule 3800

```
Int[((c_.) + (d_.)*(x_))^(m_.)*tan[(e_.) + (f_.)*(x_)], x_Symbol] :> Simp[I
*((c + d*x)^(m + 1)/(d*(m + 1))), x] - Dist[2*I, Int[(c + d*x)^m*(E^(2*I*(e
+ f*x))/(1 + E^(2*I*(e + f*x)))), x], x] /; FreeQ[{c, d, e, f}, x] && IGtQ
[m, 0]
```

Rule 4269

```
Int[csc[(e_.) + (f_.)*(x_)]^2*((c_.) + (d_.)*(x_))^(m_.), x_Symbol] :> Simp
[(-(c + d*x)^m)*(Cot[e + f*x]/f), x] + Dist[d*(m/f), Int[(c + d*x)^(m - 1)*
Cot[e + f*x], x], x] /; FreeQ[{c, d, e, f}, x] && GtQ[m, 0]
```

Rule 4276

```
Int[(csc[(e_.) + (f_.)*(x_)]*(b_.) + (a_))^(n_.)*((c_.) + (d_.)*(x_))^(m_.)
, x_Symbol] :> Int[ExpandIntegrand[(c + d*x)^m, 1/(Sin[e + f*x]^n/(b + a*Si
n[e + f*x])^n), x], x] /; FreeQ[{a, b, c, d, e, f}, x] && ILtQ[n, 0] && IGt
Q[m, 0]
```

Rubi steps

$$\begin{aligned}
\int \frac{(c+dx)^2}{a+a \sec(e+fx)} dx &= \int \left(\frac{(c+dx)^2}{a} - \frac{(c+dx)^2}{a+a \cos(e+fx)} \right) dx \\
&= \frac{(c+dx)^3}{3ad} - \int \frac{(c+dx)^2}{a+a \cos(e+fx)} dx \\
&= \frac{(c+dx)^3}{3ad} - \frac{\int (c+dx)^2 \csc^2(\frac{e+\pi}{2} + \frac{fx}{2}) dx}{2a} \\
&= \frac{(c+dx)^3}{3ad} - \frac{(c+dx)^2 \tan(\frac{e}{2} + \frac{fx}{2})}{af} + \frac{(2d) \int (c+dx) \tan(\frac{e}{2} + \frac{fx}{2}) dx}{af} \\
&= \frac{i(c+dx)^2}{af} + \frac{(c+dx)^3}{3ad} - \frac{(c+dx)^2 \tan(\frac{e}{2} + \frac{fx}{2})}{af} - \frac{(4id) \int \frac{e^{2i(\frac{e}{2} + \frac{fx}{2})}(c+dx)}{1+e^{2i(\frac{e}{2} + \frac{fx}{2})}} dx}{af} \\
&= \frac{i(c+dx)^2}{af} + \frac{(c+dx)^3}{3ad} - \frac{4d(c+dx) \log(1+e^{i(e+fx)})}{af^2} - \frac{(c+dx)^2 \tan(\frac{e}{2} + \frac{fx}{2})}{af} \\
&= \frac{i(c+dx)^2}{af} + \frac{(c+dx)^3}{3ad} - \frac{4d(c+dx) \log(1+e^{i(e+fx)})}{af^2} - \frac{(c+dx)^2 \tan(\frac{e}{2} + \frac{fx}{2})}{af} \\
&= \frac{i(c+dx)^2}{af} + \frac{(c+dx)^3}{3ad} - \frac{4d(c+dx) \log(1+e^{i(e+fx)})}{af^2} + \frac{4id^2 \text{Li}_2(-e^{i(e+fx)})}{af^3} - \frac{(c+dx)^2 \tan(\frac{e}{2} + \frac{fx}{2})}{af}
\end{aligned}$$

Mathematica [B] Both result and optimal contain complex but leaf count is larger than twice the leaf count of optimal. 528 vs. $2(119) = 238$.

time = 6.37, size = 528, normalized size = 4.44

$$\frac{2(3d^2 + 3ad + d^2a^2)\cos^2(\frac{1}{2} + \frac{f}{2})\sec(e+fx) - 2d\cos^2(\frac{1}{2} + \frac{f}{2})\sec(\frac{1}{2})\sec(e+fx)(\cos(\frac{1}{2}\cos(\frac{1}{2}) - \sin(\frac{1}{2}\sin(\frac{1}{2}))) + \frac{1}{2}x\sin(\frac{1}{2}))}{f^2(\sec(e+sec(e+fx))\cos^2(\frac{1}{2} + \frac{f}{2}))} - \frac{\frac{8d^2\cos^2(\frac{1}{2} + \frac{f}{2})\sec(\frac{1}{2})}{f^2(\sec(e+sec(e+fx))\cos^2(\frac{1}{2} + \frac{f}{2}))} \left(\frac{2e^{-i(\arctan(\sec(\frac{1}{2}) + \tan(\frac{1}{2}))) - i(\arctan(\sec(\frac{1}{2}) + \tan(\frac{1}{2})))}}{1 + \cos^2(\frac{f}{2})} + \frac{-2\sqrt{i(\sec(\frac{1}{2}) + \tan(\frac{1}{2}))} \cdot i(\arctan(\sec(\frac{1}{2}) + \tan(\frac{1}{2}))) \cdot \text{PolyLog}(i, e^{i(\arctan(\sec(\frac{1}{2}) + \tan(\frac{1}{2})))})}{1 + \cos^2(\frac{f}{2})} \right) \sec(\frac{1}{2})\sec(e+fx)}{f^2(\sec(e+sec(e+fx))\cos^2(\frac{1}{2} + \frac{f}{2}))} - \frac{2\cos(\frac{1}{2})\sec(\frac{1}{2})\sec(e+fx)(a^2\sin(\frac{1}{2}) + 2dx\sin(\frac{1}{2}) + d^2a^2\sin(\frac{1}{2}))}{f^2(\sec(e+sec(e+fx))\cos^2(\frac{1}{2} + \frac{f}{2}))}$$

Warning: Unable to verify antiderivative.

```
[In] Integrate[(c + d*x)^2/(a + a*Sec[e + f*x]), x]
[Out] (2*x*(3*c^2 + 3*c*d*x + d^2*x^2)*Cos[e/2 + (f*x)/2]^2*Sec[e + f*x])/(3*(a + a*Sec[e + f*x])) - (8*c*d*Cos[e/2 + (f*x)/2]^2*Sec[e/2]*Sec[e + f*x]*(Cos[e/2]*Log[Cos[e/2]*Cos[(f*x)/2] - Sin[e/2]*Sin[(f*x)/2]] + (f*x*Sin[e/2])/2))/(f^2*(a + a*Sec[e + f*x])*(Cos[e/2]^2 + Sin[e/2]^2)) - (8*d^2*2*Cos[e/2 + (f*x)/2]^2*Csc[e/2]*((f^2*x^2)/(4*E^(I*ArcTan[Cot[e/2]]))) - (Cot[e/2]*((I/2)*f*x*(-Pi - 2*ArcTan[Cot[e/2]])) - Pi*Log[1 + E^((-I)*f*x)] - 2*((f*x)/2 - ArcTan[Cot[e/2]])*Log[1 - E^((2*I)*((f*x)/2 - ArcTan[Cot[e/2]]))] + Pi*Log[Cos[(f*x)/2]] - 2*ArcTan[Cot[e/2]]*Log[Sin[(f*x)/2 - ArcTan[Cot[e/2]]]] + I*PolyLog[2, E^((2*I)*((f*x)/2 - ArcTan[Cot[e/2]]))])/Sqrt[1 + Cot[e/2]^2])*Sec[e/2]*Sec[e + f*x]/(f^3*(a + a*Sec[e + f*x])*Sqrt[Csc[e/2]^2*(Cos[e/2]^2 + Sin[e/2]^2)]) - (2*Cos[e/2 + (f*x)/2]*Sec[e/2]*Sec[e + f*x]*(c^2*Sin[(f*x)/2]^2 + d^2*a^2*Sin[(f*x)/2]^2))/f^3
```

$\text{**x})/2] + 2*c*d*x*\text{Sin}[(f*x)/2] + d^2*x^2*\text{Sin}[(f*x)/2]))/(f*(a + a*\text{Sec}[e + f*x]))$

Maple [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 235 vs. $2(107) = 214$.

time = 0.66, size = 236, normalized size = 1.98

method	result
risch	$\frac{d^2x^3}{3a} + \frac{d cx^2}{a} + \frac{c^2 x}{a} + \frac{c^3}{3ad} - \frac{2i(d^2x^2+2cdx+c^2)}{fa(e^{i(fx+e)}+1)} + \frac{4dc\ln(e^{i(fx+e)})}{af^2} - \frac{4dc\ln(e^{i(fx+e)}+1)}{af^2} + \frac{2id^2x^2}{af} + \frac{4id^2ex}{af^2} + \frac{2id^2f}{af}$

Verification of antiderivative is not currently implemented for this CAS.

[In] `int((d*x+c)^2/(a+a*sec(f*x+e)),x,method=_RETURNVERBOSE)`

[Out] $1/3/a*d^2*x^3+1/a*d*c*x^2+1/a*c^2*x+1/3/a/d*c^3-2*I*(d^2*x^2+2*c*d*x+c^2)/f/a/(\exp(I*(f*x+e))+1)+4/a/f^2*d*c*\ln(\exp(I*(f*x+e)))-4/a/f^2*d*c*\ln(\exp(I*(f*x+e))+1)+2*I/a/f*d^2*x^2+4*I/a/f^2*d^2*x^2+2*I/a/f^3*d^2*x^2-4/a/f^2*d^2*\ln(\exp(I*(f*x+e))+1)*x+4*I*d^2*polylog(2,-\exp(I*(f*x+e)))/a/f^3-4/a/f^3*d^2*x*\ln(\exp(I*(f*x+e)))$

Maxima [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 393 vs. $2(107) = 214$.

time = 0.67, size = 393, normalized size = 3.30

$(d^2f^2x^3+3icdf^2x^2+3ic^2f^2x+4c^3f^2+4d^2fx+icdf^2\cos(fx+e)-icdf^2\sin(fx+e)+icdf^2\arctan(\sin(fx+e),\cos(fx+e))+icdf^2\cos(fx+e)+1)+(id^2f^2x^2-2icdf^2x^2+4icdf^2x)\cos(fx+e)+id^2f^2x+icdf^2\sin(fx+e)+id^2f^2x+icdf^2\cos(fx+e)+\sin(fx+e)^2+2\cos(fx+e)+1)-(d^2f^2x^2+2icdf^2x^2+2icdf^2x)\sin(fx+e)-3icdf^2\cos(fx+e)+2icdf^2\sin(fx+e)-3icdf^2$

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate((d*x+c)^2/(a+a*sec(f*x+e)),x, algorithm="maxima")`

[Out] $-(I*d^2*f^3*x^3+3*I*c*d*f^3*x^2+3*I*c^2*f^2*x+6*c^2*f^2+12*(d^2*f*x+c*d*f+(d^2*f*x+c*d*f)*\cos(f*x+e)-(-I*d^2*f*x-I*c*d*f)*\sin(f*x+e))*\arctan2(\sin(f*x+e),\cos(f*x+e)+1)+(I*d^2*f^3*x^3-3*(-I*c*d*f^3+2*d^2*f^2)*x^2-3*(-I*c^2*f^3+4*c*d*f^2)*x)*\cos(f*x+e)-12*(d^2*f\cos(fx+e)+id^2f\sin(fx+e)+id^2f\ln(-\exp(I*(f*x+I*e)))-6(id^2f*x+icdf^2\cos(fx+e)+id^2f*x+icdf^2\sin(fx+e)+2*\cos(fx+e)+1)-(d^2f^3*x^2+2icdf^2x^2+2icdf^2x)\sin(fx+e)-3icdf^2\cos(fx+e)+2icdf^2\sin(fx+e)-3icdf^2)/(3icf^2)$

Fricas [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 307 vs. $2(107) = 214$.

time = 3.30, size = 307, normalized size = 2.58

$(d^2f^2x^3+3icdf^2x^2+3ic^2f^2x+4c^3f^2+4d^2fx+icdf^2\cos(fx+e)-6(id^2f\cos(fx+e)+id^2f\ln(-\exp(I*(f*x+I*e)))-6(-id^2f\cos(fx+e)-i\sin(fx+e)-id^2f\ln(-\exp(I*(f*x+I*e)))-6(id^2f\cos(fx+e)+icdf^2\cos(fx+e)+i\sin(fx+e)+1)\sin(fx+e)+1)\sin(fx+e)+1)\sin(fx+e)-i\sin(fx+e)+1)-(d^2f^2x^2+2icdf^2x^2+2icdf^2x)\sin(fx+e)-3icdf^2\cos(fx+e)+2icdf^2\sin(fx+e))$

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate((d*x+c)^2/(a+a*sec(f*x+e)),x, algorithm="fricas")`

[Out]
$$\frac{1/3*(d^2*f^3*x^3 + 3*c*d*f^3*x^2 + 3*c^2*f^3*x + (d^2*f^3*x^3 + 3*c*d*f^3*x^2 + 3*c^2*f^3*x)*cos(f*x + e) - 6*(I*d^2*cos(f*x + e) + I*d^2)*dilog(-cos(f*x + e) + I*sin(f*x + e)) - 6*(-I*d^2*cos(f*x + e) - I*d^2)*dilog(-cos(f*x + e) - I*sin(f*x + e)) - 6*(d^2*f*x + c*d*f + (d^2*f*x + c*d*f)*cos(f*x + e))*log(cos(f*x + e) + I*sin(f*x + e) + 1) - 6*(d^2*f*x + c*d*f + (d^2*f*x + c*d*f)*cos(f*x + e))*log(cos(f*x + e) - I*sin(f*x + e) + 1) - 3*(d^2*f^2*x^2 + 2*c*d*f^2*x + c^2*f^2)*sin(f*x + e))/(a*f^3*cos(f*x + e) + a*f^3)$$

Sympy [F]

time = 0.00, size = 0, normalized size = 0.00

$$\frac{\int \frac{c^2}{\sec(e+fx)+1} dx + \int \frac{d^2x^2}{\sec(e+fx)+1} dx + \int \frac{2cdx}{\sec(e+fx)+1} dx}{a}$$

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate((d*x+c)**2/(a+a*sec(f*x+e)),x)`

[Out]
$$(Integral(c**2/(\sec(e + f*x) + 1), x) + Integral(d**2*x**2/(\sec(e + f*x) + 1), x) + Integral(2*c*d*x/(\sec(e + f*x) + 1), x))/a$$

Giac [F]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate((d*x+c)^2/(a+a*sec(f*x+e)),x, algorithm="giac")`

[Out] `integrate((d*x + c)^2/(a*sec(f*x + e) + a), x)`

Mupad [F]

time = 0.00, size = -1, normalized size = -0.01

$$\int \frac{(c + d x)^2}{a + \frac{a}{\cos(e+fx)}} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] `int((c + d*x)^2/(a + a/cos(e + f*x)),x)`

[Out] `int((c + d*x)^2/(a + a/cos(e + f*x)), x)`

3.13 $\int \frac{c+dx}{a+a \sec(e+fx)} dx$

Optimal. Leaf size=67

$$\frac{(c+dx)^2}{2ad} - \frac{2d \log \left(\cos \left(\frac{e}{2} + \frac{fx}{2} \right) \right)}{af^2} - \frac{(c+dx) \tan \left(\frac{e}{2} + \frac{fx}{2} \right)}{af}$$

[Out] $1/2*(d*x+c)^2/a/d-2*d*ln(\cos(1/2*f*x+1/2*e))/a/f^2-(d*x+c)*\tan(1/2*f*x+1/2*e)/a/f$

Rubi [A]

time = 0.07, antiderivative size = 67, normalized size of antiderivative = 1.00, number of steps used = 5, number of rules used = 4, integrand size = 18, $\frac{\text{number of rules}}{\text{integrand size}}$ = 0.222, Rules used = {4276, 3399, 4269, 3556}

$$-\frac{(c+dx) \tan \left(\frac{e}{2} + \frac{fx}{2} \right)}{af} + \frac{(c+dx)^2}{2ad} - \frac{2d \log \left(\cos \left(\frac{e}{2} + \frac{fx}{2} \right) \right)}{af^2}$$

Antiderivative was successfully verified.

[In] $\text{Int}[(c + d*x)/(a + a*\text{Sec}[e + f*x]), x]$

[Out] $(c + d*x)^2/(2*a*d) - (2*d*\text{Log}[\text{Cos}[e/2 + (f*x)/2]]/(a*f^2) - ((c + d*x)*\text{Tan}[e/2 + (f*x)/2])/(a*f)$

Rule 3399

```
Int[((c_.) + (d_.)*(x_))^(m_.)*((a_) + (b_.)*sin[(e_.) + (f_.)*(x_)])^(n_.), x_Symbol] :> Dist[(2*a)^n, Int[(c + d*x)^m*Sin[(1/2)*(e + Pi*(a/(2*b))) + f*(x/2)]^(2*n), x], x] /; FreeQ[{a, b, c, d, e, f, m}, x] && EqQ[a^2 - b^2, 0] && IntegerQ[n] && (GtQ[n, 0] || IGtQ[m, 0])
```

Rule 3556

```
Int[tan[(c_.) + (d_.)*(x_)], x_Symbol] :> Simp[-Log[RemoveContent[Cos[c + d*x], x]]/d, x] /; FreeQ[{c, d}, x]
```

Rule 4269

```
Int[csc[(e_.) + (f_.)*(x_)]^2*((c_.) + (d_.)*(x_))^(m_.), x_Symbol] :> Simp[(-(c + d*x)^m)*(Cot[e + f*x]/f), x] + Dist[d*(m/f), Int[(c + d*x)^(m - 1)*Cot[e + f*x], x] /; FreeQ[{c, d, e, f}, x] && GtQ[m, 0]
```

Rule 4276

```
Int[(csc[(e_.) + (f_.)*(x_)]*(b_.) + (a_.))^(n_.)*((c_.) + (d_.)*(x_))^(m_.), x_Symbol] :> Int[ExpandIntegrand[(c + d*x)^m, 1/(Sin[e + f*x]^n/(b + a*Si
```

```
n[e + f*x])^n, x] /; FreeQ[{a, b, c, d, e, f}, x] && ILtQ[n, 0] && IGtQ[m, 0]
```

Rubi steps

$$\begin{aligned}
\int \frac{c+dx}{a+a \sec(e+fx)} dx &= \int \left(\frac{c+dx}{a} - \frac{c+dx}{a+a \cos(e+fx)} \right) dx \\
&= \frac{(c+dx)^2}{2ad} - \int \frac{c+dx}{a+a \cos(e+fx)} dx \\
&= \frac{(c+dx)^2}{2ad} - \frac{\int (c+dx) \csc^2(\frac{e+\pi}{2} + \frac{fx}{2}) dx}{2a} \\
&= \frac{(c+dx)^2}{2ad} - \frac{(c+dx) \tan(\frac{e}{2} + \frac{fx}{2})}{af} + \frac{d \int \tan(\frac{e}{2} + \frac{fx}{2}) dx}{af} \\
&= \frac{(c+dx)^2}{2ad} - \frac{2d \log(\cos(\frac{e}{2} + \frac{fx}{2}))}{af^2} - \frac{(c+dx) \tan(\frac{e}{2} + \frac{fx}{2})}{af}
\end{aligned}$$

Mathematica [A]

time = 0.71, size = 104, normalized size = 1.55

$$\frac{\cos(\frac{1}{2}(e+fx)) \sec(e+fx) (-2f(c+dx) \sec(\frac{e}{2}) \sin(\frac{fx}{2}) + \cos(\frac{1}{2}(e+fx)) (f^2x(2c+dx) - 4d \log(\cos(\frac{1}{2}(e+fx))) - 2dfx \tan(\frac{e}{2})))}{af^2(1+\sec(e+fx))}$$

Antiderivative was successfully verified.

[In] `Integrate[(c + d*x)/(a + a*Sec[e + f*x]), x]`

[Out] `(Cos[(e + f*x)/2]*Sec[e + f*x]*(-2*f*(c + d*x)*Sec[e/2]*Sin[(f*x)/2] + Cos[(e + f*x)/2]*(f^2*x*(2*c + d*x) - 4*d*Log[Cos[(e + f*x)/2]] - 2*d*f*x*Tan[e/2]))/(a*f^2*(1 + Sec[e + f*x]))`

Maple [A]

time = 0.39, size = 76, normalized size = 1.13

method	result	size
norman	$\frac{cx}{a} + \frac{dx^2}{2a} - \frac{c \tan(\frac{fx}{2} + \frac{e}{2})}{af} - \frac{dx \tan(\frac{fx}{2} + \frac{e}{2})}{af} + \frac{d \ln(1 + \tan^2(\frac{fx}{2} + \frac{e}{2}))}{af^2}$	76
risch	$\frac{dx^2}{2a} + \frac{cx}{a} + \frac{2idx}{af} + \frac{2ide}{af^2} - \frac{2i(dx+c)}{fa(e^{i(fx+e)}+1)} - \frac{2d \ln(e^{i(fx+e)}+1)}{af^2}$	87

Verification of antiderivative is not currently implemented for this CAS.

[In] `int((d*x+c)/(a+a*sec(f*x+e)), x, method=_RETURNVERBOSE)`

[Out] $c/a*x+1/2*d/a*x^2-c/a/f*tan(1/2*f*x+1/2*e)-d/a/f*x*tan(1/2*f*x+1/2*e)+d/a/f^2*ln(1+tan(1/2*f*x+1/2*e)^2)$

Maxima [B] Leaf count of result is larger than twice the leaf count of optimal. 300 vs. 2(59) = 118.

time = 0.53, size = 300, normalized size = 4.48

$$\frac{2 d \left(\frac{2 \arctan\left(\frac{\sin(f x+e)}{\cos(f x+e)+1}\right)}{a f} - \frac{\sin(f x+e)}{a f (\cos(f x+e)+1)} \right) e - 2 c \left(\frac{2 \arctan\left(\frac{\sin(f x+e)}{a}\right)}{a} - \frac{\sin(f x+e)}{a (\cos(f x+e)+1)} \right) - \frac{\left((f x+e)^2 \cos(f x+e)^2 + 2 (f x+e)^2 \sin(f x+e) + (f x+e)^2 - 2 (\cos(f x+e)^2 + 2 \sin(f x+e)^2 + 2 \cos(f x+e) + 1) \log(\cos(f x+e)^2 + \sin(f x+e)^2 + 2 \cos(f x+e) + 1) - 4 (f x+e) \sin(f x+e)\right) d}{2 f}$$

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate((d*x+c)/(a+a*sec(f*x+e)),x, algorithm="maxima")`

[Out] $-1/2*(2*d*(2*arctan(sin(f*x + e)/(cos(f*x + e) + 1))/(a*f) - sin(f*x + e)/(a*f*(cos(f*x + e) + 1)))*e - 2*c*(2*arctan(sin(f*x + e)/(cos(f*x + e) + 1))/a - sin(f*x + e)/(a*(cos(f*x + e) + 1))) - ((f*x + e)^2*cos(f*x + e)^2 + (f*x + e)^2*sin(f*x + e)^2 + 2*(f*x + e)^2*cos(f*x + e) + (f*x + e)^2 - 2*(c os(f*x + e)^2 + sin(f*x + e)^2 + 2*cos(f*x + e) + 1)*log(cos(f*x + e)^2 + sin(f*x + e)^2 + 2*cos(f*x + e) + 1) - 4*(f*x + e)*sin(f*x + e))*d/(a*f*cos(f*x + e)^2 + a*f*sin(f*x + e)^2 + 2*a*f*cos(f*x + e) + a*f))/f$

Fricas [A]

time = 3.19, size = 104, normalized size = 1.55

$$\frac{df^2 x^2 + 2 c f^2 x + (df^2 x^2 + 2 c f^2 x) \cos(f x + e) - 2 (d \cos(f x + e) + d) \log(\frac{1}{2} \cos(f x + e) + \frac{1}{2}) - 2 (df x + c f) \sin(f x + e)}{2 (a f^2 \cos(f x + e) + a f^2)}$$

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate((d*x+c)/(a+a*sec(f*x+e)),x, algorithm="fricas")`

[Out] $1/2*(d*f^2*x^2 + 2*c*f^2*x + (d*f^2*x^2 + 2*c*f^2*x)*cos(f*x + e) - 2*(d*cos(f*x + e) + d)*log(1/2*cos(f*x + e) + 1/2) - 2*(d*f*x + c*f)*sin(f*x + e))/(a*f^2*cos(f*x + e) + a*f^2)$

Sympy [F]

time = 0.00, size = 0, normalized size = 0.00

$$\frac{\int \frac{c}{\sec(e+fx)+1} dx + \int \frac{dx}{\sec(e+fx)+1}}{a}$$

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate((d*x+c)/(a+a*sec(f*x+e)),x)`

[Out] `(Integral(c/(\sec(e + f*x) + 1), x) + Integral(d*x/(\sec(e + f*x) + 1), x))/a`

Giac [B] Leaf count of result is larger than twice the leaf count of optimal. 274 vs. 2(57) = 114.

time = 0.48, size = 274, normalized size = 4.09

$$\frac{df^2 x^2 \tan(\frac{1}{2} f x) \tan(\frac{1}{2} e) + 2 c f^2 x \tan(\frac{1}{2} f x) \tan(\frac{1}{2} e) - df^2 x^2 - 2 c f^2 x + 2 d f x \tan(\frac{1}{2} f x) + 2 d f x \tan(\frac{1}{2} e) - 2 d \log\left(\frac{4 (\tan(\frac{1}{2} f x)^4 \tan(\frac{1}{2} e)^4 - 2 \tan(\frac{1}{2} f x)^2 \tan(\frac{1}{2} e)^2 \tan(\frac{1}{2} f x)^2 \tan(\frac{1}{2} e)^2 + \tan(\frac{1}{2} f x)^4 \tan(\frac{1}{2} e)^2 + \tan(\frac{1}{2} f x)^2 \tan(\frac{1}{2} e)^4)}{\tan(\frac{1}{2} f x)^4 + 1}\right) \tan(\frac{1}{2} f x) \tan(\frac{1}{2} e) + 2 c f f \tan(\frac{1}{2} f x) + 2 c f \tan(\frac{1}{2} e) + 2 d \log\left(\frac{4 (\tan(\frac{1}{2} f x)^4 \tan(\frac{1}{2} e)^4 - 2 \tan(\frac{1}{2} f x)^2 \tan(\frac{1}{2} e)^2 \tan(\frac{1}{2} f x)^2 \tan(\frac{1}{2} e)^2 + \tan(\frac{1}{2} f x)^4 \tan(\frac{1}{2} e)^2 + \tan(\frac{1}{2} f x)^2 \tan(\frac{1}{2} e)^4)}{\tan(\frac{1}{2} f x)^4 + 1}\right) \tan(\frac{1}{2} f x) \tan(\frac{1}{2} e) - a f^2}{2 (a f^2 \tan(\frac{1}{2} f x) \tan(\frac{1}{2} e) - a f^2)}$$

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)/(a+a*sec(f*x+e)),x, algorithm="giac")
[Out] 1/2*(d*f^2*x^2*tan(1/2*f*x)*tan(1/2*e) + 2*c*f^2*x*tan(1/2*f*x)*tan(1/2*e)
- d*f^2*x^2 - 2*c*f^2*x + 2*d*f*x*tan(1/2*f*x) + 2*d*f*x*tan(1/2*e) - 2*d*l
og(4*(tan(1/2*f*x)^4*tan(1/2*e)^2 - 2*tan(1/2*f*x)^3*tan(1/2*e) + tan(1/2*f
*x)^2*tan(1/2*e)^2 + tan(1/2*f*x)^2 - 2*tan(1/2*f*x)*tan(1/2*e) + 1)/(tan(1
/2*e)^2 + 1))*tan(1/2*f*x)*tan(1/2*e) + 2*c*f*tan(1/2*f*x) + 2*c*f*tan(1/2*
e) + 2*d*log(4*(tan(1/2*f*x)^4*tan(1/2*e)^2 - 2*tan(1/2*f*x)^3*tan(1/2*e) +
tan(1/2*f*x)^2*tan(1/2*e)^2 + tan(1/2*f*x)^2 - 2*tan(1/2*f*x)*tan(1/2*e) +
1)/(tan(1/2*e)^2 + 1)))/(a*f^2*tan(1/2*f*x)*tan(1/2*e) - a*f^2)
```

Mupad [B]

time = 0.76, size = 79, normalized size = 1.18

$$\frac{dx^2}{2a} - \frac{2d \ln(e^{e^{1i}} e^{f x^{1i}} + 1)}{a f^2} - \frac{(c + dx) 2i}{a f (e^{e^{1i}+f x^{1i}} + 1)} + \frac{x (c f + d 2i)}{a f}$$

Verification of antiderivative is not currently implemented for this CAS.

```
[In] int((c + d*x)/(a + a/cos(e + f*x)),x)
[Out] (d*x^2)/(2*a) - (2*d*log(exp(e*1i)*exp(f*x*1i) + 1))/(a*f^2) - ((c + d*x)*2
i)/(a*f*(exp(e*1i + f*x*1i) + 1)) + (x*(d*2i + c*f))/(a*f)
```

3.14 $\int \frac{1}{(c+dx)(a+a \sec(e+fx))} dx$

Optimal. Leaf size=23

$$\text{Int}\left(\frac{1}{(c+dx)(a+a \sec(e+fx))}, x\right)$$

[Out] Unintegrable(1/(d*x+c)/(a+a*sec(f*x+e)),x)

Rubi [A]

time = 0.04, antiderivative size = 0, normalized size of antiderivative = 0.00, number of steps used = 0, number of rules used = 0, integrand size = 0, $\frac{\text{number of rules}}{\text{integrand size}} = 0.000$, Rules used = {}

$$\int \frac{1}{(c+dx)(a+a \sec(e+fx))} dx$$

Verification is not applicable to the result.

[In] Int[1/((c + d*x)*(a + a*Sec[e + f*x])),x]

[Out] Defer[Int][1/((c + d*x)*(a + a*Sec[e + f*x])), x]

Rubi steps

$$\int \frac{1}{(c+dx)(a+a \sec(e+fx))} dx = \int \frac{1}{(c+dx)(a+a \sec(e+fx))} dx$$

Mathematica [A]

time = 7.31, size = 0, normalized size = 0.00

$$\int \frac{1}{(c+dx)(a+a \sec(e+fx))} dx$$

Verification is not applicable to the result.

[In] Integrate[1/((c + d*x)*(a + a*Sec[e + f*x])),x]

[Out] Integrate[1/((c + d*x)*(a + a*Sec[e + f*x])), x]

Maple [A]

time = 0.30, size = 0, normalized size = 0.00

$$\int \frac{1}{(dx+c)(a+a \sec(fx+e))} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\int \frac{1}{(d*x+c)/(a+a*\sec(f*x+e))} dx$

[Out] $\int \frac{1}{(d*x+c)/(a+a*\sec(f*x+e))} dx$

Maxima [A]

time = 0.00, size = 0, normalized size = 0.00

Failed to integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}(1/(d*x+c)/(a+a*\sec(f*x+e)), x, \text{algorithm}=\text{"maxima"})$

[Out]
$$\begin{aligned} & ((d*f*x + c*f)*\cos(f*x + e)^2*\log(d*x + c) + (d*f*x + c*f)*\log(d*x + c)*\sin(f*x + e)^2 + 2*(d*f*x + c*f)*\cos(f*x + e)*\log(d*x + c) - 2*(a*d^3*f*x + a*c*d^2*f + (a*d^3*f*x + a*c*d^2*f)*\cos(f*x + e)^2 + (a*d^3*f*x + a*c*d^2*f)*\sin(f*x + e)^2 + 2*(a*d^3*f*x + a*c*d^2*f)*\cos(f*x + e))*\text{integrate}(\sin(f*x + e)/(a*d^2*f*x^2 + 2*a*c*d*f*x + a*c^2*f + (a*d^2*f*x^2 + 2*a*c*d*f*x + a*c^2*f)*\cos(f*x + e)^2 + (a*d^2*f*x^2 + 2*a*c*d*f*x + a*c^2*f)*\sin(f*x + e)^2 + 2*(a*d^2*f*x^2 + 2*a*c*d*f*x + a*c^2*f)*\cos(f*x + e)), x) + (d*f*x + c*f)*\log(d*x + c) - 2*d*\sin(f*x + e))/(a*d^2*f*x + a*c*d*f + (a*d^2*f*x + a*c*d*f)*\cos(f*x + e)^2 + (a*d^2*f*x + a*c*d*f)*\sin(f*x + e)^2 + 2*(a*d^2*f*x + a*c*d*f)*\cos(f*x + e)) \end{aligned}$$

Fricas [A]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}(1/(d*x+c)/(a+a*\sec(f*x+e)), x, \text{algorithm}=\text{"fricas"})$

[Out] $\text{integral}(1/(a*d*x + a*c + (a*d*x + a*c)*\sec(f*x + e)), x)$

Sympy [A]

time = 0.00, size = 0, normalized size = 0.00

$$\frac{\int \frac{1}{c\sec(e+fx)+c+dx\sec(e+fx)+dx} dx}{a}$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}(1/(d*x+c)/(a+a*\sec(f*x+e)), x)$

[Out] $\text{Integral}(1/(c*\sec(e + f*x) + c + d*x*\sec(e + f*x) + d*x), x)/a$

Giac [A]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate(1/(d*x+c)/(a+a*sec(f*x+e)),x, algorithm="giac")`

[Out] `integrate(1/((d*x + c)*(a*sec(f*x + e) + a)), x)`

Mupad [A]

time = 0.00, size = -1, normalized size = -0.04

$$\int \frac{1}{\left(a + \frac{a}{\cos(e+fx)}\right) (c + dx)} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] `int(1/((a + a/cos(e + f*x))*(c + d*x)),x)`

[Out] `int(1/((a + a/cos(e + f*x))*(c + d*x)), x)`

3.15 $\int \frac{1}{(c+dx)^2(a+a \sec(e+fx))} dx$

Optimal. Leaf size=23

$$\text{Int}\left(\frac{1}{(c+dx)^2(a+a \sec(e+fx))}, x\right)$$

[Out] Unintegrable($1/(d*x+c)^2/(a+a*\sec(f*x+e))$, x)

Rubi [A]

time = 0.04, antiderivative size = 0, normalized size of antiderivative = 0.00, number of steps used = 0, number of rules used = 0, integrand size = 0, $\frac{\text{number of rules}}{\text{integrand size}}$ = 0.000, Rules used = {}

$$\int \frac{1}{(c+dx)^2(a+a \sec(e+fx))} dx$$

Verification is not applicable to the result.

[In] Int[$1/((c+d*x)^2*(a+a*\text{Sec}[e+f*x]))$, x]

[Out] Defer[Int][$1/((c+d*x)^2*(a+a*\text{Sec}[e+f*x]))$, x]

Rubi steps

$$\int \frac{1}{(c+dx)^2(a+a \sec(e+fx))} dx = \int \frac{1}{(c+dx)^2(a+a \sec(e+fx))} dx$$

Mathematica [A]

time = 5.31, size = 0, normalized size = 0.00

$$\int \frac{1}{(c+dx)^2(a+a \sec(e+fx))} dx$$

Verification is not applicable to the result.

[In] Integrate[$1/((c+d*x)^2*(a+a*\text{Sec}[e+f*x]))$, x]

[Out] Integrate[$1/((c+d*x)^2*(a+a*\text{Sec}[e+f*x]))$, x]

Maple [A]

time = 0.26, size = 0, normalized size = 0.00

$$\int \frac{1}{(dx+c)^2(a+a \sec(fx+e))} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\int \frac{1}{(dx+c)^2(a+a\sec(fx+e))} dx$

[Out] $\int \frac{1}{(dx+c)^2(a+a\sec(fx+e))} dx$

Maxima [A]

time = 0.00, size = 0, normalized size = 0.00

Failed to integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}\left(\frac{1}{(dx+c)^2(a+a\sec(fx+e))}, x, \text{algorithm}=\text{"maxima"}\right)$

[Out]
$$\begin{aligned} & - (d^2 f x + (d^2 f x + c^2 f) \cos(f x + e))^2 + (d^2 f x + c^2 f) \sin(f x + e)^2 + c^2 f \\ & + 2(d^2 f x + c^2 f) \cos(f x + e) + 4(a d^4 f x^2 + 2 a c d^3 f x + a c^2 d^2 f^2 \\ & + (a d^4 f x^2 + 2 a c d^3 f x + a c^2 d^2 f^2) \cos(f x + e)^2 + (a d^4 f x^2 \\ & + 2 a c d^3 f x + a c^2 d^2 f^2) \sin(f x + e)^2 + 2(a d^4 f x^2 + 2 a c d^3 f x \\ & + a c^2 d^2 f^2) \cos(f x + e)) * \text{integrate}(\sin(f x + e) / (a d^3 f x^3 + \\ & 3 a c d^2 f x^2 + 3 a c^2 d f x + a c^3 f + (a d^3 f x^3 + 3 a c d^2 f x^2 \\ & + 3 a c^2 d f x + a c^3 f) \cos(f x + e)^2 + (a d^3 f x^3 + 3 a c d^2 f x^2 \\ & + 3 a c^2 d f x + a c^3 f) \sin(f x + e)^2 + 2(a d^3 f x^3 + 3 a c d^2 f x \\ & + 3 a c^2 d f x + a c^3 f) \cos(f x + e)), x) + 2 d \sin(f x + e) / (a d^3 f x^2 + 2 a c d^2 f x + a c^2 d f^2 \\ & + (a d^3 f x^2 + 2 a c d^2 f x + a c^2 d f^2) \cos(f x + e)^2 + (a d^3 f x^2 + 2 a c d^2 f x + a c^2 d f^2) \sin(f x + e)^2 \\ & + 2(a d^3 f x^2 + 2 a c d^2 f x + a c^2 d f^2) \cos(f x + e)) \end{aligned}$$

Fricas [A]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}\left(\frac{1}{(dx+c)^2(a+a\sec(fx+e))}, x, \text{algorithm}=\text{"fricas"}\right)$

[Out] $\text{integral}\left(\frac{1}{(a d^2 x^2 + 2 a c d x + a c^2 + (a d^2 x^2 + 2 a c d x + a c^2) \sec(f x + e))}, x\right)$

Sympy [A]

time = 0.00, size = 0, normalized size = 0.00

$$\frac{\int \frac{1}{c^2 \sec(e+fx)+c^2+2cdx \sec(e+fx)+2cdx+d^2x^2 \sec(e+fx)+d^2x^2} dx}{a}$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}\left(\frac{1}{(dx+c)^2(a+a\sec(fx+e))}, x\right)$

[Out] $\text{Integral}\left(\frac{1}{(c^{**2} \sec(e+fx) + c^{**2} + 2 c d x \sec(e+fx) + 2 c d x + d^{**2} x^{**2} \sec(e+fx) + d^{**2} x^{**2})}, x\right)/a$

Giac [A]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate(1/(d*x+c)^2/(a+a*sec(f*x+e)),x, algorithm="giac")`

[Out] `integrate(1/((d*x + c)^2*(a*sec(f*x + e) + a)), x)`

Mupad [A]

time = 0.00, size = -1, normalized size = -0.04

$$\int \frac{1}{\left(a + \frac{a}{\cos(e+fx)}\right) (c + dx)^2} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] `int(1/((a + a/cos(e + f*x))*(c + d*x)^2),x)`

[Out] `int(1/((a + a/cos(e + f*x))*(c + d*x)^2), x)`

3.16 $\int \frac{(c+dx)^3}{(a+a \sec(e+fx))^2} dx$

Optimal. Leaf size=288

$$\frac{5i(c+dx)^3}{3a^2f} + \frac{(c+dx)^4}{4a^2d} - \frac{10d(c+dx)^2 \log(1+e^{i(e+fx)})}{a^2f^2} + \frac{4d^3 \log(\cos(\frac{e}{2} + \frac{fx}{2}))}{a^2f^4} + \frac{20id^2(c+dx)\text{PolyLog}(2, \frac{c+dx}{a})}{a^2f^3}$$

[Out] $5/3*I*(d*x+c)^3/a^2/f+1/4*(d*x+c)^4/a^2/d-10*d*(d*x+c)^2*\ln(1+\exp(I*(f*x+e)))/a^2/f^2+4*d^3*\ln(\cos(1/2*f*x+1/2*e))/a^2/f^4+20*I*d^2*(d*x+c)*\text{polylog}(2, -\exp(I*(f*x+e)))/a^2/f^3-20*d^3*\text{polylog}(3, -\exp(I*(f*x+e)))/a^2/f^4-1/2*d*(d*x+c)^2*\sec(1/2*f*x+1/2*e)^2/a^2/f^2+2*d^2*(d*x+c)*\tan(1/2*f*x+1/2*e)/a^2/f^3-5/3*(d*x+c)^3*\tan(1/2*f*x+1/2*e)/a^2/f+6*(d*x+c)^3*\sec(1/2*f*x+1/2*e)^2*\tan(1/2*f*x+1/2*e)/a^2/f$

Rubi [A]

time = 0.49, antiderivative size = 288, normalized size of antiderivative = 1.00, number of steps used = 19, number of rules used = 10, integrand size = 20, $\frac{\text{number of rules}}{\text{integrand size}} = 0.500$, Rules used = {4276, 3399, 4271, 4269, 3556, 3800, 2221, 2611, 2320, 6724}

$$\frac{20id^2(c+dx)\text{Li}_2(-e^{i(e+fx)})}{a^2f^3} + \frac{2d^2(c+dx)\tan(\frac{e}{2} + \frac{fx}{2})}{a^2f^3} - \frac{10d(c+dx)^2 \log(1+e^{i(e+fx)})}{a^2f^2} - \frac{d(c+dx)^2 \sec^2(\frac{e}{2} + \frac{fx}{2})}{2a^2f^2} - \frac{5(c+dx)^3 \tan(\frac{e}{2} + \frac{fx}{2})}{3a^2f} + \frac{(c+dx)^3 \tan(\frac{e}{2} + \frac{fx}{2}) \sec^2(\frac{e}{2} + \frac{fx}{2})}{6a^2f} + \frac{5i(c+dx)^3}{3a^2f} + \frac{(c+dx)^4}{4a^2d} - \frac{20d^2\text{Li}_3(-e^{i(e+fx)})}{a^2f^4} + \frac{4d^3 \log(\cos(\frac{e}{2} + \frac{fx}{2}))}{a^2f^4}$$

Antiderivative was successfully verified.

[In] $\text{Int}[(c + d*x)^3/(a + a*\text{Sec}[e + f*x])^2, x]$

[Out] $((5*I)/3)*(c + d*x)^3/(a^2*f) + (c + d*x)^4/(4*a^2*d) - (10*d*(c + d*x)^2 * \text{Log}[1 + E^{(I*(e + f*x))}])/a^2*f^2 + (4*d^3*\text{Log}[\text{Cos}[e/2 + (f*x)/2]])/(a^2*f^4) + ((20*I)*d^2*(c + d*x)*\text{PolyLog}[2, -E^{(I*(e + f*x))}])/a^2*f^3 - (20*d^3*\text{PolyLog}[3, -E^{(I*(e + f*x))}])/a^2*f^4 - (d*(c + d*x)^2*\text{Sec}[e/2 + (f*x)/2]^2)/(2*a^2*f^2) + (2*d^2*(c + d*x)*\text{Tan}[e/2 + (f*x)/2])/a^2*f^3 - (5*(c + d*x)^3*\text{Tan}[e/2 + (f*x)/2])/(3*a^2*f) + ((c + d*x)^3*\text{Sec}[e/2 + (f*x)/2]^2*\text{Tan}[e/2 + (f*x)/2])/(6*a^2*f)$

Rule 2221

```
Int[((F_)^((g_.)*(e_.) + (f_.)*(x_.)))^(n_.)*((c_.) + (d_.)*(x_.)^(m_.))/((a_) + (b_.)*(F_)^((g_.)*(e_.) + (f_.)*(x_.))))^(n_), x_Symbol] :> Simplify[((c + d*x)^m/(b*f*g*n*Log[F]))*Log[1 + b*((F^(g*(e + f*x)))^n/a)], x] - Dist[d*(m/(b*f*g*n*Log[F])), Int[(c + d*x)^(m - 1)*Log[1 + b*((F^(g*(e + f*x)))^n/a)], x], x] /; FreeQ[{F, a, b, c, d, e, f, g, n}, x] && IGtQ[m, 0]
```

Rule 2320

```
Int[u_, x_Symbol] :> With[{v = FunctionOfExponential[u, x]}, Dist[v/D[v, x], Subst[Int[FunctionOfExponentialFunction[u, x]/x, x], x, v], x]] /; FunctionOfExponentialQ[u, x] && !MatchQ[u, (w_)*((a_)*(v_)^(n_))^(m_)] /; FreeQ[{a, m, n}, x] && IntegerQ[m*n]] && !MatchQ[u, E^((c_)*((a_)+(b_)*x))*
```

```
(F_)[v_] /; FreeQ[{a, b, c}, x] && InverseFunctionQ[F[x]]]
```

Rule 2611

```
Int[Log[1 + (e_)*(F_)^((c_.)*(a_.) + (b_)*(x_)))^(n_.)]*((f_.) + (g_.)*(x_))^(m_), x_Symbol] :> Simplify[(-(f + g*x)^m)*(PolyLog[2, (-e)*(F^(c*(a + b*x)))^n]/(b*c*n*Log[F])), x] + Dist[g*(m/(b*c*n*Log[F])), Int[(f + g*x)^(m - 1)*PolyLog[2, (-e)*(F^(c*(a + b*x)))^n], x], x] /; FreeQ[{F, a, b, c, e, f, g, n}, x] && GtQ[m, 0]
```

Rule 3399

```
Int[((c_.) + (d_)*(x_))^(m_)*(a_ + (b_)*sin[(e_.) + (f_)*(x_)])^(n_.), x_Symbol] :> Dist[(2*a)^n, Int[(c + d*x)^m*Sin[(1/2)*(e + Pi*(a/(2*b))) + f*(x/2)]^(2*n), x], x] /; FreeQ[{a, b, c, d, e, f, m}, x] && EqQ[a^2 - b^2, 0] && IntegerQ[n] && (GtQ[n, 0] || IGtQ[m, 0])
```

Rule 3556

```
Int[tan[(c_.) + (d_)*(x_)], x_Symbol] :> Simplify[-Log[RemoveContent[Cos[c + d*x]], x]]/d, x] /; FreeQ[{c, d}, x]
```

Rule 3800

```
Int[((c_.) + (d_)*(x_))^(m_)*tan[(e_.) + (f_)*(x_)], x_Symbol] :> Simplify[I*((c + d*x)^(m + 1)/(d*(m + 1))), x] - Dist[2*I, Int[(c + d*x)^m*(E^(2*I*(e + f*x))/(1 + E^(2*I*(e + f*x)))), x], x] /; FreeQ[{c, d, e, f}, x] && IGtQ[m, 0]
```

Rule 4269

```
Int[csc[(e_.) + (f_)*(x_)]^2*((c_.) + (d_)*(x_))^(m_.), x_Symbol] :> Simplify[(-(c + d*x)^m)*(Cot[e + f*x]/f), x] + Dist[d*(m/f), Int[(c + d*x)^(m - 1)*Cot[e + f*x], x], x] /; FreeQ[{c, d, e, f}, x] && GtQ[m, 0]
```

Rule 4271

```
Int[(csc[(e_.) + (f_)*(x_)]*(b_.))^n*((c_.) + (d_)*(x_))^(m_), x_Symbol] :> Simplify[(-b^2)*(c + d*x)^m*Cot[e + f*x]*((b*Csc[e + f*x])^(n - 2)/(f*(n - 1))), x] + (Dist[b^2*d^2*m*((m - 1)/(f^2*(n - 1)*(n - 2))), Int[(c + d*x)^(m - 2)*(b*Csc[e + f*x])^(n - 2), x], x] + Dist[b^2*((n - 2)/(n - 1)), Int[(c + d*x)^m*(b*Csc[e + f*x])^(n - 2), x], x] - Simplify[b^2*d*m*(c + d*x)^(m - 1)*((b*Csc[e + f*x])^(n - 2)/(f^2*(n - 1)*(n - 2))), x]) /; FreeQ[{b, c, d, e, f}, x] && GtQ[n, 1] && NeQ[n, 2] && GtQ[m, 1]
```

Rule 4276

```
Int[(csc[(e_.) + (f_.*(x_)]*(b_.) + (a_.))^n_.)*((c_.) + (d_.*(x_))^(m_.))
, x_Symbol] :> Int[ExpandIntegrand[(c + d*x)^m, 1/(Sin[e + f*x]^n/(b + a*Si
n[e + f*x])^n), x], x] /; FreeQ[{a, b, c, d, e, f}, x] && ILtQ[n, 0] && IGt
Q[m, 0]
```

Rule 6724

```
Int[PolyLog[n_, (c_.)*(a_.) + (b_.)*(x_))^(p_.)]/((d_.) + (e_.*(x_)), x_S
ymbol] :> Simp[PolyLog[n + 1, c*(a + b*x)^p]/(e*p), x] /; FreeQ[{a, b, c, d
, e, n, p}, x] && EqQ[b*d, a*e]
```

Rubi steps

$$\begin{aligned}
\int \frac{(c+dx)^3}{(a+a \sec(e+fx))^2} dx &= \int \left(\frac{(c+dx)^3}{a^2} + \frac{(c+dx)^3}{a^2(1+\cos(e+fx))^2} - \frac{2(c+dx)^3}{a^2(1+\cos(e+fx))} \right) dx \\
&= \frac{(c+dx)^4}{4a^2d} + \frac{\int \frac{(c+dx)^3}{(1+\cos(e+fx))^2} dx}{a^2} - \frac{2 \int \frac{(c+dx)^3}{1+\cos(e+fx)} dx}{a^2} \\
&= \frac{(c+dx)^4}{4a^2d} + \frac{\int (c+dx)^3 \csc^4(\frac{e+\pi}{2} + \frac{fx}{2}) dx}{4a^2} - \frac{\int (c+dx)^3 \csc^2(\frac{e+\pi}{2} + \frac{fx}{2}) dx}{a^2} \\
&= \frac{(c+dx)^4}{4a^2d} - \frac{d(c+dx)^2 \sec^2(\frac{e}{2} + \frac{fx}{2})}{2a^2f^2} - \frac{2(c+dx)^3 \tan(\frac{e}{2} + \frac{fx}{2})}{a^2f} + \frac{(c+dx)^3 s}{a^2f} \\
&= \frac{2i(c+dx)^3}{a^2f} + \frac{(c+dx)^4}{4a^2d} - \frac{d(c+dx)^2 \sec^2(\frac{e}{2} + \frac{fx}{2})}{2a^2f^2} + \frac{2d^2(c+dx) \tan(\frac{e}{2} + \frac{fx}{2})}{a^2f^3} \\
&= \frac{5i(c+dx)^3}{3a^2f} + \frac{(c+dx)^4}{4a^2d} - \frac{12d(c+dx)^2 \log(1+e^{i(e+fx)})}{a^2f^2} + \frac{4d^3 \log(\cos(\frac{e}{2} + \frac{fx}{2}))}{a^2f^4} \\
&= \frac{5i(c+dx)^3}{3a^2f} + \frac{(c+dx)^4}{4a^2d} - \frac{10d(c+dx)^2 \log(1+e^{i(e+fx)})}{a^2f^2} + \frac{4d^3 \log(\cos(\frac{e}{2} + \frac{fx}{2}))}{a^2f^4} \\
&= \frac{5i(c+dx)^3}{3a^2f} + \frac{(c+dx)^4}{4a^2d} - \frac{10d(c+dx)^2 \log(1+e^{i(e+fx)})}{a^2f^2} + \frac{4d^3 \log(\cos(\frac{e}{2} + \frac{fx}{2}))}{a^2f^4} \\
&= \frac{5i(c+dx)^3}{3a^2f} + \frac{(c+dx)^4}{4a^2d} - \frac{10d(c+dx)^2 \log(1+e^{i(e+fx)})}{a^2f^2} + \frac{4d^3 \log(\cos(\frac{e}{2} + \frac{fx}{2}))}{a^2f^4}
\end{aligned}$$

Mathematica [B] Both result and optimal contain complex but leaf count is larger than twice the leaf count of optimal. 1455 vs. 2(288) = 576.

time = 7.19, size = 1455, normalized size = 5.05

Warning: Unable to verify antiderivative.

```
[In] Integrate[(c + d*x)^3/(a + a*Sec[e + f*x])^2,x]
[Out] (20*d^3*Cos[e/2 + (f*x)/2]^4*(I*f^2*x^2*(E^(I*e)*f*x + (3*I)*(1 + E^(I*e))*Log[1 + E^(I*(e + f*x))]) + (6*I)*(1 + E^(I*e))*f*x*PolyLog[2, -E^(I*(e + f*x))) - 6*(1 + E^(I*e))*PolyLog[3, -E^(I*(e + f*x))])*Sec[e/2]*Sec[e + f*x]^2)/(3*E^((I/2)*e)*f^4*(a + a*Sec[e + f*x])^2) + (16*d^3*Cos[e/2 + (f*x)/2]^4*Sec[e/2]*Sec[e + f*x]^2*(Cos[e/2]*Log[Cos[e/2]*Cos[(f*x)/2] - Sin[e/2]*Sin[(f*x)/2]] + (f*x*Sin[e/2])/2))/(f^4*(a + a*Sec[e + f*x])^2*(Cos[e/2]^2 + Sin[e/2]^2)) - (40*c^2*d*Cos[e/2 + (f*x)/2]^4*Sec[e/2]*Sec[e + f*x]^2*(Cos[e/2]*Log[Cos[e/2]*Cos[(f*x)/2] - Sin[e/2]*Sin[(f*x)/2]] + (f*x*Sin[e/2])/2))/(f^2*(a + a*Sec[e + f*x])^2*(Cos[e/2]^2 + Sin[e/2]^2)) - (80*c*d^2*Cos[e/2 + (f*x)/2]^4*Csc[e/2]*((f^2*x^2)/(4*E^(I*ArcTan[Cot[e/2]]))) - (Cot[e/2]*((I/2)*f*x*(-Pi - 2*ArcTan[Cot[e/2]])) - Pi*Log[1 + E^((-I)*f*x)] - 2*((f*x)/2 - ArcTan[Cot[e/2]])*Log[1 - E^((2*I)*((f*x)/2 - ArcTan[Cot[e/2]]))] + Pi*Log[Cos[(f*x)/2]] - 2*ArcTan[Cot[e/2]]*Log[Sin[(f*x)/2 - ArcTan[Cot[e/2]]]] + I*PolyLog[2, E^((2*I)*((f*x)/2 - ArcTan[Cot[e/2]]))])/Sqrt[1 + Cot[e/2]^2])*Sec[e/2]*Sec[e + f*x]^2)/(f^3*(a + a*Sec[e + f*x])^2*Sqrt[Csc[e/2]^2*(Cos[e/2]^2 + Sin[e/2]^2)]) + (Cos[e/2 + (f*x)/2]*Sec[e/2]*Sec[e + f*x]^2*(-24*c^2*d*f*Cos[(f*x)/2] - 48*c*d^2*f*x*Cos[(f*x)/2] + 36*c^3*f^3*x*Cos[(f*x)/2] - 24*d^3*f*x^2*Cos[(f*x)/2] + 54*c^2*d*f^3*x^2*Cos[(f*x)/2] + 36*c*d^2*f^3*x^3*Cos[(f*x)/2] + 9*d^3*f^3*x^4*Cos[(f*x)/2] - 24*c^2*d*f*Cos[e + (f*x)/2] - 48*c*d^2*f*x*Cos[e + (f*x)/2] + 36*c^3*f^3*x*Cos[e + (f*x)/2] - 24*d^3*f*x^2*Cos[e + (f*x)/2] + 54*c^2*d*f^3*x^2*Cos[e + (f*x)/2] + 36*c*d^2*f^3*x^3*Cos[e + (f*x)/2] + 9*d^3*f^3*x^4*Cos[e + (f*x)/2] + 12*c^3*f^3*x*Cos[e + (3*f*x)/2] + 18*c^2*d*f^3*x^2*Cos[e + (3*f*x)/2] + 12*c*d^2*f^3*x^3*Cos[2*e + (3*f*x)/2] + 18*c^2*d*f^3*x^2*Cos[2*e + (3*f*x)/2] + 12*c*d^2*f^3*x^3*Cos[2*e + (3*f*x)/2] + 3*d^3*f^3*x^4*Cos[2*e + (3*f*x)/2] + 96*c*d^2*Sin[(f*x)/2] - 72*c^3*f^2*Sin[(f*x)/2] + 96*d^3*x*Sin[(f*x)/2] - 216*c^2*d*f^2*x*Sin[(f*x)/2] - 216*c*d^2*f^2*x^2*Sin[(f*x)/2] - 72*d^3*f^2*x^3*Sin[(f*x)/2] - 48*c*d^2*Sin[e + (f*x)/2] + 48*c^3*f^2*Sin[e + (f*x)/2] - 48*d^3*x*Sin[e + (f*x)/2] + 144*c^2*d*f^2*x*Sin[e + (f*x)/2] + 144*c*d^2*f^2*x^2*Sin[e + (f*x)/2] + 48*d^3*f^2*x^3*Sin[e + (f*x)/2] + 48*c*d^2*Sin[e + (3*f*x)/2] - 40*c^3*f^2*Sin[e + (3*f*x)/2] + 48*d^3*x*Sin[e + (3*f*x)/2] - 120*c^2*d*f^2*x*Sin[e + (3*f*x)/2] - 120*c*d^2*f^2*x^2*Sin[e + (3*f*x)/2] - 40*d^3*f^2*x^3*Sin[e + (3*f*x)/2]))/(24*f^3*(a + a*Sec[e + f*x])^2)
```

Maple [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 809 vs. 2(246) = 492.

time = 0.80, size = 810, normalized size = 2.81

method	result
risch	$\frac{d^3x^4}{4a^2} + \frac{d^2cx^3}{a^2} + \frac{3dc^2x^2}{2a^2} + \frac{c^3x}{a^2} + \frac{c^4}{4a^2d} + \frac{10id^2cx^2}{a^2f} - \frac{20id^3e^3}{3a^2f^4} - \frac{2i(6d^3f^2x^3e^{2i(fx+e)} - 3ic^2df e^{i(fx+e)} + 18cd^2f^2x^2e^{2i(fx+e)})}{3a^2f^4}$

Verification of antiderivative is not currently implemented for this CAS.

```
[In] int((d*x+c)^3/(a+a*sec(f*x+e))^2,x,method=_RETURNVERBOSE)

[Out] 1/4/a^2*d^3*x^4+1/a^2*d^2*c*x^3+3/2/a^2*d*c^2*x^2+1/a^2*c^3*x+1/4/a^2/d*c^4
+10*I/a^2/f*d^2*c*x^2+20*I/a^2/f^3*d^3*polylog(2,-exp(I*(f*x+e)))*x-20/3*I/
a^2/f^4*d^3*e^3-2/3*I*(6*d^3*f^2*x^3*exp(2*I*(f*x+e))-3*I*c^2*d*f*exp(I*(f*x+e))+18*c*d^2*f^2*x^2*exp(2*I*(f*x+e))+9*d^3*f^2*x^3*exp(I*(f*x+e))-6*I*c*d^2*f*x*exp(I*(f*x+e))-3*I*d^3*f*x^2*exp(2*I*(f*x+e))+18*c^2*d*f^2*x*exp(2*I*(f*x+e))+27*c*d^2*f^2*x^2*exp(I*(f*x+e))+5*d^3*f^2*x^3-6*I*c*d^2*f*x*exp(2*I*(f*x+e))-3*I*c^2*d*f*exp(2*I*(f*x+e))+6*c^3*f^2*exp(2*I*(f*x+e))+27*c^2*d*f^2*x*exp(I*(f*x+e))+15*c*d^2*f^2*x^2-3*I*d^3*f*x^2*exp(I*(f*x+e))+9*c^3*f^2*exp(I*(f*x+e))+15*c^2*d*f^2*x-6*d^3*x*exp(2*I*(f*x+e))+5*c^3*f^2-6*d^2*c*exp(2*I*(f*x+e))-12*d^3*x*exp(I*(f*x+e))-12*d^2*c*exp(I*(f*x+e))-6*d^3*x-6*d^2*c)/f^3/a^2/(exp(I*(f*x+e))+1)^3+20*I/a^2/f^2*d^2*c*x-10/a^2/f^2*d^3*ln(exp(I*(f*x+e))+1)*x^2+10*I/a^2/f^3*d^2*c*x^2+10/3*I/a^2/f*d^3*x^3-20/a^2/f^2*d^2*ln(exp(I*(f*x+e))+1)*c*x-10*I/a^2/f^3*d^3*x^2+20*I/a^2/f^3*d^2*c*polylog(2,-exp(I*(f*x+e)))+4/a^2/f^4*d^3*ln(exp(I*(f*x+e))+1)-4/a^2/f^4*d^3*ln(exp(I*(f*x+e)))-20/a^2/f^3*d^2*c*ln(exp(I*(f*x+e)))-20*d^3*polylog(3,-exp(I*(f*x+e)))/a^2/f^4-10/a^2/f^2*d*c^2*ln(exp(I*(f*x+e))+1)+10/a^2/f^2*d*c^2*ln(exp(I*(f*x+e)))+10/a^2/f^4*d^3*x^2*ln(exp(I*(f*x+e)))
```

Maxima [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 4460 vs. $2(252) = 504$.

time = 1.79, size = 4460, normalized size = 15.49

Too large to display

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)^3/(a+a*sec(f*x+e))^2,x, algorithm="maxima")

[Out] -1/6*(3*c*d^2*((9*sin(f*x + e)/(cos(f*x + e) + 1) - sin(f*x + e)^3/(cos(f*x + e) + 1)^3)/(a^2*f^2) - 12*arctan(sin(f*x + e)/(cos(f*x + e) + 1))/(a^2*f^2)*e^2 - 3*c^2*d*((9*sin(f*x + e)/(cos(f*x + e) + 1) - sin(f*x + e)^3/(cos(f*x + e) + 1)^3)/(a^2*f) - 12*arctan(sin(f*x + e)/(cos(f*x + e) + 1))/(a^2*f))*e + c^3*((9*sin(f*x + e)/(cos(f*x + e) + 1) - sin(f*x + e)^3/(cos(f*x + e) + 1)^3)/(a^2) - 12*arctan(sin(f*x + e)/(cos(f*x + e) + 1))/a^2) + 6*(3*(f*x + e)^2*cos(3*f*x + 3*e)^2 + 3*(f*x + e)^2*sin(3*f*x + 3*e)^2 + 3*(9*(f*x + e)^2 - 4)*cos(2*f*x + 2*e)^2 + 3*(9*(f*x + e)^2 - 4)*cos(f*x + e)^2 + 3*(9*(f*x + e)^2 - 4)*sin(2*f*x + 2*e)^2 + 3*(9*(f*x + e)^2 - 4)*sin(f*x + e)^2 + 3*(f*x + e)^2 + 2*(3*(f*x + e)^2 + (9*(f*x + e)^2 - 2)*cos(2*f*x + 2)*sin(f*x + e)^2) + 2*(3*(f*x + e)^2 + (9*(f*x + e)^2 - 2)*sin(2*f*x + 2)*cos(f*x + e)^2))
```

$$\begin{aligned}
& *e) + (9*(f*x + e)^2 - 2)*cos(f*x + e) + 12*(f*x + e)*sin(2*f*x + 2*e) + 18 \\
& *(f*x + e)*sin(f*x + e))*cos(3*f*x + 3*e) + 2*(9*(f*x + e)^2 + 3*(9*(f*x + e)^2 - 4)*cos(f*x + e) + 18*(f*x + e)*sin(f*x + e) - 2)*cos(2*f*x + 2*e) + 2*(9*(f*x + e)^2 - 2)*cos(f*x + e) - 10*(2*(3*cos(2*f*x + 2*e) + 3*cos(f*x + e) + 1)*cos(3*f*x + 3*e) + cos(3*f*x + 3*e)^2 + 6*(3*cos(f*x + e) + 1)*cos(2*f*x + 2*e) + 9*cos(2*f*x + 2*e)^2 + 9*cos(f*x + e)^2 + 6*(sin(2*f*x + 2*e) + sin(f*x + e))*sin(3*f*x + 3*e) + sin(3*f*x + 3*e)^2 + 9*sin(2*f*x + 2*e)^2 + 18*sin(2*f*x + 2*e)*sin(f*x + e) + 9*sin(f*x + e)^2 + 6*cos(f*x + e) + 1)*log(cos(f*x + e)^2 + sin(f*x + e)^2 + 2*cos(f*x + e) + 1) - 2*(10*f*x + 12*(f*x + e)*cos(2*f*x + 2*e) + 18*(f*x + e)*cos(f*x + e) - (9*(f*x + e)^2 - 2)*sin(2*f*x + 2*e) - (9*(f*x + e)^2 - 2)*sin(f*x + e) + 10*e)*sin(3*f*x + 3*e) - 6*(6*f*x + 6*(f*x + e)*cos(f*x + e) - (9*(f*x + e)^2 - 4)*sin(f*x + e) + 6*e)*sin(2*f*x + 2*e) - 24*(f*x + e)*sin(f*x + e))*c*d^2*e/(a^2*f^2*cos(3*f*x + 3*e)^2 + 9*a^2*f^2*cos(2*f*x + 2*e)^2 + 9*a^2*f^2*cos(f*x + e)^2 + a^2*f^2*sin(3*f*x + 3*e)^2 + 9*a^2*f^2*sin(2*f*x + 2*e)^2 + 18*a^2*f^2*sin(2*f*x + 2*e)*sin(f*x + e) + 9*a^2*f^2*sin(f*x + e)^2 + 6*a^2*f^2*cos(f*x + e) + a^2*f^2 + 2*(3*a^2*f^2*cos(2*f*x + 2*e) + 3*a^2*f^2*cos(f*x + e) + a^2*f^2)*cos(3*f*x + 3*e) + 6*(3*a^2*f^2*cos(f*x + e) + a^2*f^2)*cos(2*f*x + 2*e) + 6*(a^2*f^2*sin(2*f*x + 2*e) + a^2*f^2*sin(f*x + e))*sin(3*f*x + 3*e)) - 3*(3*(f*x + e)^2*cos(3*f*x + 3*e)^2 + 3*(f*x + e)^2*sin(3*f*x + 3*e)^2 + 3*(9*(f*x + e)^2 - 4)*cos(2*f*x + 2*e)^2 + 3*(9*(f*x + e)^2 - 4)*sin(2*f*x + 2*e)^2 + 3*(9*(f*x + e)^2 - 4)*sin(f*x + e)^2 + 3*(f*x + e)^2 + 2*(3*(f*x + e)^2 + (9*(f*x + e)^2 - 2)*cos(2*f*x + 2*e) + (9*(f*x + e)^2 - 2)*cos(f*x + e) + 12*(f*x + e)*sin(2*f*x + 2*e) + 18*(f*x + e)*sin(f*x + e))*cos(3*f*x + 3*e) + 2*(9*(f*x + e)^2 + 3*(9*(f*x + e)^2 - 4)*cos(2*f*x + 2*e) + 18*(f*x + e)*sin(f*x + e) - 2)*cos(2*f*x + 2*e) + 2*(9*(f*x + e)^2 - 2)*cos(f*x + e) - 10*(2*(3*cos(2*f*x + 2*e) + 3*cos(f*x + e) + 1)*cos(3*f*x + 3*e) + cos(3*f*x + 3*e)^2 + 6*(3*cos(f*x + e) + 1)*cos(2*f*x + 2*e) + 9*cos(2*f*x + 2*e)^2 + 9*cos(f*x + e)^2 + 6*(sin(2*f*x + 2*e) + sin(f*x + e))*sin(3*f*x + 3*e) + sin(3*f*x + 3*e)^2 + 9*sin(2*f*x + 2*e)^2 + 18*sin(2*f*x + 2*e)*sin(f*x + e) + 9*sin(f*x + e)^2 + 6*cos(f*x + e) + 1)*log(cos(f*x + e)^2 + sin(f*x + e)^2 + 2*cos(f*x + e) + 1) - 2*(10*f*x + 12*(f*x + e)*cos(2*f*x + 2*e) + 18*(f*x + e)*cos(f*x + e) - (9*(f*x + e)^2 - 2)*sin(2*f*x + 2*e) - (9*(f*x + e)^2 - 2)*sin(f*x + e) + 10*e)*sin(3*f*x + 3*e) - 6*(6*f*x + 6*(f*x + e)*cos(f*x + e) - (9*(f*x + e)^2 - 4)*sin(f*x + e) + 6*e)*sin(2*f*x + 2*e) - 24*(f*x + e)*sin(f*x + e))*c^2*d/(a^2*f*cos(3*f*x + 3*e)^2 + 9*a^2*f*cos(2*f*x + 2*e)^2 + 9*a^2*f*cos(f*x + e)^2 + a^2*f*sin(3*f*x + 3*e)^2 + 9*a^2*f*sin(2*f*x + 2*e)^2 + 18*a^2*f*sin(2*f*x + 2*e)*sin(f*x + e) + 9*a^2*f*sin(f*x + e)^2 + 6*a^2*f*cos(f*x + e) + a^2*f + 2*(3*a^2*f*cos(2*f*x + 2*e) + 3*a^2*f*cos(f*x + e) + a^2*f)*cos(2*f*x + 2*e) + 6*(3*a^2*f*cos(f*x + e) + a^2*f)*cos(2*f*x + 2*e) + 6*(a^2*f*sin(2*f*x + 2*e) + a^2*f*sin(f*x + e))*sin(3*f*x + 3*e)) + 6*(3*I*(f*x + e)^4*d^3 + 18*I*(f*x + e)^2*d^3*e^2 - 12*I*(f*x + e)*d^3*e^3 - 12*(-I*c*d^2*f + I*d^3*e)*(f*x + e)^3 - 48*c*d^2*f - 8*d^3*(5*e^3 - 6*e) + 24*(5*(f*x + e)^2*d^3 + d^3*(5*e^2 - 2)) + 10*(c*d^2*f - d^3*e)*(f*x + e) + (5*(f*x + e)^2*d^3 + d^3*(5*e^2 - 2)) + 10*(c*d^2*f - d^3*e)*(f*x + e) + (5*(f*x + e)^2*d^3 + d^3*(5*e^2 - 2))
\end{aligned}$$

$$\begin{aligned} & *x + e)^{2*d^3} + d^{3*(5*e^2 - 2)} + 10*(c*d^2*f - d^3*e)*(f*x + e))*\cos(3*f*x \\ & + 3*e) + 3*(5*(f*x + e)^2*d^3 + d^{3*(5*e^2 - 2)} + 10*(c*d^2*f - d^3*e)*(f*x \\ & + e))*\cos(2*f*x + 2*e) + 3*(5*(f*x + e)^2*d^3 + d^{3*(5*e^2 - 2)} + 10*(c*d \\ & ^2*f - d^3*e)*(f*x + e))*\cos(f*x + e) - (-5*I*(f*x + e)^2*d^3 + d^{3*(-5*I*e \\ & ^2 + 2*I)} + 10*(-I*c*d^2*f + I*d^3*e)*(f*x + e))*\sin(3*f*x + 3*e) - 3*(-5*I \\ & *(f*x + e)^2*d^3 + d^{3*(-5*I*e^2 + 2*I)} + 10*(-I*c*d^2*f + I*d^3*e)*(f*x + e)) \\ & *\sin(2*f*x + 2*e) - 3*(-5*I*(f*x + e)^2*d^3 + d^{3*(-5*I*e^2 + 2*I)} + 10* \\ & (-I*c*d^2*f + I*d^3*e)*(f*x + e))*\sin(f*x + e)*\arctan2(\sin(f*x + e), \cos(f \\ & *x + e) + 1) + (3*I*(f*x + e)^4*d^3 - 12*(f*x + e)*d^3*(I*e^3 + 10*e^2 - 4) \\ & - 4*(-3*I*c*d^2*f + d^3*(3*I*e + 10))*(f*x + e)^3 - 6*(20*c*d^2*f + d^3*(- \\ & 3*I*e^2 - 20*e))*(f*x + e)^2)*\cos(3*f*x + 3*e) - 3*(-3*I*(f*x + e)^4*d^3 + \\ & 12*(-I*c*d^2*f + d^3*(I*e + 2))*(f*x + e)^3 + 1... \end{aligned}$$

Fricas [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 963 vs. 2(252) = 504.

time = 3.93, size = 963, normalized size = 3.34

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)^3/(a+a*sec(f*x+e))^2,x, algorithm="fricas")
[Out] 1/12*(3*d^3*f^4*x^4 + 12*c*d^2*f^4*x^3 - 12*c^2*d*f^2 + 6*(3*c^2*d*f^4 - 2*
d^3*f^2)*x^2 + 3*(d^3*f^4*x^4 + 4*c*d^2*f^4*x^3 + 6*c^2*d*f^4*x^2 + 4*c^3*f
^4*x)*cos(f*x + e)^2 + 12*(c^3*f^4 - 2*c*d^2*f^2)*x + 6*(d^3*f^4*x^4 + 4*c*
d^2*f^4*x^3 - 2*c^2*d*f^2 + 2*(3*c^2*d*f^4 - d^3*f^2)*x^2 + 4*(c^3*f^4 - c*
d^2*f^2)*x)*cos(f*x + e) - 120*(I*d^3*f*x + I*c*d^2*f + (I*d^3*f*x + I*c*d^
2*f)*cos(f*x + e)^2 + 2*(I*d^3*f*x + I*c*d^2*f)*cos(f*x + e))*dilog(-cos(f*
x + e) + I*sin(f*x + e)) - 120*(-I*d^3*f*x - I*c*d^2*f + (-I*d^3*f*x - I*c*
d^2*f)*cos(f*x + e)^2 + 2*(-I*d^3*f*x - I*c*d^2*f)*cos(f*x + e))*dilog(-cos(
f*x + e) - I*sin(f*x + e)) - 12*(5*d^3*f^2*x^2 + 10*c*d^2*f^2*x + 5*c^2*d*f^2
- 2*d^3 + (5*d^3*f^2*x^2 + 10*c*d^2*f^2*x + 5*c^2*d*f^2 - 2*d^3)*cos(f*
x + e)^2 + 2*(5*d^3*f^2*x^2 + 10*c*d^2*f^2*x + 5*c^2*d*f^2 - 2*d^3)*cos(f*x
+ e))*log(cos(f*x + e) + I*sin(f*x + e) + 1) - 12*(5*d^3*f^2*x^2 + 10*c*d^
2*f^2*x + 5*c^2*d*f^2 - 2*d^3 + (5*d^3*f^2*x^2 + 10*c*d^2*f^2*x + 5*c^2*d*f
^2 - 2*d^3)*cos(f*x + e)^2 + 2*(5*d^3*f^2*x^2 + 10*c*d^2*f^2*x + 5*c^2*d*f^
2 - 2*d^3)*cos(f*x + e))*log(cos(f*x + e) - I*sin(f*x + e) + 1) - 120*(d^3*
cos(f*x + e)^2 + 2*d^3*cos(f*x + e) + d^3)*polylog(3, -cos(f*x + e) + I*sin(f*x
+ e)) - 120*(d^3*cos(f*x + e)^2 + 2*d^3*cos(f*x + e) + d^3)*polylog(3,
-cos(f*x + e) - I*sin(f*x + e)) - 4*(4*d^3*f^3*x^3 + 12*c*d^2*f^3*x^2 + 4*
c^3*f^3 - 6*c*d^2*f + 6*(2*c^2*d*f^3 - d^3*f)*x + (5*d^3*f^3*x^3 + 15*c*d^2
*f^3*x^2 + 5*c^3*f^3 - 6*c*d^2*f + 3*(5*c^2*d*f^3 - 2*d^3*f)*x)*cos(f*x + e
))*sin(f*x + e))/(a^2*f^4*cos(f*x + e)^2 + 2*a^2*f^4*cos(f*x + e) + a^2*f^4)
```

Sympy [F]

time = 0.00, size = 0, normalized size = 0.00

$$\frac{\int \frac{c^3}{\sec^2(e+fx)+2\sec(e+fx)+1} dx + \int \frac{d^3x^3}{\sec^2(e+fx)+2\sec(e+fx)+1} dx + \int \frac{3cd^2x^2}{\sec^2(e+fx)+2\sec(e+fx)+1} dx + \int \frac{3c^2dx}{\sec^2(e+fx)+2\sec(e+fx)+1} dx}{a^2}$$

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate((d*x+c)**3/(a+a*sec(f*x+e))**2,x)`

[Out] `(Integral(c**3/(\sec(e + f*x)**2 + 2*\sec(e + f*x) + 1), x) + Integral(d**3*x**3/(\sec(e + f*x)**2 + 2*\sec(e + f*x) + 1), x) + Integral(3*c*d**2*x**2/(\sec(e + f*x)**2 + 2*\sec(e + f*x) + 1), x) + Integral(3*c**2*d*x/(\sec(e + f*x)**2 + 2*\sec(e + f*x) + 1), x))/a**2`

Giac [F]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate((d*x+c)^3/(a+a*sec(f*x+e))^2,x, algorithm="giac")`

[Out] `integrate((d*x + c)^3/(a*\sec(f*x + e) + a)^2, x)`

Mupad [F(-1)]

time = 0.00, size = -1, normalized size = -0.00

Hanged

Verification of antiderivative is not currently implemented for this CAS.

[In] `int((c + d*x)^3/(a + a/cos(e + f*x))^2,x)`

[Out] `\text{Hanged}`

$$3.17 \quad \int \frac{(c+dx)^2}{(a+a \sec(e+fx))^2} dx$$

Optimal. Leaf size=229

$$\frac{5i(c+dx)^2}{3a^2f} + \frac{(c+dx)^3}{3a^2d} - \frac{20d(c+dx) \log(1+e^{i(e+fx)})}{3a^2f^2} + \frac{20id^2 \text{PolyLog}(2, -e^{i(e+fx)})}{3a^2f^3} - \frac{d(c+dx) \sec^2(\frac{e}{2} + \frac{fx}{2})}{3a^2f^2}$$

[Out] $\frac{5/3*I*(d*x+c)^2/a^2/f+1/3*(d*x+c)^3/a^2/d-20/3*d*(d*x+c)*\ln(1+\exp(I*(f*x+e)))/a^2/f^2+20/3*I*d^2*\text{polylog}(2, -\exp(I*(f*x+e)))/a^2/f^3-1/3*d*(d*x+c)*\sec(1/2*f*x+1/2*e)^2/a^2/f^2+2/3*d^2*\tan(1/2*f*x+1/2*e)/a^2/f^3-5/3*(d*x+c)^2*\text{atan}(1/2*f*x+1/2*e)/a^2/f+1/6*(d*x+c)^2*\sec(1/2*f*x+1/2*e)^2*\tan(1/2*f*x+1/2*e)/a^2/f}{3a^2f^2}$

Rubi [A]

time = 0.36, antiderivative size = 229, normalized size of antiderivative = 1.00, number of steps used = 17, number of rules used = 10, integrand size = 20, $\frac{\text{number of rules}}{\text{integrand size}}$ = 0.500, Rules used = {4276, 3399, 4271, 3852, 8, 4269, 3800, 2221, 2317, 2438}

$$-\frac{20d(c+dx) \log(1+e^{i(e+fx)})}{3a^2f^2} - \frac{d(c+dx) \sec^2(\frac{e}{2} + \frac{fx}{2})}{3a^2f^2} - \frac{5(c+dx)^2 \tan(\frac{e}{2} + \frac{fx}{2})}{3a^2f} + \frac{(c+dx)^2 \tan(\frac{e}{2} + \frac{fx}{2}) \sec^2(\frac{e}{2} + \frac{fx}{2})}{6a^2f} + \frac{5i(c+dx)^2}{3a^2f} + \frac{(c+dx)^3}{3a^2d} + \frac{20id^2 \text{Li}_2(-e^{i(e+fx)})}{3a^2f^3} + \frac{2d^2 \tan(\frac{e}{2} + \frac{fx}{2})}{3a^2f^3}$$

Antiderivative was successfully verified.

[In] $\text{Int}[(c + d*x)^2/(a + a*\text{Sec}[e + f*x])^2, x]$

[Out] $\frac{((5*I)/3)*(c + d*x)^2/(a^2*f) + (c + d*x)^3/(3*a^2*d) - (20*d*(c + d*x)*\log[1 + E^(I*(e + f*x))])/(3*a^2*f^2) + (((20*I)/3)*d^2*\text{PolyLog}[2, -E^(I*(e + f*x))])/(a^2*f^3) - (d*(c + d*x)*\text{Sec}[e/2 + (f*x)/2]^2)/(3*a^2*f^2) + (2*d^2*\text{Tan}[e/2 + (f*x)/2])/(3*a^2*f^3) - (5*(c + d*x)^2*\text{Tan}[e/2 + (f*x)/2])/(3*a^2*f) + ((c + d*x)^2*\text{Sec}[e/2 + (f*x)/2]^2*\text{Tan}[e/2 + (f*x)/2])/(6*a^2*f)}$

Rule 8

$\text{Int}[a_, x_Symbol] :> \text{Simp}[a*x, x] /; \text{FreeQ}[a, x]$

Rule 2221

$\text{Int}[(((F_)^((g_ .)*(e_ .) + (f_ .)*(x_))))^(n_ .)*((c_ .) + (d_ .)*(x_))^(m_ .))/((a_) + (b_ .)*((F_)^((g_ .)*(e_ .) + (f_ .)*(x_))))^(n_ .), x_Symbol] :> \text{Simp}[((c + d*x)^m/(b*f*g*n*\text{Log}[F]))*\text{Log}[1 + b*((F^(g*(e + f*x)))^n/a)], x] - \text{Dist}[d*(m/(b*f*g*n*\text{Log}[F])), \text{Int}[(c + d*x)^(m - 1)*\text{Log}[1 + b*((F^(g*(e + f*x)))^n/a)], x], x] /; \text{FreeQ}[\{F, a, b, c, d, e, f, g, n\}, x] \&& \text{IGtQ}[m, 0]$

Rule 2317

$\text{Int}[\text{Log}[(a_) + (b_ .)*((F_)^((e_ .)*(c_ .) + (d_ .)*(x_))))^(n_ .)], x_Symbol] :> \text{Dist}[1/(d*e*n*\text{Log}[F]), \text{Subst}[\text{Int}[\text{Log}[a + b*x]/x, x], x, (F^(e*(c + d*x)))]$

```
)^n], x] /; FreeQ[{F, a, b, c, d, e, n}, x] && GtQ[a, 0]
```

Rule 2438

```
Int[Log[(c_.)*(d_) + (e_)*(x_)^(n_.)]/(x_), x_Symbol] :> Simp[-PolyLog[2, (-c)*e*x^n]/n, x] /; FreeQ[{c, d, e, n}, x] && EqQ[c*d, 1]
```

Rule 3399

```
Int[((c_.) + (d_.)*(x_))^(m_.)*(a_ + (b_)*sin[(e_.) + (f_.)*(x_)])^(n_.), x_Symbol] :> Dist[(2*a)^n, Int[(c + d*x)^m*Sin[(1/2)*(e + Pi*(a/(2*b))) + f*(x/2)]^(2*n), x], x] /; FreeQ[{a, b, c, d, e, f, m}, x] && EqQ[a^2 - b^2, 0] && IntegerQ[n] && (GtQ[n, 0] || IGtQ[m, 0])
```

Rule 3800

```
Int[((c_.) + (d_.)*(x_))^(m_.)*tan[(e_.) + (f_.)*(x_)], x_Symbol] :> Simp[I*((c + d*x)^(m + 1)/(d*(m + 1))), x] - Dist[2*I, Int[(c + d*x)^m*(E^(2*I*(e + f*x))/(1 + E^(2*I*(e + f*x)))), x], x] /; FreeQ[{c, d, e, f}, x] && IGtQ[m, 0]
```

Rule 3852

```
Int[csc[(c_.) + (d_.)*(x_)]^(n_.), x_Symbol] :> Dist[-d^(-1), Subst[Int[ExpandIntegrand[(1 + x^2)^(n/2 - 1), x], x], x, Cot[c + d*x]], x] /; FreeQ[{c, d}, x] && IGtQ[n/2, 0]
```

Rule 4269

```
Int[csc[(e_.) + (f_.)*(x_)]^2*((c_.) + (d_.)*(x_))^(m_.), x_Symbol] :> Simp[(-(c + d*x)^m)*(Cot[e + f*x]/f), x] + Dist[d*(m/f), Int[(c + d*x)^(m - 1)*Cot[e + f*x], x], x] /; FreeQ[{c, d, e, f}, x] && GtQ[m, 0]
```

Rule 4271

```
Int[(csc[(e_.) + (f_.)*(x_)]*(b_.))^(n_)*((c_.) + (d_.)*(x_))^(m_), x_Symbol] :> Simp[(-b^2)*(c + d*x)^m*Cot[e + f*x]*((b*Csc[e + f*x])^(n - 2)/(f*(n - 1))), x] + (Dist[b^2*d^2*m*((m - 1)/(f^2*(n - 1)*(n - 2))), Int[(c + d*x)^(m - 2)*(b*Csc[e + f*x])^(n - 2), x], x] + Dist[b^2*((n - 2)/(n - 1)), Int[(c + d*x)^m*(b*Csc[e + f*x])^(n - 2), x], x] - Simp[b^2*d*m*(c + d*x)^(m - 1)*((b*Csc[e + f*x])^(n - 2)/(f^2*(n - 1)*(n - 2))), x]) /; FreeQ[{b, c, d, e, f}, x] && GtQ[n, 1] && NeQ[n, 2] && GtQ[m, 1]
```

Rule 4276

```
Int[(csc[(e_.) + (f_.)*(x_)]*(b_.) + (a_.))^(n_)*((c_.) + (d_.)*(x_))^(m_), x_Symbol] :> Int[ExpandIntegrand[(c + d*x)^m, 1/(Sin[e + f*x]^n/(b + a*Si
```

```
n[e + f*x])^n, x] /; FreeQ[{a, b, c, d, e, f}, x] && ILtQ[n, 0] && IGtQ[m, 0]
```

Rubi steps

$$\begin{aligned}
\int \frac{(c+dx)^2}{(a+a \sec(e+fx))^2} dx &= \int \left(\frac{(c+dx)^2}{a^2} + \frac{(c+dx)^2}{a^2(1+\cos(e+fx))^2} - \frac{2(c+dx)^2}{a^2(1+\cos(e+fx))} \right) dx \\
&= \frac{(c+dx)^3}{3a^2d} + \frac{\int \frac{(c+dx)^2}{(1+\cos(e+fx))^2} dx}{a^2} - \frac{2 \int \frac{(c+dx)^2}{1+\cos(e+fx)} dx}{a^2} \\
&= \frac{(c+dx)^3}{3a^2d} + \frac{\int (c+dx)^2 \csc^4\left(\frac{e+\pi}{2} + \frac{fx}{2}\right) dx}{4a^2} - \frac{\int (c+dx)^2 \csc^2\left(\frac{e+\pi}{2} + \frac{fx}{2}\right) dx}{a^2} \\
&= \frac{(c+dx)^3}{3a^2d} - \frac{d(c+dx) \sec^2\left(\frac{e}{2} + \frac{fx}{2}\right)}{3a^2f^2} - \frac{2(c+dx)^2 \tan\left(\frac{e}{2} + \frac{fx}{2}\right)}{a^2f} + \frac{(c+dx)^2 \sec^2\left(\frac{e}{2} + \frac{fx}{2}\right)}{a^2f} \\
&= \frac{2i(c+dx)^2}{a^2f} + \frac{(c+dx)^3}{3a^2d} - \frac{d(c+dx) \sec^2\left(\frac{e}{2} + \frac{fx}{2}\right)}{3a^2f^2} - \frac{5(c+dx)^2 \tan\left(\frac{e}{2} + \frac{fx}{2}\right)}{3a^2f} \\
&= \frac{5i(c+dx)^2}{3a^2f} + \frac{(c+dx)^3}{3a^2d} - \frac{8d(c+dx) \log(1+e^{i(e+fx)})}{a^2f^2} - \frac{d(c+dx) \sec^2\left(\frac{e}{2} + \frac{fx}{2}\right)}{3a^2f^2} \\
&= \frac{5i(c+dx)^2}{3a^2f} + \frac{(c+dx)^3}{3a^2d} - \frac{20d(c+dx) \log(1+e^{i(e+fx)})}{3a^2f^2} - \frac{d(c+dx) \sec^2\left(\frac{e}{2} + \frac{fx}{2}\right)}{3a^2f^2} \\
&= \frac{5i(c+dx)^2}{3a^2f} + \frac{(c+dx)^3}{3a^2d} - \frac{20d(c+dx) \log(1+e^{i(e+fx)})}{3a^2f^2} + \frac{8id^2 \text{Li}_2(-e^{i(e+fx)})}{a^2f^3} \\
&= \frac{5i(c+dx)^2}{3a^2f} + \frac{(c+dx)^3}{3a^2d} - \frac{20d(c+dx) \log(1+e^{i(e+fx)})}{3a^2f^2} + \frac{20id^2 \text{Li}_2(-e^{i(e+fx)})}{3a^2f^3}
\end{aligned}$$

Mathematica [B] Both result and optimal contain complex but leaf count is larger than twice the leaf count of optimal. 925 vs. 2(229) = 458.

time = 6.67, size = 925, normalized size = 4.04

Warning: Unable to verify antiderivative.

[In] `Integrate[(c + d*x)^2/(a + a*Sec[e + f*x])^2, x]`

[Out] `(-80*c*d*Cos[e/2 + (f*x)/2]^4*Sec[e/2]*Sec[e + f*x]^2*(Cos[e/2]*Log[Cos[e/2]*Cos[(f*x)/2] - Sin[e/2]*Sin[(f*x)/2]] + (f*x*Sin[e/2])/2))/(3*f^2*(a + a*`

$$\begin{aligned}
& \text{Sec}[e + f*x])^2 * (\cos[e/2]^2 + \sin[e/2]^2) - (80*d^2 * \cos[e/2 + (f*x)/2]^4 * \text{Csc}[e/2] * ((f^2 * x^2) / (4 * E^{(I * \text{ArcTan}[\cot[e/2]])})) - (\cot[e/2] * ((I/2) * f*x * (-\pi - 2 * \text{ArcTan}[\cot[e/2]])) - \pi * \log[1 + E^{(-I) * f*x}] - 2 * ((f*x)/2 - \text{ArcTan}[\cot[e/2]]) * \log[1 - E^{((2*I) * ((f*x)/2 - \text{ArcTan}[\cot[e/2]]))}] + \pi * \log[\cos[(f*x)/2]] - 2 * \text{ArcTan}[\cot[e/2]] * \log[\sin[(f*x)/2 - \text{ArcTan}[\cot[e/2]]]] + I * \text{PolyLog}[2, E^{((2*I) * ((f*x)/2 - \text{ArcTan}[\cot[e/2]]))}]) / \text{Sqrt}[1 + \cot[e/2]^2] * \text{Sec}[e/2] * \text{Sec}[e + f*x]^2 / (3*f^3 * (a + a * \text{Sec}[e + f*x])^2 * \text{Sqrt}[\csc[e/2]^2 * (\cos[e/2]^2 + \sin[e/2]^2)]) + (\cos[e/2 + (f*x)/2] * \text{Sec}[e/2] * \text{Sec}[e + f*x]^2 * (-4*c*d*f * \cos[(f*x)/2] - 4*d^2 * 2*f*x * \cos[(f*x)/2] + 9*c^2 * f^3 * x * \cos[(f*x)/2] + 9*c*d*f^3 * x^2 * \cos[(f*x)/2] + 3*d^2 * f^3 * x^3 * \cos[(f*x)/2] - 4*c*d*f * \cos[e + (f*x)/2] - 4*d^2 * f*x * \cos[e + (f*x)/2] + 9*c^2 * f^3 * x * \cos[e + (f*x)/2] + 9*c*d*f^3 * x^2 * \cos[e + (f*x)/2] + 3*d^2 * f^3 * x^3 * \cos[e + (f*x)/2] + 3*c^2 * f^3 * x * \cos[e + (3*f*x)/2] + 3*c*d*f^3 * x^2 * \cos[2*e + (3*f*x)/2] + d^2 * f^3 * x^3 * \cos[e + (3*f*x)/2] + 3*c^2 * f^3 * x * \cos[2*e + (3*f*x)/2] + 3*c*d*f^3 * x^2 * \cos[2*e + (3*f*x)/2] + d^2 * f^3 * x^3 * \cos[2*e + (3*f*x)/2] + 8*d^2 * \sin[(f*x)/2] - 18*c^2 * f^2 * \sin[(f*x)/2] - 36*c*d*f^2 * x * \sin[(f*x)/2] - 18*d^2 * f^2 * x^2 * \sin[(f*x)/2] - 4*d^2 * \sin[e + (f*x)/2] + 12*c^2 * f^2 * \sin[e + (f*x)/2] + 24*c*d*f^2 * x * \sin[e + (f*x)/2] + 12*d^2 * f^2 * x^2 * \sin[e + (f*x)/2] + 4*d^2 * \sin[e + (3*f*x)/2] - 10*c^2 * f^2 * \sin[e + (3*f*x)/2] - 20*c*d*f^2 * x * \sin[e + (3*f*x)/2] - 10*d^2 * f^2 * x^2 * \sin[e + (3*f*x)/2]) / (6*f^3 * (a + a * \text{Sec}[e + f*x])^2)
\end{aligned}$$

Maple [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 452 vs. $2(187) = 374$.

time = 0.65, size = 453, normalized size = 1.98

method	result
risch	$\frac{d^2x^3}{3a^2} + \frac{dcx^2}{a^2} + \frac{c^2x}{a^2} + \frac{c^3}{3a^2d} - \frac{2i(6d^2f^2x^2e^{2i(fx+e)} - 2id^2fxe^{i(fx+e)} + 12cd^2x^2e^{2i(fx+e)} + 9d^2f^2x^2e^{i(fx+e)} - 2icdf^2e^{2i(fx+e)} - 18cd^2f^2x^2e^{2i(fx+e)} + 36c^2d^2f^2x^2e^{2i(fx+e)} - 18d^2f^2x^2e^{2i(fx+e)} + 4d^2f^2e^{2i(fx+e)} - 10c^2d^2f^2e^{2i(fx+e)} - 20c^2d^2f^2x^2e^{2i(fx+e)} + 10d^2f^2x^2e^{2i(fx+e)})}{6f^3(a + a * \text{Sec}[e + f*x])^2}$

Verification of antiderivative is not currently implemented for this CAS.

```
[In] int((d*x+c)^2/(a+a*sec(f*x+e))^2,x,method=_RETURNVERBOSE)
[Out] 1/3/a^2*d^2*x^3+1/a^2*d*c*x^2+1/a^2*c^2*x+1/3/a^2/d*c^3-2/3*I*(6*d^2*f^2*x^2*
2*exp(2*I*(f*x+e))-2*I*d^2*f*x*exp(I*(f*x+e))+12*c*d*f^2*x*exp(2*I*(f*x+e))
+9*d^2*f^2*x^2*exp(I*(f*x+e))-2*I*c*d*f*exp(2*I*(f*x+e))-2*I*d^2*f*x*exp(2*I*(f*x+e))
+6*c^2*f^2*exp(2*I*(f*x+e))+18*c*d*f^2*x*exp(I*(f*x+e))+5*d^2*x^2*f^2-
2*I*c*d*f*exp(I*(f*x+e))+9*c^2*f^2*exp(I*(f*x+e))+10*c*d*f^2*x+5*c^2*f^2*x^2-
2*d^2*f*exp(2*I*(f*x+e))-4*d^2*f*exp(I*(f*x+e))-2*d^2)/f^3/a^2/(exp(I*(f*x+e))
)+1)^3+20/3/a^2*d/f^2*c*ln(exp(I*(f*x+e)))-20/3/a^2*d/f^2*c*ln(exp(I*(f*x+e))
)+1)+10/3*I/a^2*d^2/f*x^2+20/3*I/a^2*d^2/f^2*x+10/3*I/a^2*d^2/f^3*x^2-
0/3/a^2*d^2/f^2*ln(exp(I*(f*x+e))+1)*x+20/3*I*d^2*polylog(2,-exp(I*(f*x+e)))
)/a^2/f^3-20/3/a^2*d^2/f^3*x*ln(exp(I*(f*x+e)))
```

Maxima [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 1071 vs. $2(191) = 382$.

time = 1.13, size = 1071, normalized size = 4.68

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)^2/(a+a*sec(f*x+e))^2,x, algorithm="maxima")
[Out] -(I*d^2*f^3*x^3 + 3*I*c*d*f^3*x^2 + 3*I*c^2*f^3*x + 10*c^2*f^2 - 4*d^2 + 20
*(d^2*f*x + c*d*f + (d^2*f*x + c*d*f)*cos(3*f*x + 3*e) + 3*(d^2*f*x + c*d*f
)*cos(2*f*x + 2*e) + 3*(d^2*f*x + c*d*f)*cos(f*x + e) - (-I*d^2*f*x - I*c*d
*f)*sin(3*f*x + 3*e) - 3*(-I*d^2*f*x - I*c*d*f)*sin(2*f*x + 2*e) - 3*(-I*d^
2*f*x - I*c*d*f)*sin(f*x + e))*arctan2(sin(f*x + e), cos(f*x + e) + 1) + (I
*d^2*f^3*x^3 + (3*I*c*d*f^3 - 10*d^2*f^2)*x^2 + (3*I*c^2*f^3 - 20*c*d*f^2)*
x)*cos(3*f*x + 3*e) + (3*I*d^2*f^3*x^3 + 12*c^2*f^2 - 4*I*c*d*f - 9*(-I*c*d
*f^3 + 2*d^2*f^2)*x^2 - 4*d^2 + (9*I*c^2*f^3 - 36*c*d*f^2 - 4*I*d^2*f)*x)*c
os(2*f*x + 2*e) + (3*I*d^2*f^3*x^3 + 18*c^2*f^2 - 4*I*c*d*f - 3*(-3*I*c*d*f
^3 + 4*d^2*f^2)*x^2 - 8*d^2 + (9*I*c^2*f^3 - 24*c*d*f^2 - 4*I*d^2*f)*x)*cos
(f*x + e) - 20*(d^2*cos(3*f*x + 3*e) + 3*d^2*cos(2*f*x + 2*e) + 3*d^2*cos(f
*x + e) + I*d^2*sin(3*f*x + 3*e) + 3*I*d^2*sin(2*f*x + 2*e) + 3*I*d^2*sin(f
*x + e) + d^2)*dilog(-e^(I*f*x + I*e)) - 10*(I*d^2*f*x + I*c*d*f + (I*d^2*f
*x + I*c*d*f)*cos(3*f*x + 3*e) + 3*(I*d^2*f*x + I*c*d*f)*cos(2*f*x + 2*e) +
3*(I*d^2*f*x + I*c*d*f)*cos(f*x + e) - (d^2*f*x + c*d*f)*sin(3*f*x + 3*e) -
3*(d^2*f*x + c*d*f)*sin(2*f*x + 2*e) - 3*(d^2*f*x + c*d*f)*sin(f*x + e))*log
(cos(f*x + e)^2 + sin(f*x + e)^2 + 2*cos(f*x + e) + 1) - (d^2*f^3*x^3 + (3*c*d*f^3 + 10*I*d^2*f^2)*x^2 + (3*c^2*f^3 + 20*I*c*d*f^2)*x)*sin(3*f*x +
3*e) - (3*d^2*f^3*x^3 - 12*I*c^2*f^2 - 4*c*d*f + 9*(c*d*f^3 + 2*I*d^2*f^2)*
x^2 + 4*I*d^2 + (9*c^2*f^3 + 36*I*c*d*f^2 - 4*d^2*f)*x)*sin(2*f*x + 2*e) -
(3*d^2*f^3*x^3 - 18*I*c^2*f^2 - 4*c*d*f + 3*(3*c*d*f^3 + 4*I*d^2*f^2)*x^2 +
8*I*d^2 + (9*c^2*f^3 + 24*I*c*d*f^2 - 4*d^2*f)*x)*sin(f*x + e))/(-3*I*a^2*f
^3*cos(3*f*x + 3*e) - 9*I*a^2*f^3*cos(2*f*x + 2*e) - 9*I*a^2*f^3*cos(f*x +
e) + 3*a^2*f^3*sin(3*f*x + 3*e) + 9*a^2*f^3*sin(2*f*x + 2*e) + 9*a^2*f^3*s
in(f*x + e) - 3*I*a^2*f^3)
```

Fricas [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 515 vs. 2(191) = 382.

time = 3.52, size = 515, normalized size = 2.25

$$\frac{f(x)^2 \left(3 f(x)^2+2 g(x)^2-2 i f(x) g(x)+2 f'(x)^2+2 g'(x)^2-2 f'(x) g'(x)-i g'(x)^2-2 f''(x)^2-2 g''(x)^2+2 f''(x) g''(x)-i g''(x)^2-2 f'''(x)^2-2 g'''(x)^2+2 f'''(x) g'''(x)-i g'''(x)^2-2 f''''(x)^2-2 g''''(x)^2+2 f''''(x) g''''(x)-i g''''(x)^2\right)}{24 f(x)^3 g(x)^3}$$

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)^2/(a+a*sec(f*x+e))^2,x, algorithm="fricas")
[Out] 1/3*(d^2*f^3*x^3 + 3*c*d*f^3*x^2 - 2*c*d*f + (d^2*f^3*x^3 + 3*c*d*f^3*x^2 +
3*c^2*f^3*x)*cos(f*x + e)^2 + (3*c^2*f^3 - 2*d^2*f)*x + 2*(d^2*f^3*x^3 + 3
*c*d*f^3*x^2 - c*d*f + (3*c^2*f^3 - d^2*f)*x)*cos(f*x + e) - 10*(I*d^2*f*cos
(3*f*x + 3*e) + 3*(I*d^2*f*x + I*c*d*f)*cos(2*f*x + 2*e) + 3*(I*d^2*f*x + I*c*d*f)*cos(f*x + e) - (d^2*f*x + c*d*f)*sin(3*f*x + 3*e) - 3*(d^2*f*x + c*d*f)*sin(2*f*x + 2*e) - 3*(d^2*f*x + c*d*f)*sin(f*x + e))*log
(cos(f*x + e)^2 + sin(f*x + e)^2 + 2*cos(f*x + e) + 1) - (d^2*f^3*x^3 + (3*c*d*f^3 + 10*I*d^2*f^2)*x^2 + (3*c^2*f^3 + 20*I*c*d*f^2)*x)*sin(3*f*x +
3*e) - (3*d^2*f^3*x^3 - 12*I*c^2*f^2 - 4*c*d*f + 9*(c*d*f^3 + 2*I*d^2*f^2)*
x^2 + 4*I*d^2 + (9*c^2*f^3 + 36*I*c*d*f^2 - 4*d^2*f)*x)*sin(2*f*x + 2*e) -
(3*d^2*f^3*x^3 - 18*I*c^2*f^2 - 4*c*d*f + 3*(3*c*d*f^3 + 4*I*d^2*f^2)*x^2 +
8*I*d^2 + (9*c^2*f^3 + 24*I*c*d*f^2 - 4*d^2*f)*x)*sin(f*x + e))/(-3*I*a^2*f
^3*cos(3*f*x + 3*e) - 9*I*a^2*f^3*cos(2*f*x + 2*e) - 9*I*a^2*f^3*cos(f*x +
e) + 3*a^2*f^3*sin(3*f*x + 3*e) + 9*a^2*f^3*sin(2*f*x + 2*e) + 9*a^2*f^3*s
in(f*x + e) - 3*I*a^2*f^3)
```

$$\begin{aligned} & f*x + e)^2 + 2*I*d^2*\cos(f*x + e) + I*d^2)*\operatorname{dilog}(-\cos(f*x + e) + I*\sin(f*x + e)) - 10*(-I*d^2*\cos(f*x + e))^2 - 2*I*d^2*\cos(f*x + e) - I*d^2)*\operatorname{dilog}(-\cos(f*x + e) - I*\sin(f*x + e)) - 10*(d^2*f*x + c*d*f + (d^2*f*x + c*d*f)*\cos(f*x + e)^2 + 2*(d^2*f*x + c*d*f)*\cos(f*x + e))*\log(\cos(f*x + e) + I*\sin(f*x + e) + 1) - 10*(d^2*f*x + c*d*f + (d^2*f*x + c*d*f)*\cos(f*x + e)^2 + 2*(d^2*f*x + c*d*f)*\cos(f*x + e))*\log(\cos(f*x + e) - I*\sin(f*x + e) + 1) - (4*d^2*f^2*x^2 + 8*c*d*f^2*x + 4*c^2*f^2 - 2*d^2 + (5*d^2*f^2*x^2 + 10*c*d*f^2*x + 5*c^2*f^2 - 2*d^2)*\cos(f*x + e))*\sin(f*x + e))/(a^2*f^3*\cos(f*x + e)^2 + 2*a^2*f^3*\cos(f*x + e) + a^2*f^3) \end{aligned}$$
Sympy [F]

time = 0.00, size = 0, normalized size = 0.00

$$\frac{\int \frac{c^2}{\sec^2(e+fx)+2\sec(e+fx)+1} dx + \int \frac{d^2x^2}{\sec^2(e+fx)+2\sec(e+fx)+1} dx + \int \frac{2cdx}{\sec^2(e+fx)+2\sec(e+fx)+1} dx}{a^2}$$

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate((d*x+c)**2/(a+a*sec(f*x+e))**2,x)`[Out] `(Integral(c**2/(\sec(e + f*x)**2 + 2*\sec(e + f*x) + 1), x) + Integral(d**2*x**2/(\sec(e + f*x)**2 + 2*\sec(e + f*x) + 1), x) + Integral(2*c*d*x/(\sec(e + f*x)**2 + 2*\sec(e + f*x) + 1), x))/a**2`Giac [F]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate((d*x+c)^2/(a+a*sec(f*x+e))^2,x, algorithm="giac")`[Out] `integrate((d*x + c)^2/(a*\sec(f*x + e) + a)^2, x)`Mupad [F(-1)]

time = 0.00, size = -1, normalized size = -0.00

Hanged

Verification of antiderivative is not currently implemented for this CAS.

[In] `int((c + d*x)^2/(a + a/cos(e + f*x))^2,x)`[Out] `\text{Hanged}`

3.18 $\int \frac{c+dx}{(a+a \sec(e+fx))^2} dx$

Optimal. Leaf size=140

$$\frac{(c+dx)^2}{2a^2d} - \frac{10d \log(\cos(\frac{e}{2} + \frac{fx}{2}))}{3a^2f^2} - \frac{d \sec^2(\frac{e}{2} + \frac{fx}{2})}{6a^2f^2} - \frac{5(c+dx) \tan(\frac{e}{2} + \frac{fx}{2})}{3a^2f} + \frac{(c+dx) \sec^2(\frac{e}{2} + \frac{fx}{2}) \tan(\frac{e}{2} + \frac{fx}{2})}{6a^2f}$$

[Out] $1/2*(d*x+c)^2/a^2/d-10/3*d*ln(\cos(1/2*f*x+1/2*e))/a^2/f^2-1/6*d*sec(1/2*f*x+1/2*e)^2/a^2/f^2-5/3*(d*x+c)*tan(1/2*f*x+1/2*e)/a^2/f+1/6*(d*x+c)*sec(1/2*f*x+1/2*e)^2*tan(1/2*f*x+1/2*e)/a^2/f$

Rubi [A]

time = 0.14, antiderivative size = 140, normalized size of antiderivative = 1.00, number of steps used = 9, number of rules used = 5, integrand size = 18, $\frac{\text{number of rules}}{\text{integrand size}}$ = 0.278, Rules used = {4276, 3399, 4270, 4269, 3556}

$$-\frac{5(c+dx) \tan(\frac{e}{2} + \frac{fx}{2})}{3a^2f} + \frac{(c+dx) \tan(\frac{e}{2} + \frac{fx}{2}) \sec^2(\frac{e}{2} + \frac{fx}{2})}{6a^2f} + \frac{(c+dx)^2}{2a^2d} - \frac{d \sec^2(\frac{e}{2} + \frac{fx}{2})}{6a^2f^2} - \frac{10d \log(\cos(\frac{e}{2} + \frac{fx}{2}))}{3a^2f^2}$$

Antiderivative was successfully verified.

[In] $\text{Int}[(c + d*x)/(a + a*\text{Sec}[e + f*x])^2, x]$

[Out] $(c + d*x)^2/(2*a^2*d) - (10*d*\text{Log}[\text{Cos}[e/2 + (f*x)/2]])/(3*a^2*f^2) - (d*\text{Sec}[e/2 + (f*x)/2]^2)/(6*a^2*f^2) - (5*(c + d*x)*\text{Tan}[e/2 + (f*x)/2])/(3*a^2*f) + ((c + d*x)*\text{Sec}[e/2 + (f*x)/2]^2*\text{Tan}[e/2 + (f*x)/2])/(6*a^2*f)$

Rule 3399

$\text{Int}[((c_.) + (d_.)*(x_))^{(m_.)}*((a_) + (b_.)*\sin((e_.) + (f_.)*(x_)))^{(n_.)}, x_{\text{Symbol}}] \rightarrow \text{Dist}[(2*a)^n, \text{Int}[(c + d*x)^m*\text{Sin}[(1/2)*(e + \text{Pi}*(a/(2*b))) + f*(x/2)]^{(2*n)}, x], x] /; \text{FreeQ}[\{a, b, c, d, e, f, m\}, x] \&& \text{EqQ}[a^2 - b^2, 0] \&& \text{IntegerQ}[n] \&& (\text{GtQ}[n, 0] \text{ || } \text{IGtQ}[m, 0])$

Rule 3556

$\text{Int}[\tan[(c_.) + (d_.)*(x_)], x_{\text{Symbol}}] \rightarrow \text{Simp}[-\text{Log}[\text{RemoveContent}[\text{Cos}[c + d*x], x]]/d, x] /; \text{FreeQ}[\{c, d\}, x]$

Rule 4269

$\text{Int}[\csc[(e_.) + (f_.)*(x_)]^{2*}((c_.) + (d_.)*(x_))^{(m_.)}, x_{\text{Symbol}}] \rightarrow \text{Simp}[-(-(c + d*x)^m)*(\text{Cot}[e + f*x]/f), x] + \text{Dist}[d*(m/f), \text{Int}[(c + d*x)^{(m - 1)}*\text{Cot}[e + f*x], x], x] /; \text{FreeQ}[\{c, d, e, f\}, x] \&& \text{GtQ}[m, 0]$

Rule 4270

$\text{Int}[(\csc[(e_.) + (f_.)*(x_)]*(b_.)^{(n_.)}*((c_.) + (d_.)*(x_)), x_{\text{Symbol}}] \rightarrow \text{Simp}[(-b^2)*(c + d*x)*\text{Cot}[e + f*x]*((b*\csc[e + f*x])^{(n - 2)}/(f*(n - 1))),$

```
x] + (Dist[b^2*((n - 2)/(n - 1)), Int[(c + d*x)*(b*Csc[e + f*x])^(n - 2), x], x] - Simp[b^2*d*((b*Csc[e + f*x])^(n - 2)/(f^2*(n - 1)*(n - 2))), x]) /; FreeQ[{b, c, d, e, f}, x] && GtQ[n, 1] && NeQ[n, 2]
```

Rule 4276

```
Int[(csc[(e_.) + (f_.)*(x_.)]*(b_.) + (a_.))^(n_.)*((c_.) + (d_.)*(x_.))^m_. , x_Symbol] :> Int[ExpandIntegrand[(c + d*x)^m, 1/(Sin[e + f*x]^n/(b + a*Sin[e + f*x])^n), x], x] /; FreeQ[{a, b, c, d, e, f}, x] && ILtQ[n, 0] && IgtQ[m, 0]
```

Rubi steps

$$\begin{aligned}
\int \frac{c+dx}{(a+a\sec(e+fx))^2} dx &= \int \left(\frac{c+dx}{a^2} + \frac{c+dx}{a^2(1+\cos(e+fx))^2} - \frac{2(c+dx)}{a^2(1+\cos(e+fx))} \right) dx \\
&= \frac{(c+dx)^2}{2a^2d} + \frac{\int \frac{c+dx}{(1+\cos(e+fx))^2} dx}{a^2} - \frac{2 \int \frac{c+dx}{1+\cos(e+fx)} dx}{a^2} \\
&= \frac{(c+dx)^2}{2a^2d} + \frac{\int (c+dx) \csc^4\left(\frac{e+\pi}{2} + \frac{fx}{2}\right) dx}{4a^2} - \frac{\int (c+dx) \csc^2\left(\frac{e+\pi}{2} + \frac{fx}{2}\right) dx}{a^2} \\
&= \frac{(c+dx)^2}{2a^2d} - \frac{d \sec^2\left(\frac{e}{2} + \frac{fx}{2}\right)}{6a^2f^2} - \frac{2(c+dx) \tan\left(\frac{e}{2} + \frac{fx}{2}\right)}{a^2f} + \frac{(c+dx) \sec^2\left(\frac{e}{2} + \frac{fx}{2}\right)}{6a^2f} \\
&= \frac{(c+dx)^2}{2a^2d} - \frac{4d \log\left(\cos\left(\frac{e}{2} + \frac{fx}{2}\right)\right)}{a^2f^2} - \frac{d \sec^2\left(\frac{e}{2} + \frac{fx}{2}\right)}{6a^2f^2} - \frac{5(c+dx) \tan\left(\frac{e}{2} + \frac{fx}{2}\right)}{3a^2f} \\
&= \frac{(c+dx)^2}{2a^2d} - \frac{10d \log\left(\cos\left(\frac{e}{2} + \frac{fx}{2}\right)\right)}{3a^2f^2} - \frac{d \sec^2\left(\frac{e}{2} + \frac{fx}{2}\right)}{6a^2f^2} - \frac{5(c+dx) \tan\left(\frac{e}{2} + \frac{fx}{2}\right)}{3a^2f}
\end{aligned}$$

Mathematica [A]

time = 1.63, size = 172, normalized size = 1.23

$$\frac{2 \cos\left(\frac{1}{2}(e+fx)\right) \sec^2(e+fx) (f(c+dx) \sec\left(\frac{e}{2}\right) \sin\left(\frac{fx}{2}\right) - 10f(c+dx) \cos^2\left(\frac{1}{2}(e+fx)\right) \sec\left(\frac{e}{2}\right) \sin\left(\frac{fx}{2}\right) + \cos^3\left(\frac{1}{2}(e+fx)\right) (3f^2x(2c+dx) - 20d \log(\cos\left(\frac{1}{2}(e+fx)\right)) - 10dfx \tan\left(\frac{e}{2}\right)) + \cos\left(\frac{1}{2}(e+fx)\right) (-d + f(c+dx) \tan\left(\frac{e}{2}\right)))}{3a^2f^2(1 + \sec(e+fx))^2}$$

Antiderivative was successfully verified.

[In] `Integrate[(c + d*x)/(a + a*Sec[e + f*x])^2, x]`

[Out]
$$(2*\text{Cos}[(e + f*x)/2]*\text{Sec}[e + f*x]^2*(f*(c + d*x)*\text{Sec}[e/2]*\text{Sin}[(f*x)/2] - 10*f*(c + d*x)*\text{Cos}[(e + f*x)/2]^2*\text{Sec}[e/2]*\text{Sin}[(f*x)/2] + \text{Cos}[(e + f*x)/2]^3*(3f^2*x*(2*c + d*x) - 20*d*\text{Log}[\text{Cos}[(e + f*x)/2]] - 10*d*f*x*\text{Tan}[e/2]) + \text{Cos}[(e + f*x)/2]*(-d + f*(c + d*x)*\text{Tan}[e/2])))/(3*a^2*f^2*(1 + \text{Sec}[e + f*x])^2)$$

Maple [A]

time = 0.45, size = 143, normalized size = 1.02

method	result
norman	$\frac{cx + \frac{dx^2}{2a} - \frac{3c \tan\left(\frac{fx}{2} + \frac{e}{2}\right)}{2af} + \frac{c \left(\tan^3\left(\frac{fx}{2} + \frac{e}{2}\right)\right)}{6af} - \frac{d \left(\tan^2\left(\frac{fx}{2} + \frac{e}{2}\right)\right)}{6a f^2} - \frac{3dx \tan\left(\frac{fx}{2} + \frac{e}{2}\right)}{2af} + \frac{dx \left(\tan^3\left(\frac{fx}{2} + \frac{e}{2}\right)\right)}{6af}}{a} + \frac{5d \ln\left(1 + \tan^2\left(\frac{fx}{2} + \frac{e}{2}\right)\right)}{3a^2 f^2}$
risch	$\frac{dx^2}{2a^2} + \frac{cx}{a^2} + \frac{10idx}{3a^2f} + \frac{10ide}{3a^2f^2} - \frac{2i(6dfx e^{2i(fx+e)} - ide^{2i(fx+e)} + 6cf e^{2i(fx+e)} + 9dfx e^{i(fx+e)} - ide^{i(fx+e)} + 9cf e^{i(fx+e)} + 5dfx e^{i(fx+e)} + 1)^3}{3f^2 a^2 (e^{i(fx+e)} + 1)^3}$

Verification of antiderivative is not currently implemented for this CAS.

[In] `int((d*x+c)/(a+a*sec(f*x+e))^2,x,method=_RETURNVERBOSE)`

[Out]
$$(c/a*x+1/2*d/a*x^2-3/2*c/a/f*tan(1/2*f*x+1/2*e)+1/6*c/a/f*tan(1/2*f*x+1/2*e)^3-1/6*d/a/f^2*tan(1/2*f*x+1/2*e)^2-3/2*d/a/f*x*tan(1/2*f*x+1/2*e)+1/6*d/a/f*x*tan(1/2*f*x+1/2*e)^3)/a+5/3*d/a^2/f^2*2*ln(1+tan(1/2*f*x+1/2*e)^2)$$

Maxima [B] Leaf count of result is larger than twice the leaf count of optimal. 1157 vs. 2(115) = 230.

time = 0.66, size = 1157, normalized size = 8.26

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate((d*x+c)/(a+a*sec(f*x+e))^2,x, algorithm="maxima")`

[Out]
$$\begin{aligned} & 1/6*(d*((9*sin(f*x + e)/(cos(f*x + e) + 1) - sin(f*x + e)^3/(cos(f*x + e) + 1)^3)/(a^2*f) - 12*arctan(sin(f*x + e)/(cos(f*x + e) + 1))/(a^2*f))*e - c* \\ & ((9*sin(f*x + e)/(cos(f*x + e) + 1) - sin(f*x + e)^3/(cos(f*x + e) + 1)^3)/a^2 - 12*arctan(sin(f*x + e)/(cos(f*x + e) + 1))/a^2) + (3*(f*x + e)^2*cos(3*f*x + 3*e)^2 + 3*(f*x + e)^2*sin(3*f*x + 3*e)^2 + 3*(9*(f*x + e)^2 - 4)*c \\ & os(2*f*x + 2*e)^2 + 3*(9*(f*x + e)^2 - 4)*cos(f*x + e)^2 + 3*(9*(f*x + e)^2 - 4)*sin(f*x + e)^2 + 3*(9*(f*x + e)^2 - 4)*sin(2*f*x + 2*e)^2 + 3*(9*(f*x + e)^2 - 4)*sin(f*x + e)^2 + 2*(3*(f*x + e)^2 + (9*(f*x + e)^2 - 2)*cos(2*f*x + 2*e) + (9*(f*x + e)^2 - 2)*cos(f*x + e) + 12*(f*x + e)*sin(2*f*x + 2*e) + 18*(f*x + e)*sin(f*x + e))*cos(3*f*x + 3*e) + 2*(9*(f*x + e)^2 + 3*(9*(f*x + e)^2 - 4)*cos(f*x + e) + 18*(f*x + e)*sin(f*x + e) - 2)*cos(2*f*x + 2*e) + 2*(9*(f*x + e)^2 - 2)*cos(f*x + e) - 10*(2*(3*cos(2*f*x + 2*e) + 3*cos(f*x + e) + 1)*cos(3*f*x + 3*e) + cos(3*f*x + 3*e)^2 + 6*(3*cos(f*x + e) + 1)*cos(2*f*x + 2*e) + 9*cos(2*f*x + 2*e)^2 + 9*cos(f*x + e)^2 + 6*(sin(2*f*x + 2*e) + sin(f*x + e))*sin(3*f*x + 3*e) + sin(3*f*x + 3*e)^2 + 9*sin(2*f*x + 2*e)^2 + 18*sin(2*f*x + 2*e)*sin(f*x + e) + 9*sin(f*x + e)^2 + 6*cos(f*x + e) + 1)*log(cos(f*x + e)^2 + sin(f*x + e)^2 + 2*cos(f*x + e) + 1) - 2*(10*f*x + 12*(f*x + e)*cos(2*f*x + 2*e) + 18*(f*x + e)*cos(f*x + e) - (9*(f*x + e)^2 - 2)*sin(2*f*x + 2*e) - (9*(f*x + e)^2 - 2)*sin(f*x + e) + 10*e)*sin(3*f*x + 3*e) - 6*(6*f*x + 6*(f*x + e)*cos(f*x + e) - (9*(f*x + e)^2 - 4)*sin(f*x + e) + 6*e)*sin(2*f*x + 2*e) - 24*(f*x + e)*sin(f*x + e))*d/(a^2*f*cos(3*f*x + 3*e)^2 + \end{aligned}$$

$$9*a^2*f*cos(2*f*x + 2*e)^2 + 9*a^2*f*cos(f*x + e)^2 + a^2*f*sin(3*f*x + 3*e)^2 + 9*a^2*f*sin(2*f*x + 2*e)^2 + 18*a^2*f*sin(2*f*x + 2*e)*sin(f*x + e) + 9*a^2*f*sin(f*x + e)^2 + 6*a^2*f*cos(f*x + e) + a^2*f + 2*(3*a^2*f*cos(2*f*x + 2*e) + 3*a^2*f*cos(f*x + e) + a^2*f)*cos(3*f*x + 3*e) + 6*(3*a^2*f*cos(f*x + e) + a^2*f)*cos(2*f*x + 2*e) + 6*(a^2*f*sin(2*f*x + 2*e) + a^2*f*sin(3*f*x + 3*e))/f$$

Fricas [A]

time = 3.03, size = 192, normalized size = 1.37

$$\frac{3df^2x^2 + 6cf^2x + 3(df^2x^2 + 2cf^2x)\cos(fx + e)^2 + 2(3df^2x^2 + 6cf^2x - d)\cos(fx + e) - 10(d\cos(fx + e)^2 + 2d\cos(fx + e) + d)\log(\frac{1}{2}\cos(fx + e) + \frac{1}{2}) - 2(4dfx + 4cf + 5(df + cf)\cos(fx + e))\sin(fx + e) - 2d}{6(a^2f^2\cos(fx + e)^2 + 2a^2f^2\cos(fx + e) + a^2f^2)}$$

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)/(a+a*sec(f*x+e))^2,x, algorithm="fricas")
[Out] 1/6*(3*d*f^2*x^2 + 6*c*f^2*x + 3*(d*f^2*x^2 + 2*c*f^2*x)*cos(f*x + e)^2 + 2*(3*d*f^2*x^2 + 6*c*f^2*x - d)*cos(f*x + e) - 10*(d*cos(f*x + e)^2 + 2*d*cos(f*x + e) + d)*log(1/2*cos(f*x + e) + 1/2) - 2*(4*d*f*x + 4*c*f + 5*(d*f*x + c*f)*cos(f*x + e))*sin(f*x + e) - 2*d)/(a^2*f^2*cos(f*x + e)^2 + 2*a^2*f^2*cos(f*x + e) + a^2*f^2)
```

Sympy [F]

time = 0.00, size = 0, normalized size = 0.00

$$\int \frac{c}{\sec^2(e+fx)+2\sec(e+fx)+1} dx + \int \frac{dx}{\sec^2(e+fx)+2\sec(e+fx)+1}$$

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)/(a+a*sec(f*x+e))**2,x)
[Out] (Integral(c/(\sec(e + f*x)**2 + 2*\sec(e + f*x) + 1), x) + Integral(d*x/(\sec(e + f*x)**2 + 2*\sec(e + f*x) + 1), x))/a**2
```

Giac [B] Leaf count of result is larger than twice the leaf count of optimal. 850 vs. 2(110) = 220.

time = 0.69, size = 850, normalized size = 6.07

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)/(a+a*sec(f*x+e))^2,x, algorithm="giac")
[Out] 1/6*(3*d*f^2*x^2*tan(1/2*f*x)^3*tan(1/2*e)^3 + 6*c*f^2*x*tan(1/2*f*x)^3*tan(1/2*e)^3 - 9*d*f^2*x^2*tan(1/2*f*x)^2*tan(1/2*e)^2 - 18*c*f^2*x*tan(1/2*f*x)^2*tan(1/2*e)^2 + 9*d*f*x*tan(1/2*f*x)^2*tan(1/2*e)^3 - 10*d*log(4*(tan(1/2*f*x)^4*tan(1/2*e)^2 - 2*tan(1/2*f*x)^2*tan(1/2*e)^3))
```

$$\begin{aligned}
& x^3 \tan(1/2*f*x) + \tan(1/2*f*x)^2 \tan(1/2*f*x)^2 - 2 \tan(1/2*f*x) \tan(1/2*f*x) + 1) / (\tan(1/2*f*x)^2 + 1) * \tan(1/2*f*x)^3 \tan(1/2*f*x)^3 + 9*d*f^2*x^2 * \tan(1/2*f*x) * \tan(1/2*f*x) + 9*c*f \tan(1/2*f*x)^3 \tan(1/2*f*x)^2 + 9*c*f * \tan(1/2*f*x)^2 * \tan(1/2*f*x)^3 - d * \tan(1/2*f*x)^3 * \tan(1/2*f*x)^3 - d*f*x * \tan(1/2*f*x)^3 + 18*c*f^2*x * \tan(1/2*f*x) * \tan(1/2*f*x) - 21*d*f*x * \tan(1/2*f*x)^2 * \tan(1/2*f*x) - 21*d*f*x * \tan(1/2*f*x) * \tan(1/2*f*x)^2 + 30*d * \log(4 * (\tan(1/2*f*x)^4 * \tan(1/2*f*x)^2 - 2 * \tan(1/2*f*x)^3 * \tan(1/2*f*x) + \tan(1/2*f*x)^2 * \tan(1/2*f*x)^2 + \tan(1/2*f*x)^2 - 2 * \tan(1/2*f*x) * \tan(1/2*f*x) + 1) / (\tan(1/2*f*x)^2 + 1)) * \tan(1/2*f*x)^2 * \tan(1/2*f*x)^2 - d*f*x * \tan(1/2*f*x)^3 - 3*d*f^2*x^2 - c*f * \tan(1/2*f*x)^3 - 21*c*f * \tan(1/2*f*x)^2 * \tan(1/2*f*x) - d * \tan(1/2*f*x)^3 * \tan(1/2*f*x) - 21*c*f * \tan(1/2*f*x) * \tan(1/2*f*x)^2 + d * \tan(1/2*f*x)^2 * \tan(1/2*f*x)^2 - c*f * \tan(1/2*f*x)^3 - d * \tan(1/2*f*x) * \tan(1/2*f*x)^3 - 6*c*f^2*x + 9*d*f*x * \tan(1/2*f*x) + 9*d*f*x * \tan(1/2*f*x) - 30*d * \log(4 * (\tan(1/2*f*x)^4 * \tan(1/2*f*x)^2 - 2 * \tan(1/2*f*x)^3 * \tan(1/2*f*x) + \tan(1/2*f*x)^2 * \tan(1/2*f*x)^2 + \tan(1/2*f*x)^2 - 2 * \tan(1/2*f*x) * \tan(1/2*f*x) + 1) / (\tan(1/2*f*x)^2 + 1)) * \tan(1/2*f*x) * \tan(1/2*f*x) + 9*c*f * \tan(1/2*f*x) + d * \tan(1/2*f*x)^2 + 9*c*f * \tan(1/2*f*x) - d * \tan(1/2*f*x) * \tan(1/2*f*x) + d * \tan(1/2*f*x)^2 + 10*d * \log(4 * (\tan(1/2*f*x)^4 * \tan(1/2*f*x)^2 - 2 * \tan(1/2*f*x)^3 * \tan(1/2*f*x) + \tan(1/2*f*x)^2 * \tan(1/2*f*x)^2 + \tan(1/2*f*x)^2 - 2 * \tan(1/2*f*x) * \tan(1/2*f*x) + 1) / (\tan(1/2*f*x)^2 + 1)) + d) / (a^2*f^2 * \tan(1/2*f*x)^3 * \tan(1/2*f*x)^3 - 3*a^2*f^2 * \tan(1/2*f*x)^2 * \tan(1/2*f*x)^2 + 3*a^2*f^2 * \tan(1/2*f*x) * \tan(1/2*f*x)^3 - a^2*f^2)
\end{aligned}$$
Mupad [B]

time = 5.98, size = 247, normalized size = 1.76

$$\frac{d x^2}{2 a^2} - \frac{\frac{(c+d x) 4 i}{3 a^2 f} + \frac{e^{e^{11+f x^{11}}} (c+d x) 4 i}{3 a^2 f} + \frac{e^{e^{21+f x^{21}}} (c+d x) 4 i}{3 a^2 f}}{3 e^{e^{11+f x^{11}}} + 3 e^{e^{21+f x^{21}}} + e^{e^{31+f x^{31}}} + 1} - \frac{10 d \ln(e^{e^{11}} e^{f x^{11}} + 1)}{3 a^2 f^2} - \frac{(4 c f + 4 d f x - d 11) 2 i}{3 a^2 f^2 (e^{e^{11+f x^{11}}} + 1)} + \frac{(c f + d f x - d 11) 2 i}{3 a^2 f^2 (2 e^{e^{11+f x^{11}}} + e^{e^{21+f x^{21}}} + 1)} + \frac{x (3 c f + d 10 i)}{3 a^2 f}$$

Verification of antiderivative is not currently implemented for this CAS.

```
[In] int((c + d*x)/(a + a/cos(e + f*x))^2,x)
[Out] (d*x^2)/(2*a^2) - (((c + d*x)*4i)/(3*a^2*f) + (exp(e*1i + f*x*1i)*(c + d*x)*4i)/(3*a^2*f) + (exp(e*2i + f*x*2i)*(c + d*x)*4i)/(3*a^2*f))/((3*exp(e*1i + f*x*1i) + 3*exp(e*2i + f*x*2i) + exp(e*3i + f*x*3i) + 1) - (10*d*log(exp(e*1i)*exp(f*x*1i) + 1))/(3*a^2*f^2) - ((4*c*f - d*1i + 4*d*f*x)*2i)/(3*a^2*f^2*2*(exp(e*1i + f*x*1i) + 1)) + ((c*f - d*1i + d*f*x)*2i)/(3*a^2*f^2*2*(2*exp(e*1i + f*x*1i) + exp(e*2i + f*x*2i) + 1)) + (x*(d*10i + 3*c*f))/(3*a^2*f))

```

3.19 $\int \frac{1}{(c+dx)(a+a \sec(e+fx))^2} dx$

Optimal. Leaf size=23

$$\text{Int}\left(\frac{1}{(c+dx)(a+a \sec(e+fx))^2}, x\right)$$

[Out] Unintegrable(1/(d*x+c)/(a+a*sec(f*x+e))^2,x)

Rubi [A]

time = 0.04, antiderivative size = 0, normalized size of antiderivative = 0.00, number of steps used = 0, number of rules used = 0, integrand size = 0, $\frac{\text{number of rules}}{\text{integrand size}}$ = 0.000, Rules used = {}

$$\int \frac{1}{(c+dx)(a+a \sec(e+fx))^2} dx$$

Verification is not applicable to the result.

[In] Int[1/((c + d*x)*(a + a*Sec[e + f*x])^2),x]

[Out] Defer[Int][1/((c + d*x)*(a + a*Sec[e + f*x])^2), x]

Rubi steps

$$\int \frac{1}{(c+dx)(a+a \sec(e+fx))^2} dx = \int \frac{1}{(c+dx)(a+a \sec(e+fx))^2} dx$$

Mathematica [A]

time = 14.80, size = 0, normalized size = 0.00

$$\int \frac{1}{(c+dx)(a+a \sec(e+fx))^2} dx$$

Verification is not applicable to the result.

[In] Integrate[1/((c + d*x)*(a + a*Sec[e + f*x])^2),x]

[Out] Integrate[1/((c + d*x)*(a + a*Sec[e + f*x])^2), x]

Maple [A]

time = 0.30, size = 0, normalized size = 0.00

$$\int \frac{1}{(dx+c)(a+a \sec (fx+e))^2} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\int \frac{1}{(d*x+c)/(a+a*\sec(f*x+e))^2} dx$
[Out] $\int \frac{1}{(d*x+c)/(a+a*\sec(f*x+e))^2} dx$

Maxima [A]

time = 0.00, size = 0, normalized size = 0.00

Failed to integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}(1/(d*x+c)/(a+a*\sec(f*x+e))^2, x, \text{algorithm}=\text{"maxima"})$
[Out]
$$\begin{aligned} & 1/3*(3*(d^3*f^3*x^3 + 3*c*d^2*f^3*x^2 + 3*c^2*d*f^3*x + c^3*f^3)*\cos(3*f*x + 3*e)^2*\log(d*x + c) + 3*(d^3*f^3*x^3 + 3*c*d^2*f^3*x^2 + 3*c^2*d*f^3*x + c^3*f^3)*\log(d*x + c)*\sin(3*f*x + 3*e)^2 + 3*(2*d^3*f*x + 2*c*d^2*f + 9*(d^3*f^3*x^3 + 3*c*d^2*f^3*x^2 + 3*c^2*d*f^3*x + c^3*f^3)*\log(d*x + c))*\cos(2*f*x + 2*e)^2 + 3*(2*d^3*f*x + 2*c*d^2*f + 9*(d^3*f^3*x^3 + 3*c*d^2*f^3*x^2 + 3*c^2*d*f^3*x + c^3*f^3)*\log(d*x + c))*\cos(f*x + e)^2 + 3*(2*d^3*f*x + 2*c*d^2*f + 9*(d^3*f^3*x^3 + 3*c*d^2*f^3*x^2 + 3*c^2*d*f^3*x + c^3*f^3)*\log(d*x + c))*\sin(2*f*x + 2*e)^2 + 3*(2*d^3*f*x + 2*c*d^2*f + 9*(d^3*f^3*x^3 + 3*c*d^2*f^3*x^2 + 3*c^2*d*f^3*x + c^3*f^3)*\log(d*x + c))*\sin(f*x + e)^2 + 2*((d^3*f*x + c*d^2*f + 9*(d^3*f^3*x^3 + 3*c*d^2*f^3*x^2 + 3*c^2*d*f^3*x + c^3*f^3)*\log(d*x + c))*\cos(2*f*x + 2*e) + (d^3*f*x + c*d^2*f + 9*(d^3*f^3*x^3 + 3*c*d^2*f^3*x^2 + 3*c^2*d*f^3*x + c^3*f^3)*\log(d*x + c))*\cos(f*x + e) + 3*(d^3*f^3*x^3 + 3*c*d^2*f^3*x^2 + 3*c^2*d*f^3*x + c^3*f^3)*\log(d*x + c) + 2*(3*d^3*f^2*x^2 + 6*c*d^2*f^2*x + 3*c^2*d*f^2 - d^3)*\sin(2*f*x + 2*e) + (9*d^3*f^2*x^2 + 18*c*d^2*f^2*x + 9*c^2*d*f^2 - 4*d^3)*\sin(f*x + e))*\cos(3*f*x + 3*e) + 2*(d^3*f*x + c*d^2*f + 3*(2*d^3*f*x + 2*c*d^2*f + 9*(d^3*f^3*x^3 + 3*c*d^2*f^3*x^2 + 3*c^2*d*f^3*x + c^3*f^3)*\log(d*x + c))*\cos(2*f*x + 2*e) + 3*c*d^2*f^3*x^2 + 3*c^2*d*f^3*x + c^3*f^3)*\log(d*x + c))*\cos(f*x + e) + 9*(d^3*f^3*x^3 + 3*c*d^2*f^3*x^2 + 3*c^2*d*f^3*x + c^3*f^3)*\log(d*x + c) + 3*(3*d^3*f^2*x^2 + 6*c*d^2*f^2*x + 3*c^2*d*f^2 - 2*d^3)*\sin(f*x + e))*\cos(2*f*x + 2*e) + 2*(d^3*f*x + c*d^2*f + 9*(d^3*f^3*x^3 + 3*c*d^2*f^3*x^2 + 3*c^2*d*f^3*x + c^3*f^3)*\log(d*x + c))*\cos(f*x + e) - 3*(a^2*d^4*f^3*x^3 + 3*a^2*c*d^3*f^3*x^2 + 3*a^2*c*d^3*f^3*x + 3*a^2*c*d^3*f^3*x^2 + 3*a^2*c^2*d^2*f^3*x + a^2*c^2*d*f^3)*\cos(3*f*x + 3*e))^2 + 9*(a^2*d^4*f^3*x^3 + 3*a^2*c*d^3*f^3*x^2 + 3*a^2*c^2*d^2*f^3*x + a^2*c^3*f^3)*\cos(3*f*x + 3*e) + 9*(a^2*d^4*f^3*x^3 + 3*a^2*c^2*d^3*f^3*x^2 + 3*a^2*c^2*d^3*f^3*x + 3*a^2*c^2*d^3*f^3*x^2 + 3*a^2*c^2*d^2*f^3*x + a^2*c^3*d*f^3)*\cos(2*f*x + 2*e)^2 + 9*(a^2*d^4*f^3*x^3 + 3*a^2*c^2*d^3*f^3*x^2 + 3*a^2*c^2*d^3*f^3*x + 3*a^2*c^2*d^3*f^3*x^2 + 3*a^2*c^2*d^2*f^3*x + a^2*c^3*d*f^3)*\cos(f*x + e)^2 + (a^2*d^4*f^3*x^3 + 3*a^2*c^2*d^3*f^3*x^2 + 3*a^2*c^2*d^3*f^3*x + 3*a^2*c^2*d^3*f^3*x^2 + 3*a^2*c^2*d^2*f^3*x + a^2*c^3*d*f^3)*\sin(3*f*x + 3*e)^2 + 9*(a^2*d^4*f^3*x^3 + 3*a^2*c^2*d^3*f^3*x^2 + 3*a^2*c^2*d^3*f^3*x + 3*a^2*c^2*d^3*f^3*x^2 + 3*a^2*c^2*d^2*f^3*x + a^2*c^3*d*f^3)*\sin(2*f*x + 2*e)^2 + 18*(a^2*d^4*f^3*x^3 + 3*a^2*c^2*d^3*f^3*x^2 + 3*a^2*c^2*d^3*f^3*x + 3*a^2*c^2*d^3*f^3*x^2 + 3*a^2*c^2*d^2*f^3*x + a^2*c^3*d*f^3)*\sin(2*f*x + 2*e))*\sin(f*x + e) + 9*(a^2*d^4*f^3*x^3 + 3*a^2*c^2*d^3*f^3*x^2 + 3*a^2*c^2*d^3*f^3*x + 3*a^2*c^2*d^3*f^3*x^2 + 3*a^2*c^2*d^2*f^3*x + a^2*c^3*d*f^3)*\sin(3*f*x + 3*e) + 2*(a^2*d^4*f^3*x^3 + 3*a^2*c^2*d^3*f^3*x^2 + 3*a^2*c^2*d^3*f^3*x + 3*a^2*c^2*d^3*f^3*x^2 + 3*a^2*c^2*d^2*f^3*x + a^2*c^3*d*f^3)*\cos(2*f*x + 2*e)^2 + 3*(a^2*d^4*f^3*x^3 + 3*a^2*c^2*d^3*f^3*x^2 + 3*a^2*c^2*d^3*f^3*x + 3*a^2*c^2*d^3*f^3*x^2 + 3*a^2*c^2*d^2*f^3*x + a^2*c^3*d*f^3)*\cos(2*f*x + 2*e) + 3*(a^2*d^4*f^3*x^3 + 3*a^2*c^2*d^3*f^3*x^2 + 3*a^2*c^2*d^3*f^3*x + 3*a^2*c^2*d^3*f^3*x^2 + 3*a^2*c^2*d^2*f^3*x + a^2*c^3*d*f^3)*\cos(2*f*x + 2*e) + 3*(a^2*d^4*f^3*x^3 + 3*a^2*c^2*d^3*f^3*x^2 + 3*a^2*c^2*d^3*f^3*x + 3*a^2*c^2*d^3*f^3*x^2 + 3*a^2*c^2*d^2*f^3*x + a^2*c^3*d*f^3)*\cos(2*f*x + 2*e) + 3*(a^2*d^4*f^3*x^3 + 3*a^2*c^2*d^3*f^3*x^2 + 3*a^2*c^2*d^3*f^3*x + 3*a^2*c^2*d^3*f^3*x^2 + 3*a^2*c^2*d^2*f^3*x + a^2*c^3*d*f^3)*\cos(2*f*x + 2*e))$$

$$\begin{aligned}
& 3*f^3*x^2 + 3*a^2*c^2*d^2*f^3*x + a^2*c^3*d*f^3)*cos(f*x + e))*cos(3*f*x + \\
& 3*e) + 6*(a^2*d^4*f^3*x^3 + 3*a^2*c*d^3*f^3*x^2 + 3*a^2*c^2*d^2*f^3*x + a^2 \\
& *c^3*d*f^3 + 3*(a^2*d^4*f^3*x^3 + 3*a^2*c*d^3*f^3*x^2 + 3*a^2*c^2*d^2*f^3*x \\
& + a^2*c^3*d*f^3)*cos(f*x + e))*cos(2*f*x + 2*e) + 6*(a^2*d^4*f^3*x^3 + 3*a \\
& ^2*c*d^3*f^3*x^2 + 3*a^2*c^2*d^2*f^3*x + a^2*c^3*d*f^3)*cos(f*x + e) + 6*((\\
& a^2*d^4*f^3*x^3 + 3*a^2*c*d^3*f^3*x^2 + 3*a^2*c^2*d^2*f^3*x + a^2*c^3*d*f^3 \\
&)*sin(2*f*x + 2*e) + (a^2*d^4*f^3*x^3 + 3*a^2*c*d^3*f^3*x^2 + 3*a^2*c^2*d^2 \\
& *f^3*x + a^2*c^3*d*f^3)*sin(f*x + e))*sin(3*f*x + 3*e))*integrate(2/3*(5*d^ \\
& 3*f^2*x^2 + 10*c*d^2*f^2*x + 5*c^2*d*f^2 - 6*d^3)*sin(f*x + e)/(a^2*d^4*f^3 \\
& *x^4 + 4*a^2*c*d^3*f^3*x^3 + 6*a^2*c^2*d^2*f^3*x^2 + 4*a^2*c^3*d*f^3*x + a^ \\
& 2*c^4*f^3 + (a^2*d^4*f^3*x^4 + 4*a^2*c*d^3*f^3*x^3 + 6*a^2*c^2*d^2*f^3*x^2 \\
& + 4*a^2*c^3*d*f^3*x + a^2*c^4*f^3)*cos(f*x + e)^2 + (a^2*d^4*f^3*x^4 + 4*a^ \\
& 2*c*d^3*f^3*x^3 + 6*a^2*c^2*d^2*f^3*x^2 + 4*a^2*c^3*d*f^3*x + a^2*c^4*f^3)* \\
& sin(f*x + e)^2 + 2*(a^2*d^4*f^3*x^4 + 4*a^2*c*d^3*f^3*x^3 + 6*a^2*c^2*d^2*f^ \\
& ^3*x^2 + 4*a^2*c^3*d*f^3*x + a^2*c^4*f^3)*cos(f*x + e)), x) + 3*(d^3*f^3*x^ \\
& 3 + 3*c*d^2*f^3*x^2 + 3*c^2*d*f^3*x + c^3*f^3)*log(d*x + c) - 2*(5*d^3*f^2* \\
& x^2 + 10*c*d^2*f^2*x + 5*c^2*d*f^2 - 2*d^3 + 2*(3*d^3*f^2*x^2 + 6*c*d^2*f^2* \\
& *x + 3*c^2*d*f^2 - d^3)*cos(2*f*x + 2*e) + (9*d^3*f^2*x^2 + 18*c*d^2*f^2*x \\
& + 9*c^2*d*f^2 - 4*d^3)*cos(f*x + e) - (d^3*f*x + c*d^2*f + 9*(d^3*f^3*x^3 + \\
& 3*c*d^2*f^3*x^2 + 3*c^2*d*f^3*x + c^3*f^3)*log(d*x + c))*sin(2*f*x + 2*e) \\
& - (d^3*f*x + c*d^2*f + 9*(d^3*f^3*x^3 + 3*c*d^2*f^3*x^2 + 3*c^2*d*f^3*x + c \\
& ^3*f^3)*log(d*x + c))*sin(3*f*x + 3*e) - 2*(9*d^3*f^2*x^2 + 1 \\
& 8*c*d^2*f^2*x + 9*c^2*d*f^2 - 4*d^3 + 3*(3*d^3*f^2*x^2 + 6*c*d^2*f^2*x + 3* \\
& c^2*d*f^2 - 2*d^3)*cos(f*x + e) - 3*(2*d^3*f*x + 2*c*d^2*f + 9*(d^3*f^3*x^3 \\
& + 3*c*d^2*f^3*x^2 + 3*c^2*d*f^3*x + c^3*f^3)*log(d*x + c))*sin(f*x + e))*s \\
& in(2*f*x + 2*e) - 4*(3*d^3*f^2*x^2 + 6*c*d^2*f^2*x + 3*c^2*d*f^2 - d^3)*sin \\
& (f*x + e))/(a^2*d^4*f^3*x^3 + 3*a^2*c*d^3*f^3*x^2 + 3*a^2*c^2*d^2*f^3*x + a \\
& ^2*c^3*d*f^3 + (a^2*d^4*f^3*x^3 + 3*a^2*c*d^3*f^3*x^2 + 3*a^2*c^2*d^2*f^3*x \\
& + a^2*c^3*d*f^3)*cos(3*f*x + 3*e)^2 + 9*(a^2*d^4*f^3*x^3 + 3*a^2*c*d^3*f^3 \\
& *x^2 + 3*a^2*c^2*d^2*f^3*x + a^2*c^3*d*f^3)*cos(2*f*x + 2*e)^2 + 9*(a^2*d^4 \\
& *f^3*x^3 + 3*a^2*c*d^3*f^3*x^2 + 3*a^2*c^2*d^2*f^3*x + a^2*c^3*d*f^3)*cos(f \\
& *x + e)^2 + (a^2*d^4*f^3*x^3 + 3*a^2*c*d^3*f^3*x^2 + 3*a^2*c^2*d^2*f^3*x + a^ \\
& 2*c^3*d*f^3)*sin(3*f*x + 3*e)^2 + 9*(a^2*d^4*...
\end{aligned}$$
Fricas [A]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate(1/(d*x+c)/(a+a*sec(f*x+e))^2,x, algorithm="fricas")`
[Out] `integral(1/(a^2*d*x + a^2*c + (a^2*d*x + a^2*c)*sec(f*x + e)^2 + 2*(a^2*d*x + a^2*c)*sec(f*x + e)), x)`

Sympy [A]

time = 0.00, size = 0, normalized size = 0.00

$$\int \frac{1}{c \sec^2(e+fx) + 2c \sec(e+fx) + c + dx \sec^2(e+fx) + 2dx \sec(e+fx) + dx} dx$$

$$a^2$$

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate(1/(d*x+c)/(a+a*sec(f*x+e))**2,x)`

[Out] `Integral(1/(c*sec(e + f*x)**2 + 2*c*sec(e + f*x) + c + d*x*sec(e + f*x)**2 + 2*d*x*sec(e + f*x) + d*x), x)/a**2`

Giac [A]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate(1/(d*x+c)/(a+a*sec(f*x+e))^2,x, algorithm="giac")`

[Out] `integrate(1/((d*x + c)*(a*sec(f*x + e) + a)^2), x)`

Mupad [A]

time = 0.00, size = -1, normalized size = -0.04

$$\int \frac{1}{\left(a + \frac{a}{\cos(e+fx)}\right)^2 (c + dx)} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] `int(1/((a + a/cos(e + f*x))^2*(c + d*x)),x)`

[Out] `int(1/((a + a/cos(e + f*x))^2*(c + d*x)), x)`

3.20 $\int \frac{1}{(c+dx)^2(a+a \sec(e+fx))^2} dx$

Optimal. Leaf size=23

$$\text{Int}\left(\frac{1}{(c+dx)^2(a+a \sec(e+fx))^2}, x\right)$$

[Out] Unintegrable($1/(d*x+c)^2/(a+a*\sec(f*x+e))^2$, x)

Rubi [A]

time = 0.04, antiderivative size = 0, normalized size of antiderivative = 0.00, number of steps used = 0, number of rules used = 0, integrand size = 0, $\frac{\text{number of rules}}{\text{integrand size}}$ = 0.000, Rules used = {}

$$\int \frac{1}{(c+dx)^2(a+a \sec(e+fx))^2} dx$$

Verification is not applicable to the result.

[In] Int[$1/((c+d*x)^2*(a+a*\text{Sec}[e+f*x])^2)$, x]

[Out] Defер[Int][$1/((c+d*x)^2*(a+a*\text{Sec}[e+f*x])^2)$, x]

Rubi steps

$$\int \frac{1}{(c+dx)^2(a+a \sec(e+fx))^2} dx = \int \frac{1}{(c+dx)^2(a+a \sec(e+fx))^2} dx$$

Mathematica [A]

time = 17.12, size = 0, normalized size = 0.00

$$\int \frac{1}{(c+dx)^2(a+a \sec(e+fx))^2} dx$$

Verification is not applicable to the result.

[In] Integrate[$1/((c+d*x)^2*(a+a*\text{Sec}[e+f*x])^2)$, x]

[Out] Integrate[$1/((c+d*x)^2*(a+a*\text{Sec}[e+f*x])^2)$, x]

Maple [A]

time = 0.29, size = 0, normalized size = 0.00

$$\int \frac{1}{(dx+c)^2(a+a \sec(fx+e))^2} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\int \frac{1}{(dx+c)^2/(a+a\sec(fx+e))^2} dx$
[Out] $\int \frac{1}{(dx+c)^2/(a+a\sec(fx+e))^2} dx$

Maxima [A]

time = 0.00, size = 0.00

Failed to integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}(1/(dx+c)^2/(a+a\sec(fx+e))^2, x, \text{algorithm}=\text{"maxima"})$
[Out]
$$\begin{aligned} & -1/3*(3*d^3*f^3*x^3 + 9*c*d^2*f^3*x^2 + 9*c^2*d*f^3*x + 3*c^3*f^3 + 3*(d^3*f^3*x^3 + 3*c*d^2*f^3*x^2 + 3*c^2*d*f^3*x + c^3*f^3)*\cos(3*fx + 3*e)^2 + 3*(9*d^3*f^3*x^3 + 27*c*d^2*f^3*x^2 + 9*c^3*f^3 - 4*c*d^2*f + (27*c^2*d*f^3 - 4*d^3*f)*x)*\cos(2*fx + 2*e)^2 + 3*(9*d^3*f^3*x^3 + 27*c*d^2*f^3*x^2 + 9*c^3*f^3 - 4*c*d^2*f + (27*c^2*d*f^3 - 4*d^3*f)*x)*\cos(fx + e)^2 + 3*(d^3*f^3*x^3 + 3*c*d^2*f^3*x^2 + 3*c^2*d*f^3*x + c^3*f^3)*\sin(3*fx + 3*e)^2 + 3*(9*d^3*f^3*x^3 + 27*c*d^2*f^3*x^2 + 9*c^3*f^3 - 4*c*d^2*f + (27*c^2*d*f^3 - 4*d^3*f)*x)*\sin(2*fx + 2*e)^2 + 3*(9*d^3*f^3*x^3 + 27*c*d^2*f^3*x^2 + 9*c^3*f^3 + (9*d^3*f^3*x^3 + 27*c*d^2*f^3*x^2 + 9*c^3*f^3 - 2*c*d^2*f + (27*c^2*d*f^3 - 4*d^3*f)*x)*\sin(fx + e)^2 + 2*(3*d^3*f^3*x^3 + 9*c*d^2*f^3*x^2 + 9*c^2*d*f^3*x + 3*c^3*f^3 + (9*d^3*f^3*x^3 + 27*c*d^2*f^3*x^2 + 9*c^3*f^3 - 2*c*d^2*f + (27*c^2*d*f^3 - 4*d^3*f)*x)*\sin(2*fx + 2*e) + (9*d^3*f^3*x^3 + 27*c*d^2*f^3*x^2 + 9*c^3*f^3 - 2*c*d^2*f + (27*c^2*d*f^3 - 2*d^3*f)*x)*\cos(fx + e) - 6*(d^3*f^2*x^2 + 2*c*d^2*f^2*x + c^2*d*f^2 - d^3)*\sin(2*fx + 2*e) - 3*(3*d^3*f^2*x^2 + 6*c*d^2*f^2*x + 3*c^2*d*f^2 - 4*d^3)*\sin(fx + e))*\cos(3*fx + 3*e) + 2*(9*d^3*f^3*x^3 + 27*c*d^2*f^3*x^2 + 9*c^3*f^3 - 2*c*d^2*f + (27*c^2*d*f^3 - 2*d^3*f)*x)*\cos(2*fx + 2*e) + 9*(d^3*f^2*x^2 + 2*c*d^2*f^2*x + c^2*d*f^2 - 2*d^3)*\sin(fx + e) - 9*(d^3*f^2*x^2 + 2*c*d^2*f^2*x + c^2*d*f^2 - 2*d^3)*\sin(2*fx + 2*e) + 2*(9*d^3*f^3*x^3 + 27*c*d^2*f^3*x^2 + 9*c^3*f^3 - 2*c*d^2*f + (27*c^2*d*f^3 - 2*d^3*f)*x)*\cos(fx + e) + 3*(a^2*d^5*f^3*x^4 + 4*a^2*c*d^4*f^3*x^3 + 6*a^2*c^2*d^3*f^3*x^2 + 4*a^2*c^3*d^2*f^3*x + a^2*c^4*d*f^3 + (a^2*d^5*f^3*x^4 + 4*a^2*c*d^4*f^3*x^3 + 6*a^2*c^2*d^3*f^3*x^2 + 4*a^2*c^3*d^2*f^3*x^2 + 4*a^2*c^4*d*f^3)*\cos(3*fx + 3*e)^2 + 9*(a^2*d^5*f^3*x^4 + 4*a^2*c*d^4*f^3*x^3 + 6*a^2*c^2*d^3*f^3*x^2 + 4*a^2*c^3*d^2*f^3*x^2 + a^2*c^4*d*f^3)*\cos(2*fx + 2*e)^2 + 9*(a^2*d^5*f^3*x^4 + 4*a^2*c*d^4*f^3*x^3 + 6*a^2*c^2*d^3*f^3*x^2 + 4*a^2*c^3*d^2*f^3*x^2 + a^2*c^4*d*f^3)*\cos(2*fx + 2*e) + 9*(a^2*d^5*f^3*x^4 + 4*a^2*c*d^4*f^3*x^3 + 6*a^2*c^2*d^3*f^3*x^2 + 4*a^2*c^3*d^2*f^3*x^2 + a^2*c^4*d*f^3)*\sin(3*fx + 3*e)^2 + 9*(a^2*d^5*f^3*x^4 + 4*a^2*c*d^4*f^3*x^3 + 6*a^2*c^2*d^3*f^3*x^2 + 4*a^2*c^3*d^2*f^3*x^2 + a^2*c^4*d*f^3)*\sin(2*fx + 2*e)^2 + 18*(a^2*d^5*f^3*x^4 + 4*a^2*c*d^4*f^3*x^3 + 6*a^2*c^2*d^3*f^3*x^2 + 4*a^2*c^3*d^2*f^3*x^2 + 4*a^2*c^4*d*f^3)*\sin(2*fx + 2*e)*\sin(fx + e) + 9*(a^2*d^5*f^3*x^4 + 4*a^2*c*d^4*f^3*x^3 + 6*a^2*c^2*d^3*f^3*x^2 + 4*a^2*c^3*d^2*f^3*x^2 + 4*a^2*c^4*d*f^3)*\sin(fx + e)^2 + 2*(a^2*d^5*f^3*x^4 + 4*a^2*c*d^4*f^3*x^3 + 6*a^2*c^2*d^3*f^3*x^2 + 4*a^2*c^3*d^2*f^3*x^2 + 4*a^2*c^4*d*f^3)$$

$$\begin{aligned}
& x + a^2 * c^4 * d * f^3 + 3 * (a^2 * d^5 * f^3 * x^4 + 4 * a^2 * c * d^4 * f^3 * x^3 + 6 * a^2 * c^2 * d^3 * f^3 * x^2 + 4 * a^2 * c^3 * d^2 * f^3 * x + a^2 * c^4 * d * f^3) * \cos(2 * f * x + 2 * e) + 3 * (a^2 * d^5 * f^3 * x^4 + 4 * a^2 * c * d^4 * f^3 * x^3 + 6 * a^2 * c^2 * d^3 * f^3 * x^2 + 4 * a^2 * c^3 * d^2 * f^3 * x + a^2 * c^4 * d * f^3) * \cos(f * x + e)) * \cos(3 * f * x + 3 * e) + 6 * (a^2 * d^5 * f^3 * x^4 + 4 * a^2 * c * d^4 * f^3 * x^3 + 6 * a^2 * c^2 * d^3 * f^3 * x^2 + 4 * a^2 * c^3 * d^2 * f^3 * x + a^2 * c^4 * d * f^3) * \cos(f * x + e)) * \cos(2 * f * x + 2 * e) + 6 * (a^2 * d^5 * f^3 * x^4 + 4 * a^2 * c * d^4 * f^3 * x^3 + 6 * a^2 * c^2 * d^3 * f^3 * x^2 + 4 * a^2 * c^3 * d^2 * f^3 * x + a^2 * c^4 * d * f^3) * \cos(f * x + e)) * \cos(2 * f * x + 2 * e) + 6 * (a^2 * d^5 * f^3 * x^4 + 4 * a^2 * c * d^4 * f^3 * x^3 + 6 * a^2 * c^2 * d^3 * f^3 * x^2 + 4 * a^2 * c^3 * d^2 * f^3 * x + a^2 * c^4 * d * f^3) * \cos(f * x + e)) * \cos(2 * f * x + 2 * e) + 6 * ((a^2 * d^5 * f^3 * x^4 + 4 * a^2 * c * d^4 * f^3 * x^3 + 6 * a^2 * c^2 * d^3 * f^3 * x^2 + 4 * a^2 * c^3 * d^2 * f^3 * x + a^2 * c^4 * d * f^3) * \sin(2 * f * x + 2 * e) + (a^2 * d^5 * f^3 * x^4 + 4 * a^2 * c * d^4 * f^3 * x^3 + 6 * a^2 * c^2 * d^3 * f^3 * x^2 + 4 * a^2 * c^3 * d^2 * f^3 * x + a^2 * c^4 * d * f^3) * \sin(f * x + e)) * \sin(3 * f * x + 3 * e)) * \text{integrate}(4 / 3 * (5 * d^3 * f^2 * x^2 + 10 * c * d^2 * f^2 * x + 5 * c^2 * d * f^2 - 12 * d^3) * \sin(f * x + e) / (a^2 * d^5 * f^3 * x^5 + 5 * a^2 * c * d^4 * f^3 * x^4 + 10 * a^2 * c^2 * d^3 * f^3 * x^3 + 10 * a^2 * c^3 * d^2 * f^3 * x^2 + 5 * a^2 * c^4 * d * f^3 * x + a^2 * c^5 * f^3) * \cos(f * x + e))^2 + (a^2 * d^5 * f^3 * x^5 + 5 * a^2 * c * d^4 * f^3 * x^4 + 10 * a^2 * c^2 * d^3 * f^3 * x^3 + 10 * a^2 * c^3 * d^2 * f^3 * x^2 + 5 * a^2 * c^4 * d * f^3 * x + a^2 * c^5 * f^3) * \cos(f * x + e)), x) + 2 * (5 * d^3 * f^2 * x^2 + 10 * c * d^2 * f^2 * x + 5 * c^2 * d * f^2 - 6 * d^3 + 6 * (d^3 * f^2 * x^2 + 2 * c * d^2 * f^2 * x + c^2 * d * f^2 - d^3) * \cos(2 * f * x + 2 * e) + 3 * (3 * d^3 * f^2 * x^2 + 6 * c * d^2 * f^2 * x + 3 * c^2 * d * f^2 - 4 * d^3) * \cos(f * x + e) + (9 * d^3 * f^3 * x^3 + 27 * c * d^2 * f^3 * x^2 + 9 * c^3 * f^3 - 2 * c * d^2 * f + (27 * c^2 * d * f^3 - 2 * d^3 * f) * x) * \sin(2 * f * x + 2 * e) + (9 * d^3 * f^3 * x^3 + 27 * c * d^2 * f^3 * x^2 + 9 * c^3 * f^3 - 2 * c * d^2 * f + (27 * c^2 * d * f^3 - 2 * d^3 * f) * x) * \sin(f * x + 3 * e)) * \sin(3 * f * x + 3 * e) + 6 * (3 * d^3 * f^2 * x^2 + 6 * c * d^2 * f^2 * x + 3 * c^2 * d * f^2 - 4 * d^3 + 3 * (d^3 * f^2 * x^2 + 2 * c * d^2 * f^2 * x + c^2 * d * f^2 - 2 * d^3) * \cos(f * x + e) + (9 * d^3 * f^3 * x^3 + 27 * c * d^2 * f^3 * x^2 + 9 * c^3 * f^3 - 4 * c * d^2 * f + (27 * c^2 * d * f^3 - 4 * d^3 * f) * x) * \sin(f * x + e)) * \sin(2 * f * x + 2 * e) + 12 * (d^3 * f^2 * x^2 + 2 * c * d^2 * f^2 * x + c^2 * d * f^2 - d^3) * \sin(f * x + e)) / (a^2 * d^5 * f^3 * x^4 + 4 * a^2 * c * d^4 * f^3 * x^3 + 6 * a^2 * c^2 * d^3 * f^3 * x^2 + 4 * a^2 * c^3 * d^2 * f^3 * x + a^2 * c^4 * d * f^3 + (a^2 * d^5 * f^3 * x^4 + 4 * a^2 * c * d^4 * f^3 * x^3 + 6 * a^2 * c^2 * d^3 * f^3 * x^2 + 4 * a^2 * c^3 * d^2 * f^3 * x + a^2 * c^4 * d * f^3) * \dots)
\end{aligned}$$

Fricas [A]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate(1/(d*x+c)^2/(a+a*sec(f*x+e))^2,x, algorithm="fricas")
[Out] integral(1/(a^2*d^2*x^2 + 2*a^2*c*d*x + a^2*c^2 + (a^2*d^2*x^2 + 2*a^2*c*d*x + a^2*c^2)*sec(f*x + e))^2 + 2*(a^2*d^2*x^2 + 2*a^2*c*d*x + a^2*c^2)*sec(f*x + e)), x)
```

Sympy [A]

time = 0.00, size = 0, normalized size = 0.00

$$\int \frac{1}{c^2 \sec^2(e+fx) + 2c^2 \sec(e+fx) + c^2 + 2cdx \sec^2(e+fx) + 4cdx \sec(e+fx) + 2cdx + d^2 x^2 \sec^2(e+fx) + 2d^2 x^2 \sec(e+fx) + d^2 x^2} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate(1/(d*x+c)**2/(a+a*sec(f*x+e))**2,x)`

[Out] `Integral(1/(c**2*sec(e + f*x)**2 + 2*c**2*sec(e + f*x) + c**2 + 2*c*d*x*sec(e + f*x)**2 + 4*c*d*x*sec(e + f*x) + 2*c*d*x + d**2*x**2*sec(e + f*x)**2 + 2*d**2*x**2*sec(e + f*x) + d**2*x**2), x)/a**2`

Giac [A]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate(1/(d*x+c)^2/(a+a*sec(f*x+e))^2,x, algorithm="giac")`

[Out] `integrate(1/((d*x + c)^2*(a*sec(f*x + e) + a)^2), x)`

Mupad [A]

time = 0.00, size = -1, normalized size = -0.04

$$\int \frac{1}{\left(a + \frac{a}{\cos(e+fx)}\right)^2 (c + dx)^2} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] `int(1/((a + a/cos(e + f*x))^2*(c + d*x)^2),x)`

[Out] `int(1/((a + a/cos(e + f*x))^2*(c + d*x)^2), x)`

3.21 $\int (c + dx)^m (a + a \sec(e + fx))^n dx$

Optimal. Leaf size=23

$$\text{Int}((c + dx)^m (a + a \sec(e + fx))^n, x)$$

[Out] Unintegrable((d*x+c)^m*(a+a*sec(f*x+e))^n,x)

Rubi [A]

time = 0.03, antiderivative size = 0, normalized size of antiderivative = 0.00, number of steps used = 0, number of rules used = 0, integrand size = 0, $\frac{\text{number of rules}}{\text{integrand size}}$ = 0.000, Rules used = {}

$$\int (c + dx)^m (a + a \sec(e + fx))^n dx$$

Verification is not applicable to the result.

[In] Int[(c + d*x)^m*(a + a*Sec[e + f*x])^n,x]

[Out] Defer[Int][(c + d*x)^m*(a + a*Sec[e + f*x])^n, x]

Rubi steps

$$\int (c + dx)^m (a + a \sec(e + fx))^n dx = \int (c + dx)^m (a + a \sec(e + fx))^n dx$$

Mathematica [A]

time = 0.86, size = 0, normalized size = 0.00

$$\int (c + dx)^m (a + a \sec(e + fx))^n dx$$

Verification is not applicable to the result.

[In] Integrate[(c + d*x)^m*(a + a*Sec[e + f*x])^n,x]

[Out] Integrate[(c + d*x)^m*(a + a*Sec[e + f*x])^n, x]

Maple [A]

time = 0.50, size = 0, normalized size = 0.00

$$\int (dx + c)^m (a + a \sec(fx + e))^n dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\int ((d*x + c)^m * (a + a*\sec(f*x + e))^n, x)$

[Out] $\int ((d*x + c)^m * (a + a*\sec(f*x + e))^n, x)$

Maxima [A]

time = 0.00, size = 0, normalized size = 0.00

Failed to integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((d*x + c)^m * (a + a*\sec(f*x + e))^n, x, \text{algorithm}=\text{"maxima"})$

[Out] $\text{integrate}((d*x + c)^m * (a*\sec(f*x + e) + a)^n, x)$

Fricas [A]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((d*x + c)^m * (a + a*\sec(f*x + e))^n, x, \text{algorithm}=\text{"fricas"})$

[Out] $\text{integral}((d*x + c)^m * (a*\sec(f*x + e) + a)^n, x)$

Sympy [F(-1)] Timed out

time = 0.00, size = 0, normalized size = 0.00

Timed out

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((d*x + c)^{**m} * (a + a*\sec(f*x + e))^{**n}, x)$

[Out] Timed out

Giac [A]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((d*x + c)^m * (a + a*\sec(f*x + e))^n, x, \text{algorithm}=\text{"giac"})$

[Out] $\text{integrate}((d*x + c)^m * (a*\sec(f*x + e) + a)^n, x)$

Mupad [A]

time = 0.00, size = -1, normalized size = -0.04

$$\int \left(a + \frac{a}{\cos(e + f x)} \right)^n (c + d x)^m dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{int}((a + a/\cos(e + f*x))^n * (c + d*x)^m, x)$

[Out] $\text{int}((a + a/\cos(e + f*x))^n * (c + d*x)^m, x)$

3.22 $\int (c + dx)^m (a + a \sec(e + fx)) dx$

Optimal. Leaf size=21

$$\text{Int}((c + dx)^m(a + a \sec(e + fx)), x)$$

[Out] Unintegrable((d*x+c)^m*(a+a*sec(f*x+e)),x)

Rubi [A]

time = 0.02, antiderivative size = 0, normalized size of antiderivative = 0.00, number of steps used = 0, number of rules used = 0, integrand size = 0, $\frac{\text{number of rules}}{\text{integrand size}}$ = 0.000, Rules used = {}

$$\int (c + dx)^m (a + a \sec(e + fx)) dx$$

Verification is not applicable to the result.

[In] Int[(c + d*x)^m*(a + a*Sec[e + f*x]),x]

[Out] Defer[Int][(c + d*x)^m*(a + a*Sec[e + f*x]), x]

Rubi steps

$$\int (c + dx)^m (a + a \sec(e + fx)) dx = \int (c + dx)^m (a + a \sec(e + fx)) dx$$

Mathematica [A]

time = 6.58, size = 0, normalized size = 0.00

$$\int (c + dx)^m (a + a \sec(e + fx)) dx$$

Verification is not applicable to the result.

[In] Integrate[(c + d*x)^m*(a + a*Sec[e + f*x]),x]

[Out] Integrate[(c + d*x)^m*(a + a*Sec[e + f*x]), x]

Maple [A]

time = 0.31, size = 0, normalized size = 0.00

$$\int (dx + c)^m (a + a \sec(fx + e)) dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\int ((d*x + c)^m * (a + a*\sec(f*x + e)), x)$
[Out] $\int ((d*x + c)^m * (a + a*\sec(f*x + e)), x)$

Maxima [A]

time = 0.00, size = 0, normalized size = 0.00

Failed to integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((d*x + c)^m * (a + a*\sec(f*x + e)), x, \text{algorithm}=\text{"maxima"})$
[Out] $2*a*\text{integrate}(((d*x + c)^m * \cos(2*f*x + 2*e)*\cos(f*x + e) + (d*x + c)^m * \sin(2*f*x + 2*e)*\sin(f*x + e) + (d*x + c)^m * \cos(f*x + e))/(cos(2*f*x + 2*e)^2 + \sin(2*f*x + 2*e)^2 + 2*\cos(2*f*x + 2*e) + 1), x) + (d*x + c)^{(m + 1)}*a/(d*(m + 1))$

Fricas [A]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((d*x + c)^m * (a + a*\sec(f*x + e)), x, \text{algorithm}=\text{"fricas"})$
[Out] $\text{integral}((a*\sec(f*x + e) + a)*(d*x + c)^m, x)$

Sympy [A]

time = 0.00, size = 0, normalized size = 0.00

$$a \left(\int (c + dx)^m \sec(e + fx) dx + \int (c + dx)^m dx \right)$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((d*x + c)^{**m} * (a + a*\sec(f*x + e)), x)$
[Out] $a*(\text{Integral}((c + d*x)^{**m} * \sec(e + f*x), x) + \text{Integral}((c + d*x)^{**m}, x))$

Giac [A]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((d*x + c)^m * (a + a*\sec(f*x + e)), x, \text{algorithm}=\text{"giac"})$
[Out] $\text{integrate}((a*\sec(f*x + e) + a)*(d*x + c)^m, x)$

Mupad [A]

time = 0.00, size = -1, normalized size = -0.05

$$\int \left(a + \frac{a}{\cos(e + f x)} \right) (c + d x)^m dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] int((a + a/cos(e + f*x))*(c + d*x)^m,x)

[Out] int((a + a/cos(e + f*x))*(c + d*x)^m, x)

3.23 $\int \frac{(c+dx)^m}{a+a \sec(e+fx)} dx$

Optimal. Leaf size=23

$$\text{Int}\left(\frac{(c+dx)^m}{a+a \sec(e+fx)}, x\right)$$

[Out] Unintegrable((d*x+c)^m/(a+a*sec(f*x+e)),x)

Rubi [A]

time = 0.04, antiderivative size = 0, normalized size of antiderivative = 0.00, number of steps used = 0, number of rules used = 0, integrand size = 0, $\frac{\text{number of rules}}{\text{integrand size}} = 0.000$, Rules used = {}

$$\int \frac{(c+dx)^m}{a+a \sec(e+fx)} dx$$

Verification is not applicable to the result.

[In] Int[(c + d*x)^m/(a + a*Sec[e + f*x]),x]

[Out] Defer[Int][(c + d*x)^m/(a + a*Sec[e + f*x]), x]

Rubi steps

$$\int \frac{(c+dx)^m}{a+a \sec(e+fx)} dx = \int \frac{(c+dx)^m}{a+a \sec(e+fx)} dx$$

Mathematica [A]

time = 0.96, size = 0, normalized size = 0.00

$$\int \frac{(c+dx)^m}{a+a \sec(e+fx)} dx$$

Verification is not applicable to the result.

[In] Integrate[(c + d*x)^m/(a + a*Sec[e + f*x]),x]

[Out] Integrate[(c + d*x)^m/(a + a*Sec[e + f*x]), x]

Maple [A]

time = 0.29, size = 0, normalized size = 0.00

$$\int \frac{(dx+c)^m}{a+a \sec(fx+e)} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\int ((d*x+c)^m / (a+a*\sec(f*x+e)), x)$

[Out] $\int ((d*x+c)^m / (a+a*\sec(f*x+e)), x)$

Maxima [A]

time = 0.00, size = 0, normalized size = 0.00

Failed to integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((d*x+c)^m / (a+a*\sec(f*x+e)), x, \text{algorithm}=\text{"maxima"})$

[Out] $\text{integrate}((d*x + c)^m / (a*\sec(f*x + e) + a), x)$

Fricas [A]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((d*x+c)^m / (a+a*\sec(f*x+e)), x, \text{algorithm}=\text{"fricas"})$

[Out] $\text{integral}((d*x + c)^m / (a*\sec(f*x + e) + a), x)$

Sympy [A]

time = 0.00, size = 0, normalized size = 0.00

$$\frac{\int \frac{(c+dx)^m}{\sec(e+fx)+1} dx}{a}$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((d*x+c)^m / (a+a*\sec(f*x+e)), x)$

[Out] $\text{Integral}((c + d*x)^m / (\sec(e + f*x) + 1), x)/a$

Giac [A]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((d*x+c)^m / (a+a*\sec(f*x+e)), x, \text{algorithm}=\text{"giac"})$

[Out] $\text{integrate}((d*x + c)^m / (a*\sec(f*x + e) + a), x)$

Mupad [A]

time = 0.00, size = -1, normalized size = -0.04

$$\int \frac{(c + d x)^m}{a + \frac{a}{\cos(e + f x)}} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\int ((c + d*x)^m / (a + a/\cos(e + f*x)), x)$

[Out] $\int ((c + d*x)^m / (a + a/\cos(e + f*x)), x)$

$$\text{3.24} \quad \int (c + dx)^3 (a + b \sec(e + fx)) dx$$

Optimal. Leaf size=227

$$\frac{a(c+dx)^4}{4d} - \frac{2ib(c+dx)^3 \operatorname{ArcTan}(e^{i(e+fx)})}{f} + \frac{3ibd(c+dx)^2 \operatorname{PolyLog}(2, -ie^{i(e+fx)})}{f^2} - \frac{3ibd(c+dx)^2 \operatorname{PolyLog}(2, ie^{i(e+fx)})}{f^2}$$

[Out] $\frac{1}{4}a*(d*x+c)^4/d - 2ib(c+dx)^3 \operatorname{ArcTan}(e^{i(e+fx)})/f + 3ibd(c+dx)^2 \operatorname{PolyLog}(2, -ie^{i(e+fx)})/f^2 - 3ibd(c+dx)^2 \operatorname{PolyLog}(2, ie^{i(e+fx)})/f^2$

Rubi [A]

time = 0.15, antiderivative size = 227, normalized size of antiderivative = 1.00, number of steps used = 11, number of rules used = 6, integrand size = 18, $\frac{\text{number of rules}}{\text{integrand size}}$ = 0.333, Rules used = {4275, 4266, 2611, 6744, 2320, 6724}

$$\frac{a(c+dx)^4}{4d} - \frac{2ib(c+dx)^3 \operatorname{ArcTan}(e^{i(e+fx)})}{f} - \frac{6bd^2(c+dx) \operatorname{Li}_3(-ie^{i(e+fx)})}{f^3} + \frac{6bd^2(c+dx) \operatorname{Li}_3(ie^{i(e+fx)})}{f^3} + \frac{3ibd(c+dx)^2 \operatorname{Li}_2(-ie^{i(e+fx)})}{f^2} - \frac{3ibd(c+dx)^2 \operatorname{Li}_2(ie^{i(e+fx)})}{f^2} - \frac{6ibd^3 \operatorname{Li}_4(-ie^{i(e+fx)})}{f^4} + \frac{6ibd^3 \operatorname{Li}_4(ie^{i(e+fx)})}{f^4}$$

Antiderivative was successfully verified.

[In] $\operatorname{Int}[(c + d*x)^3 * (a + b*\operatorname{Sec}[e + f*x]), x]$

[Out] $(a*(c + d*x)^4)/(4*d) - ((2*I)*b*(c + d*x)^3*\operatorname{ArcTan}[E^(\operatorname{I}(e + f*x))])/f + ((3*I)*b*d*(c + d*x)^2*\operatorname{PolyLog}[2, (-I)*E^(\operatorname{I}(e + f*x))])/f^2 - ((3*I)*b*d*(c + d*x)^2*\operatorname{PolyLog}[2, I*E^(\operatorname{I}(e + f*x))])/f^2 - (6*b*d^2*(c + d*x)*\operatorname{PolyLog}[3, (-I)*E^(\operatorname{I}(e + f*x))])/f^3 + (6*b*d^2*(c + d*x)*\operatorname{PolyLog}[3, I*E^(\operatorname{I}(e + f*x))])/f^3 - ((6*I)*b*d^3*\operatorname{PolyLog}[4, (-I)*E^(\operatorname{I}(e + f*x))])/f^4 + ((6*I)*b*d^3*\operatorname{PolyLog}[4, I*E^(\operatorname{I}(e + f*x))])/f^4$

Rule 2320

```
Int[u_, x_Symbol] :> With[{v = FunctionOfExponential[u, x]}, Dist[v/D[v, x], Subst[Int[FunctionOfExponentialFunction[u, x]/x, x], x, v], x]] /; FunctionOfExponentialQ[u, x] && !MatchQ[u, (w_)*((a_.)*(v_)^(n_))^(m_)] /; FreeQ[{a, m, n}, x] && IntegerQ[m*n] && !MatchQ[u, E^((c_.)*(a_.) + (b_.)*x))*(F_)[v_] /; FreeQ[{a, b, c}, x] && InverseFunctionQ[F[x]]]
```

Rule 2611

```
Int[Log[1 + (e_.)*((F_)^((c_.)*(a_.) + (b_.)*(x_)))^(n_.)]*((f_.) + (g_.)*(x_.))^(m_.), x_Symbol] :> Simplify[(-(f + g*x)^m)*(PolyLog[2, (-e)*(F^(c*(a + b*x)))^n]/(b*c*n*Log[F])), x] + Dist[g*(m/(b*c*n*Log[F])), Int[(f + g*x)^(m - 1)*PolyLog[2, (-e)*(F^(c*(a + b*x)))^n], x], x] /; FreeQ[{F, a, b, c, e, f, g, n}, x] && GtQ[m, 0]
```

Rule 4266

```
Int[csc[(e_.) + Pi*(k_.) + (f_.)*(x_.)]*((c_.) + (d_.)*(x_.))^m_, x_Symbol]
] :> Simp[-2*(c + d*x)^m*(ArcTanh[E^(I*k*Pi)*E^(I*(e + f*x))]/f), x] + (-Dist[d*(m/f), Int[(c + d*x)^(m - 1)*Log[1 - E^(I*k*Pi)*E^(I*(e + f*x))], x],
x] + Dist[d*(m/f), Int[(c + d*x)^(m - 1)*Log[1 + E^(I*k*Pi)*E^(I*(e + f*x))], x], x]) /; FreeQ[{c, d, e, f}, x] && IntegerQ[2*k] && IGtQ[m, 0]
```

Rule 4275

```
Int[(csc[(e_.) + (f_.)*(x_.)]*(b_.) + (a_.))^n*((c_.) + (d_.)*(x_.))^m_, x_Symbol]
] :> Int[ExpandIntegrand[(c + d*x)^m, (a + b*Csc[e + f*x])^n, x], x] /; FreeQ[{a, b, c, d, e, f, m}, x] && IGtQ[m, 0] && IGtQ[n, 0]
```

Rule 6724

```
Int[PolyLog[n_, (c_.)*(a_.) + (b_.)*(x_.))^p]/((d_.) + (e_.)*(x_.), x_Symbol]
] :> Simp[PolyLog[n + 1, c*(a + b*x)^p]/(e*p), x] /; FreeQ[{a, b, c, d, e, n, p}, x] && EqQ[b*d, a*e]
```

Rule 6744

```
Int[((e_.) + (f_.)*(x_.))^m*PolyLog[n_, (d_.)*((F_)^((c_.)*(a_.) + (b_.)*(x_.)))^p], x_Symbol]
] :> Simp[(e + f*x)^m*(PolyLog[n + 1, d*(F^(c*(a + b*x)))^p]/(b*c*p*Log[F])), x] - Dist[f*(m/(b*c*p*Log[F])), Int[(e + f*x)^(m - 1)*PolyLog[n + 1, d*(F^(c*(a + b*x)))^p], x], x] /; FreeQ[{F, a, b, c, d, e, f, n, p}, x] && GtQ[m, 0]
```

Rubi steps

$$\begin{aligned}
\int (c + dx)^3 (a + b \sec(e + fx)) \, dx &= \int (a(c + dx)^3 + b(c + dx)^3 \sec(e + fx)) \, dx \\
&= \frac{a(c + dx)^4}{4d} + b \int (c + dx)^3 \sec(e + fx) \, dx \\
&= \frac{a(c + dx)^4}{4d} - \frac{2ib(c + dx)^3 \tan^{-1}(e^{i(e+fx)})}{f} - \frac{(3bd) \int (c + dx)^2 \log(1 - i e^{i(e+fx)})}{f} \\
&= \frac{a(c + dx)^4}{4d} - \frac{2ib(c + dx)^3 \tan^{-1}(e^{i(e+fx)})}{f} + \frac{3ibd(c + dx)^2 \text{Li}_2(-ie^{i(e+fx)})}{f^2} \\
&= \frac{a(c + dx)^4}{4d} - \frac{2ib(c + dx)^3 \tan^{-1}(e^{i(e+fx)})}{f} + \frac{3ibd(c + dx)^2 \text{Li}_2(-ie^{i(e+fx)})}{f^2} \\
&= \frac{a(c + dx)^4}{4d} - \frac{2ib(c + dx)^3 \tan^{-1}(e^{i(e+fx)})}{f} + \frac{3ibd(c + dx)^2 \text{Li}_2(-ie^{i(e+fx)})}{f^2} \\
&= \frac{a(c + dx)^4}{4d} - \frac{2ib(c + dx)^3 \tan^{-1}(e^{i(e+fx)})}{f} + \frac{3ibd(c + dx)^2 \text{Li}_2(-ie^{i(e+fx)})}{f^2} \\
&= \frac{a(c + dx)^4}{4d} - \frac{2ib(c + dx)^3 \tan^{-1}(e^{i(e+fx)})}{f} + \frac{3ibd(c + dx)^2 \text{Li}_2(-ie^{i(e+fx)})}{f^2}
\end{aligned}$$

Mathematica [B] Both result and optimal contain complex but leaf count is larger than twice the leaf count of optimal. 474 vs. $2(227) = 454$.
time = 0.68, size = 474, normalized size = 2.09

$\frac{4a^3f^4x + 6ac^2df^3x^2 + 4acd^2f^2x^3 + ad^3f^2x^4 - 3bd^2f^2x^5 \operatorname{ArcTan}(e^{i(e+fx)}) + 12bd^2f^2x^6 \log(1 - ie^{i(e+fx)}) + 12bd^2f^2x^7 \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^8 \log(1 - ie^{i(e+fx)}) + 12bd^2f^2x^9 \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{10} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{11} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{12} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{13} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{14} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{15} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{16} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{17} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{18} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{19} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{20} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{21} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{22} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{23} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{24} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{25} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{26} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{27} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{28} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{29} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{30} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{31} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{32} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{33} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{34} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{35} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{36} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{37} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{38} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{39} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{40} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{41} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{42} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{43} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{44} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{45} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{46} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{47} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{48} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{49} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{50} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{51} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{52} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{53} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{54} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{55} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{56} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{57} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{58} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{59} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{60} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{61} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{62} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{63} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{64} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{65} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{66} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{67} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{68} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{69} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{70} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{71} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{72} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{73} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{74} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{75} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{76} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{77} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{78} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{79} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{80} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{81} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{82} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{83} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{84} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{85} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{86} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{87} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{88} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{89} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{90} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{91} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{92} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{93} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{94} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{95} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{96} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{97} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{98} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{99} \log(1 - ie^{i(e+fx)}) - 12bd^2f^2x^{100} \log(1 - ie^{i(e+fx)})}{17!}$

Antiderivative was successfully verified.

[In] `Integrate[(c + d*x)^3*(a + b*Sec[e + f*x]), x]`

[Out] $(4*a*c^3*f^4*x + 6*a*c^2*d*f^4*x^2 + 4*a*c*d^2*f^2*x^3 + a*d^3*f^4*x^4 - (I)*b*c^3*f^3*ArcTan[E^(I*(e + f*x))] + 12*b*c^2*d*f^3*x*Log[1 - E^(I*(e + f*x))] + 12*b*c*d^2*f^2*x^2*Log[1 - E^(I*(e + f*x))] + 4*b*d^3*f^3*x^3*Log[1 - E^(I*(e + f*x))] - 12*b*c^2*d*f^3*x*Log[1 + E^(I*(e + f*x))] - 12*b*c*d^2*f^3*x^2*Log[1 + E^(I*(e + f*x))] - 4*b*d^3*f^3*x^3*Log[1 + E^(I*(e + f*x))] + (12*I)*b*d*f^2*(c + d*x)^2*PolyLog[2, (-I)*E^(I*(e + f*x))] - (12*I)*b*d*f^2*(c + d*x)^2*PolyLog[2, I*E^(I*(e + f*x))] - 24*b*c*d^2*f*PolyLog[3, (-I)*E^(I*(e + f*x))] - 24*b*d^3*f*x*PolyLog[3, (-I)*E^(I*(e + f*x))] + 24*b*c*d^2*f*PolyLog[3, I*E^(I*(e + f*x))] + 24*b*d^3*f*x*PolyLog[3, I*E^(I*(e + f*x))] - (24*I)*b*d^3*PolyLog[4, (-I)*E^(I*(e + f*x))] + (24*I)*b*d^3*PolyLog[4, I*E^(I*(e + f*x))])/(4*f^4)$

Maple [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 755 vs. $2(200) = 400$.

time = 0.69, size = 756, normalized size = 3.33

method	result
risch	$-\frac{6ibc d^2 e^2 \arctan(e^{i(fx+e)})}{f^3} + \frac{6ib d^2 c \operatorname{polylog}(2, -ie^{i(fx+e)})x}{f^2} - \frac{6ib d^2 c \operatorname{polylog}(2, ie^{i(fx+e)})x}{f^2} + \frac{6ib c^2 d e \arctan(e^{i(fx+e)})}{f^2} + \dots$

Verification of antiderivative is not currently implemented for this CAS.

```
[In] int((d*x+c)^3*(a+b*sec(f*x+e)),x,method=_RETURNVERBOSE)
[Out] -6*I/f^3*b*c*d^2*e^2*arctan(exp(I*(f*x+e)))+6*I/f^2*b*d^2*c*polylog(2,-I*exp(I*(f*x+e)))*x-6*I/f^2*b*d^2*c*polylog(2,I*exp(I*(f*x+e)))*x+6*I/f^2*b*c^2*d*e*arctan(exp(I*(f*x+e)))+a*d^2*c*x^3+3/2*a*d*c^2*x^2+a*c^3*x+2*I/f^4*b*d^3*e^3*arctan(exp(I*(f*x+e)))-3*I/f^2*b*d^3*polylog(2,I*exp(I*(f*x+e)))*x^2+3*I/f^2*b*d^3*polylog(2,-I*exp(I*(f*x+e)))*x^2+3*I/f^2*b*d*c^2*polylog(2,-I*exp(I*(f*x+e)))-3*I/f^2*b*d*c^2*polylog(2,I*exp(I*(f*x+e)))-3/f*b*d*c^2*ln(1+I*exp(I*(f*x+e)))*x-3/f^2*b*d*c^2*ln(1+I*exp(I*(f*x+e)))*e+3/f^3*b*e^2*d^2*c*ln(1+I*exp(I*(f*x+e)))+3/f*b*d*c^2*ln(1-I*exp(I*(f*x+e)))*x+3/f^2*b*d*c^2*ln(1-I*exp(I*(f*x+e)))*e-3/f^3*b*e^2*d^2*c*ln(1-I*exp(I*(f*x+e)))-3/f*b*d^2*c*ln(1+I*exp(I*(f*x+e)))*x^2+3/f*b*d^2*c*ln(1-I*exp(I*(f*x+e)))*x^2-2*I/f*b*c^3*arctan(exp(I*(f*x+e)))+6*I*b*d^3*polylog(4,I*exp(I*(f*x+e)))/f^4-6*I*b*d^3*polylog(4,-I*exp(I*(f*x+e)))/f^4-1/f^4*b*e^3*d^3*ln(1+I*exp(I*(f*x+e)))+1/f^4*b*e^3*d^3*ln(1-I*exp(I*(f*x+e)))-6/f^3*b*d^2*c*polylog(3,-I*exp(I*(f*x+e)))+6/f^3*b*d^2*c*polylog(3,I*exp(I*(f*x+e)))+6/f^3*b*d^3*polylog(3,I*exp(I*(f*x+e)))*x-6/f^3*b*d^3*polylog(3,-I*exp(I*(f*x+e)))*x+1/f*b*d^3*ln(1-I*exp(I*(f*x+e)))*x^3-1/f*b*d^3*ln(1+I*exp(I*(f*x+e)))*x^3+1/4*a*d^3*x^4+1/4*a/d*c^4
```

Maxima [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 995 vs. 2(194) = 388.
time = 0.64, size = 995, normalized size = 4.38

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)^3*(a+b*sec(f*x+e)),x, algorithm="maxima")
[Out] 1/4*(4*(f*x + e)*a*c^3 + (f*x + e)^4*a*d^3/f^3 + 4*(f*x + e)^3*a*c*d^2/f^2 + 6*(f*x + e)^2*a*c^2*d/f - 4*(f*x + e)^3*a*d^3*e/f^3 - 12*(f*x + e)^2*a*c*d^2*e/f^2 - 12*(f*x + e)*a*c^2*d*e/f + 4*b*c^3*log(sec(f*x + e) + tan(f*x + e)) - 12*b*c^2*d*e*log(sec(f*x + e) + tan(f*x + e))/f + 6*(f*x + e)^2*a*d^3*e^2/f^3 + 12*(f*x + e)*a*c*d^2*e^2/f^2 + 12*b*c*d^2*e^2*log(sec(f*x + e) + tan(f*x + e))/f^2 - 4*(f*x + e)*a*d^3*e^3/f^3 - 4*b*d^3*e^3*log(sec(f*x + e) + tan(f*x + e))/f^3 + 2*(12*I*b*d^3*polylog(4, I*e^(I*f*x + I*e)) - 12*I*b*d^3*polylog(4, -I*e^(I*f*x + I*e)) - 2*(I*(f*x + e)^3*b*d^3 + 3*(I*b*c^2*f - I*b*d^3*e)*(f*x + e)^2 + 3*(I*b*c^2*d*f^2 - 2*I*b*c*d^2*f*e + I*b*d^3*e^2)*(f*x + e))*arctan2(cos(f*x + e), sin(f*x + e) + 1) - 2*(I*(f*x + e)
```

$$\begin{aligned}
& -3*b*d^3 + 3*(I*b*c*d^2*f - I*b*d^3*e)*(f*x + e)^2 + 3*(I*b*c^2*d*f^2 - 2*I \\
& *b*c*d^2*f*e + I*b*d^3*e^2)*(f*x + e))*\arctan2(\cos(f*x + e), -\sin(f*x + e) \\
& + 1) - 6*(I*(f*x + e)^2*b*d^3 + I*b*c^2*d*f^2 - 2*I*b*c*d^2*f*e + I*b*d^3*e \\
& ^2 + 2*(I*b*c*d^2*f - I*b*d^3*e)*(f*x + e))*\operatorname{dilog}(I*e^{(I*f*x + I)*e}) - 6*(- \\
& I*(f*x + e)^2*b*d^3 - I*b*c^2*d*f^2 + 2*I*b*c*d^2*f*e - I*b*d^3*e^2 + 2*(-I \\
& *b*c*d^2*f + I*b*d^3*e)*(f*x + e))*\operatorname{dilog}(-I*e^{(I*f*x + I)*e}) + ((f*x + e)^3 \\
& *b*d^3 + 3*(b*c*d^2*f - b*d^3*e)*(f*x + e)^2 + 3*(b*c^2*d*f^2 - 2*b*c*d^2*f \\
& *e + b*d^3*e^2)*(f*x + e))*\log(\cos(f*x + e)^2 + \sin(f*x + e)^2 + 2*\sin(f*x \\
& + e) + 1) - ((f*x + e)^3*b*d^3 + 3*(b*c*d^2*f - b*d^3*e)*(f*x + e)^2 + 3*(b \\
& *c^2*d*f^2 - 2*b*c*d^2*f*e + b*d^3*e^2)*(f*x + e))*\log(\cos(f*x + e)^2 + \sin \\
& (f*x + e)^2 - 2*\sin(f*x + e) + 1) + 12*((f*x + e)*b*d^3 + b*c*d^2*f - b*d^3 \\
& *e)*\operatorname{polylog}(3, I*e^{(I*f*x + I)*e}) - 12*((f*x + e)*b*d^3 + b*c*d^2*f - b*d^3 \\
& *e)*\operatorname{polylog}(3, -I*e^{(I*f*x + I)*e}))/f^3)/f
\end{aligned}$$

Fricas [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 1117 vs. $2(194) = 388$.

time = 3.22, size = 1117, normalized size = 4.92

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)^3*(a+b*sec(f*x+e)),x, algorithm="fricas")
[Out] 1/4*(a*d^3*f^4*x^4 + 4*a*c*d^2*f^4*x^3 + 6*a*c^2*d*f^4*x^2 + 4*a*c^3*f^4*x
+ 12*I*b*d^3*polylog(4, I*cos(f*x + e) + sin(f*x + e)) + 12*I*b*d^3*polylog
(4, I*cos(f*x + e) - sin(f*x + e)) - 12*I*b*d^3*polylog(4, -I*cos(f*x + e)
+ sin(f*x + e)) - 12*I*b*d^3*polylog(4, -I*cos(f*x + e) - sin(f*x + e)) - 6
*(I*b*d^3*f^2*x^2 + 2*I*b*c*d^2*f^2*x + I*b*c^2*d*f^2)*dilog(I*cos(f*x + e)
+ sin(f*x + e)) - 6*(I*b*d^3*f^2*x^2 + 2*I*b*c*d^2*f^2*x + I*b*c^2*d*f^2)*
dilog(I*cos(f*x + e) - sin(f*x + e)) - 6*(-I*b*d^3*f^2*x^2 - 2*I*b*c*d^2*f^2*
2*x - I*b*c^2*d*f^2)*dilog(-I*cos(f*x + e) + sin(f*x + e)) - 6*(-I*b*d^3*f^2*
2*x^2 - 2*I*b*c*d^2*f^2*x - I*b*c^2*d*f^2)*dilog(-I*cos(f*x + e) - sin(f*x
+ e)) + 2*(b*c^3*f^3 - 3*b*c^2*d*f^2*e + 3*b*c*d^2*f^2*e^2 - b*d^3*e^3)*log(c
os(f*x + e) + I*sin(f*x + e) + I) - 2*(b*c^3*f^3 - 3*b*c^2*d*f^2*e + 3*b*c*
d^2*f^2*e^2 - b*d^3*e^3)*log(cos(f*x + e) - I*sin(f*x + e) + I) + 2*(b*d^3*f^
3*x^3 + 3*b*c*d^2*f^3*x^2 + 3*b*c^2*d*f^3*x + 3*b*c^2*d*f^2*e - 3*b*c*d^2*f
*e^2 + b*d^3*e^3)*log(I*cos(f*x + e) + sin(f*x + e) + 1) - 2*(b*d^3*f^3*x^3
+ 3*b*c*d^2*f^3*x^2 + 3*b*c^2*d*f^3*x + 3*b*c^2*d*f^2*e - 3*b*c*d^2*f^2*e^2
+ b*d^3*e^3)*log(I*cos(f*x + e) - sin(f*x + e) + 1) + 2*(b*d^3*f^3*x^3 + 3*
b*c*d^2*f^3*x^2 + 3*b*c^2*d*f^3*x + 3*b*c^2*d*f^2*e - 3*b*c*d^2*f^2*e^2 + b*
d^3*e^3)*log(-I*cos(f*x + e) + sin(f*x + e) + 1) + 2*(b*c^3*f^3 - 3*b*c^2*d*f^2*
e + 3*b*c*d^2*f^2*e^2 - b*d^3*e^3)*log(-cos(f*x + e) + I*sin(f*x + e) + I) -
2*(b*c^3*f^3 - 3*b*c^2*d*f^2*e + 3*b*c*d^2*f^2*e^2 - b*d^3*e^3)*log(-cos(f*x
```

```
+ e) - I*sin(f*x + e) + I) - 12*(b*d^3*f*x + b*c*d^2*f)*polylog(3, I*cos(f*x + e) + sin(f*x + e)) + 12*(b*d^3*f*x + b*c*d^2*f)*polylog(3, I*cos(f*x + e) - sin(f*x + e)) - 12*(b*d^3*f*x + b*c*d^2*f)*polylog(3, -I*cos(f*x + e) + sin(f*x + e)) + 12*(b*d^3*f*x + b*c*d^2*f)*polylog(3, -I*cos(f*x + e) - sin(f*x + e)))/f^4
```

Sympy [F]

time = 0.00, size = 0, normalized size = 0.00

$$\int (a + b \sec(e + fx)) (c + dx)^3 \, dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] integrate((d*x+c)**3*(a+b*sec(f*x+e)),x)

[Out] Integral((a + b*sec(e + fx))*(c + d*x)**3, x)

Giac [F]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] integrate((d*x+c)^3*(a+b*sec(f*x+e)),x, algorithm="giac")

[Out] integrate((d*x + c)^3*(b*sec(f*x + e) + a), x)

Mupad [F]

time = 0.00, size = -1, normalized size = -0.00

$$\int \left(a + \frac{b}{\cos(e + fx)} \right) (c + dx)^3 \, dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] int((a + b/cos(e + fx))*(c + d*x)^3,x)

[Out] int((a + b/cos(e + fx))*(c + d*x)^3, x)

$$\text{3.25} \quad \int (c + dx)^2 (a + b \sec(e + fx)) dx$$

Optimal. Leaf size=157

$$\frac{a(c+dx)^3}{3d} - \frac{2ib(c+dx)^2 \operatorname{ArcTan}(e^{i(e+fx)})}{f} + \frac{2ibd(c+dx) \operatorname{PolyLog}(2, -ie^{i(e+fx)})}{f^2} - \frac{2ibd(c+dx) \operatorname{PolyLog}(2, ie^{i(e+fx)})}{f^2}$$

[Out] $\frac{1}{3} a (d*x + c)^3/d - 2*I*b*(d*x + c)^2 \operatorname{arctan}(\exp(I*(f*x + e)))/f + 2*I*b*d*(d*x + c) \operatorname{polylog}(2, -I*\exp(I*(f*x + e)))/f^2 - 2*I*b*d*(d*x + c) \operatorname{polylog}(2, I*\exp(I*(f*x + e)))/f^2 - 2*b*d^2 \operatorname{polylog}(3, -I*\exp(I*(f*x + e)))/f^3 + 2*b*d^2 \operatorname{polylog}(3, I*\exp(I*(f*x + e)))/f^3$

Rubi [A]

time = 0.10, antiderivative size = 157, normalized size of antiderivative = 1.00, number of steps used = 9, number of rules used = 5, integrand size = 18, $\frac{\text{number of rules}}{\text{integrand size}}$ = 0.278, Rules used = {4275, 4266, 2611, 2320, 6724}

$$\frac{a(c+dx)^3}{3d} - \frac{2ib(c+dx)^2 \operatorname{ArcTan}(e^{i(e+fx)})}{f} + \frac{2ibd(c+dx) \operatorname{Li}_2(-ie^{i(e+fx)})}{f^2} - \frac{2ibd(c+dx) \operatorname{Li}_2(ie^{i(e+fx)})}{f^2} - \frac{2bd^2 \operatorname{Li}_3(-ie^{i(e+fx)})}{f^3} + \frac{2bd^2 \operatorname{Li}_3(ie^{i(e+fx)})}{f^3}$$

Antiderivative was successfully verified.

[In] $\operatorname{Int}[(c + d*x)^2 * (a + b * \operatorname{Sec}[e + f*x]), x]$

[Out] $(a*(c + d*x)^3)/(3*d) - ((2*I)*b*(c + d*x)^2 * \operatorname{ArcTan}[E^{\wedge}(I*(e + f*x))])/f + ((2*I)*b*d*(c + d*x) * \operatorname{PolyLog}[2, (-I)*E^{\wedge}(I*(e + f*x))])/f^2 - ((2*I)*b*d*(c + d*x) * \operatorname{PolyLog}[2, I*E^{\wedge}(I*(e + f*x))])/f^2 - (2*b*d^2 * \operatorname{PolyLog}[3, (-I)*E^{\wedge}(I*(e + f*x))])/f^3 + (2*b*d^2 * \operatorname{PolyLog}[3, I*E^{\wedge}(I*(e + f*x))])/f^3$

Rule 2320

```
Int[u_, x_Symbol] :> With[{v = FunctionOfExponential[u, x]}, Dist[v/D[v, x], Subst[Int[FunctionOfExponentialFunction[u, x]/x, x], x, v], x]] /; FunctionOfExponentialQ[u, x] && !MatchQ[u, (w_)*((a_.)*(v_)^(n_))^(m_)] /; FreeQ[{a, m, n}, x] && IntegerQ[m*n] && !MatchQ[u, E^((c_.)*((a_.) + (b_.)*x))*(F_)[v_]] /; FreeQ[{a, b, c}, x] && InverseFunctionQ[F[x]]]
```

Rule 2611

```
Int[Log[1 + (e_.)*((F_)^((c_.)*(a_.) + (b_.)*(x_)))^(n_.)]*((f_.) + (g_.)*(x_)^(m_.), x_Symbol] :> Simp[(-(f + g*x)^m)*(\operatorname{PolyLog}[2, (-e)*(F^((c*(a + b*x)))^n)/(b*c*n*\operatorname{Log}[F])), x] + Dist[g*(m/(b*c*n*\operatorname{Log}[F])), Int[(f + g*x)^(m - 1)*\operatorname{PolyLog}[2, (-e)*(F^((c*(a + b*x)))^n)], x], x] /; FreeQ[{F, a, b, c, e, f, g, n}, x] && GtQ[m, 0]
```

Rule 4266

```
Int[csc[(e_.) + Pi*(k_.) + (f_.)*(x_)]*((c_.) + (d_.)*(x_))^(m_.), x_Symbol] :> Simp[-2*(c + d*x)^m*(\operatorname{ArcTanh}[E^{\wedge}(I*k*Pi)*E^{\wedge}(I*(e + f*x))]/f), x] + (-Di
```

```
st[d*(m/f), Int[(c + d*x)^(m - 1)*Log[1 - E^(I*k*Pi)*E^(I*(e + f*x))], x],
x] + Dist[d*(m/f), Int[(c + d*x)^(m - 1)*Log[1 + E^(I*k*Pi)*E^(I*(e + f*x))],
x], x]) /; FreeQ[{c, d, e, f}, x] && IntegerQ[2*k] && IGtQ[m, 0]
```

Rule 4275

```
Int[(csc[(e_.) + (f_.)*(x_.)]*(b_.) + (a_.))^(n_.)*((c_.) + (d_.)*(x_.))^(m_.),
x_Symbol] :> Int[ExpandIntegrand[(c + d*x)^m, (a + b*Csc[e + f*x])^n, x],
x] /; FreeQ[{a, b, c, d, e, f, m}, x] && IGtQ[m, 0] && IGtQ[n, 0]
```

Rule 6724

```
Int[PolyLog[n_, (c_.)*((a_.) + (b_.)*(x_.))^p]/((d_.) + (e_.)*(x_.)), x_Symbol] :> Simp[PolyLog[n + 1, c*(a + b*x)^p]/(e*p), x] /; FreeQ[{a, b, c, d, e, n, p}, x] && EqQ[b*d, a*e]
```

Rubi steps

$$\begin{aligned}
\int (c + dx)^2 (a + b \sec(e + fx)) \, dx &= \int (a(c + dx)^2 + b(c + dx)^2 \sec(e + fx)) \, dx \\
&= \frac{a(c + dx)^3}{3d} + b \int (c + dx)^2 \sec(e + fx) \, dx \\
&= \frac{a(c + dx)^3}{3d} - \frac{2ib(c + dx)^2 \tan^{-1}(e^{i(e+fx)})}{f} - \frac{(2bd) \int (c + dx) \log(1 - e^{i(e+fx)})}{f} \\
&= \frac{a(c + dx)^3}{3d} - \frac{2ib(c + dx)^2 \tan^{-1}(e^{i(e+fx)})}{f} + \frac{2ibd(c + dx) \text{Li}_2(-ie^{i(e+fx)})}{f^2} \\
&= \frac{a(c + dx)^3}{3d} - \frac{2ib(c + dx)^2 \tan^{-1}(e^{i(e+fx)})}{f} + \frac{2ibd(c + dx) \text{Li}_2(-ie^{i(e+fx)})}{f^2} \\
&= \frac{a(c + dx)^3}{3d} - \frac{2ib(c + dx)^2 \tan^{-1}(e^{i(e+fx)})}{f} + \frac{2ibd(c + dx) \text{Li}_2(-ie^{i(e+fx)})}{f^2}
\end{aligned}$$

Mathematica [A]

time = 0.47, size = 281, normalized size = 1.79

$$\frac{3ac^2f^3x + 3acd^2f^2x^2 + ad^2f^2x^3 - 6ibc^2f^2\text{ArcTan}(e^{i(e+fx)}) + 6bcd^2x\log(1 - ie^{i(e+fx)}) + 3bdf^2x^2\log(1 - ie^{i(e+fx)}) - 6bcd^2x^2\log(1 + ie^{i(e+fx)}) - 3bdf^2x^2\log(1 + ie^{i(e+fx)}) + 6ibdf(c + dx)\text{PolyLog}(2, -ie^{i(e+fx)}) - 6ibdf(c + dx)\text{PolyLog}(2, ie^{i(e+fx)}) - 6bd^2\text{PolyLog}(3, -ie^{i(e+fx)}) + 6bd^2\text{PolyLog}(3, ie^{i(e+fx)})}{3f^3}$$

Antiderivative was successfully verified.

[In] `Integrate[(c + d*x)^2*(a + b*Sec[e + f*x]), x]`

[Out] `(3*a*c^2*f^3*x + 3*a*c*d*f^3*x^2 + a*d^2*f^3*x^3 - (6*I)*b*c^2*f^2*ArcTan[E^(I*(e + f*x))] + 6*b*c*d*f^2*x*Log[1 - I*E^(I*(e + f*x))] + 3*b*d^2*f^2*x^3)/3f^3`

$$2 \operatorname{Log}[1 - I \operatorname{E}^{\wedge}(I \operatorname{(e + f*x))}] - 6 b c d f^2 x \operatorname{Log}[1 + I \operatorname{E}^{\wedge}(I \operatorname{(e + f*x))}] - 3 b d^2 f^2 x^2 \operatorname{Log}[1 + I \operatorname{E}^{\wedge}(I \operatorname{(e + f*x))}] + (6 I) b d f (c + d x) \operatorname{PolyLog}[2, (-I) \operatorname{E}^{\wedge}(I \operatorname{(e + f*x))}] - (6 I) b d f (c + d x) \operatorname{PolyLog}[2, I \operatorname{E}^{\wedge}(I \operatorname{(e + f*x))}] - 6 b d^2 \operatorname{PolyLog}[3, (-I) \operatorname{E}^{\wedge}(I \operatorname{(e + f*x))}] + 6 b d^2 \operatorname{PolyLog}[3, I \operatorname{E}^{\wedge}(I \operatorname{(e + f*x))})]/(3 f^3)$$

Maple [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 439 vs. 2(138) = 276.

time = 0.68, size = 440, normalized size = 2.80

method	result
risch	$\frac{ad^2x^3}{3} + adc x^2 + a c^2 x + \frac{ac^3}{3d} + \frac{bd^2 \ln(1 - ie^{i(fx+e)})x^2}{f} + \frac{2bcd \ln(1 - ie^{i(fx+e)})e}{f^2} - \frac{2ibc^2 \arctan(e^{i(fx+e)})}{f} - \frac{2ibcd \operatorname{polylog}(2, -I \operatorname{exp}(I \operatorname{(fx+e)}))}{f}$

Verification of antiderivative is not currently implemented for this CAS.

```
[In] int((d*x+c)^2*(a+b*sec(f*x+e)),x,method=_RETURNVERBOSE)
[Out] 1/3*a*d^2*x^3+a*d*c*x^2+a*c^2*x+1/3*a/d*c^3+1/f*b*d^2*ln(1-I*exp(I*(f*x+e)))
)*x^2+2/f^2*b*c*d*ln(1-I*exp(I*(f*x+e)))*e-2*I/f^2*b*c*d*polylog(2,I*exp(I*(f*x+e)))-2*I/f*b*c^2*arctan(exp(I*(f*x+e)))-2*I/f^2*b*d^2*polylog(2,I*exp(I*(f*x+e)))*x+1/f^3*b*e^2*d^2*ln(1+I*exp(I*(f*x+e)))-2*b*d^2*polylog(3,-I*exp(I*(f*x+e)))/f^3+4*I/f^2*b*c*d*e*arctan(exp(I*(f*x+e)))-1/f*b*d^2*ln(1+I*exp(I*(f*x+e)))*x^2-2*I/f^3*b*d^2*e^2*arctan(exp(I*(f*x+e)))-1/f^3*b*e^2*d^2*ln(1-I*exp(I*(f*x+e)))-2/f*b*c*d*ln(1+I*exp(I*(f*x+e)))*x+2/f*b*c*d*ln(1-I*exp(I*(f*x+e)))*x-2/f^2*b*c*d*ln(1+I*exp(I*(f*x+e)))*e+2*b*d^2*polylog(3,I*exp(I*(f*x+e)))/f^3+2*I/f^2*b*c*d*polylog(2,-I*exp(I*(f*x+e)))+2*I/f^2*b*d^2*polylog(2,-I*exp(I*(f*x+e)))*x
```

Maxima [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 559 vs. 2(134) = 268.

time = 0.59, size = 559, normalized size = 3.56

$$6(fx + e)^6 + 48b^2c^2d^2e^2 + 48b^2c^2d^2e^3 + 48b^2c^2d^2e^4 + 6bd^2\operatorname{log}(se(fx + e) + \tan(fx + e)) - 6bc^2d^2\operatorname{log}(se(fx + e) + \tan(fx + e)) + 6b^2c^2d^2e^2\operatorname{log}(se(fx + e) + \tan(fx + e)) - 6b^2c^2d^2e^3\operatorname{log}(se(fx + e) + \tan(fx + e)) + 6b^2c^2d^2e^4\operatorname{log}(se(fx + e) + \tan(fx + e)) - 6b^3c^2d^2e^2\operatorname{log}(se(fx + e) + \tan(fx + e)) + 6b^3c^2d^2e^3\operatorname{log}(se(fx + e) + \tan(fx + e)) - 6b^3c^2d^2e^4\operatorname{log}(se(fx + e) + \tan(fx + e)) + 6b^4c^2d^2e^2\operatorname{log}(se(fx + e) + \tan(fx + e)) - 6b^4c^2d^2e^3\operatorname{log}(se(fx + e) + \tan(fx + e)) + 6b^4c^2d^2e^4\operatorname{log}(se(fx + e) + \tan(fx + e))$$

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)^2*(a+b*sec(f*x+e)),x, algorithm="maxima")
[Out] 1/6*(6*(f*x + e)*a*c^2 + 2*(f*x + e)^3*a*d^2/f^2 + 6*(f*x + e)^2*a*c*d/f - 6*(f*x + e)^2*a*d^2*e/f^2 - 12*(f*x + e)*a*c*d*e/f + 6*b*c^2*log(sec(f*x + e) + tan(f*x + e)) - 12*b*c*d*e*log(sec(f*x + e) + tan(f*x + e))/f + 6*(f*x + e)*a*d^2*e^2/f^2 + 6*b*d^2*e^2*log(sec(f*x + e) + tan(f*x + e))/f^2 + 3*(4*b*d^2*polylog(3, I*e^(I*f*x + I*e)) - 4*b*d^2*polylog(3, -I*e^(I*f*x + I*e))) - 2*(I*(f*x + e)^2*b*d^2 + 2*(I*b*c*d*f - I*b*d^2*e)*(f*x + e))*arctan2(cos(f*x + e), sin(f*x + e) + 1) - 2*(I*(f*x + e)^2*b*d^2 + 2*(I*b*c*d*f - I*b*d^2*e)*(f*x + e))*arctan2(cos(f*x + e), -sin(f*x + e) + 1) - 4*(I*(f*x + e)*b*d^2 + I*b*c*d*f - I*b*d^2*e)*dilog(I*e^(I*f*x + I*e)) - 4*(-I*(f*x + e)^2*b*d^2 + I*b*c*d*f - I*b*d^2*e)*dilog(I*e^(I*f*x + I*e))
```

```
+ e)*b*d^2 - I*b*c*d*f + I*b*d^2*e)*dilog(-I*e^(I*f*x + I*e)) + ((f*x + e)^2*b*d^2 + 2*(b*c*d*f - b*d^2*e)*(f*x + e))*log(cos(f*x + e)^2 + sin(f*x + e)^2 + 2*sin(f*x + e) + 1) - ((f*x + e)^2*b*d^2 + 2*(b*c*d*f - b*d^2*e)*(f*x + e))*log(cos(f*x + e)^2 + sin(f*x + e)^2 - 2*sin(f*x + e) + 1))/f^2)/f
```

Fricas [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 707 vs. 2(134) = 268.

time = 4.61, size = 707, normalized size = 4.50

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)^2*(a+b*sec(f*x+e)),x, algorithm="fricas")
[Out] 1/6*(2*a*d^2*f^3*x^3 + 6*a*c*d*f^3*x^2 + 6*a*c^2*f^3*x - 6*b*d^2*polylog(3, I*cos(f*x + e) + sin(f*x + e)) + 6*b*d^2*polylog(3, I*cos(f*x + e) - sin(f*x + e)) - 6*b*d^2*polylog(3, -I*cos(f*x + e) + sin(f*x + e)) + 6*b*d^2*polylog(3, -I*cos(f*x + e) - sin(f*x + e)) - 6*(I*b*d^2*f*x + I*b*c*d*f)*dilog(I*cos(f*x + e) + sin(f*x + e)) - 6*(I*b*d^2*f*x + I*b*c*d*f)*dilog(I*cos(f*x + e) - sin(f*x + e)) - 6*(-I*b*d^2*f*x - I*b*c*d*f)*dilog(-I*cos(f*x + e) + sin(f*x + e)) - 6*(-I*b*d^2*f*x - I*b*c*d*f)*dilog(-I*cos(f*x + e) - sin(f*x + e)) + 3*(b*c^2*f^2 - 2*b*c*d*f*e + b*d^2*e^2)*log(cos(f*x + e) + I*sin(f*x + e) + I) - 3*(b*c^2*f^2 - 2*b*c*d*f*e + b*d^2*e^2)*log(cos(f*x + e) - I*sin(f*x + e) + I) + 3*(b*d^2*f^2*x^2 + 2*b*c*d*f^2*x + 2*b*c*d*f*e - b*d^2*e^2)*log(I*cos(f*x + e) + sin(f*x + e) + 1) - 3*(b*d^2*f^2*x^2 + 2*b*c*d*f*e - b*d^2*e^2)*log(I*cos(f*x + e) - sin(f*x + e) + 1) + 3*(b*d^2*f^2*x^2 + 2*b*c*d*f^2*x + 2*b*c*d*f*e - b*d^2*e^2)*log(-I*cos(f*x + e) + sin(f*x + e) + 1) - 3*(b*d^2*f^2*x^2 + 2*b*c*d*f^2*x + 2*b*c*d*f*e - b*d^2*e^2)*log(-I*cos(f*x + e) - sin(f*x + e) + 1) + 3*(b*c^2*f^2 - 2*b*c*d*f*e + b*d^2*e^2)*log(-cos(f*x + e) + I*sin(f*x + e) + I) - 3*(b*c^2*f^2 - 2*b*c*d*f*e + b*d^2*e^2)*log(-cos(f*x + e) - I*sin(f*x + e) + I))/f^3
```

Sympy [F]

time = 0.00, size = 0, normalized size = 0.00

$$\int (a + b \sec(e + fx)) (c + dx)^2 \, dx$$

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)**2*(a+b*sec(f*x+e)),x)
```

```
[Out] Integral((a + b*sec(e + fx))*(c + d*x)**2, x)
```

Giac [F]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate((d*x+c)^2*(a+b*sec(f*x+e)),x, algorithm="giac")`
[Out] `integrate((d*x + c)^2*(b*sec(f*x + e) + a), x)`

Mupad [F]

time = 0.00, size = -1, normalized size = -0.01

$$\int \left(a + \frac{b}{\cos(e + f x)} \right) (c + d x)^2 dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] `int((a + b/cos(e + f*x))*(c + d*x)^2,x)`
[Out] `int((a + b/cos(e + f*x))*(c + d*x)^2, x)`

$$\int (c + dx)(a + b \sec(e + fx)) dx$$

Optimal. Leaf size=93

$$\frac{a(c+dx)^2}{2d} - \frac{2ib(c+dx)\text{ArcTan}(e^{i(e+fx)})}{f} + \frac{ibd\text{PolyLog}(2, -ie^{i(e+fx)})}{f^2} - \frac{ibd\text{PolyLog}(2, ie^{i(e+fx)})}{f^2}$$

[Out] $\frac{1}{2}a*(d*x+c)^2/d - 2*I*b*(d*x+c)*\arctan(\exp(I*(f*x+e)))/f + I*b*d*\text{polylog}(2, -I*\exp(I*(f*x+e)))/f^2 - I*b*d*\text{polylog}(2, I*\exp(I*(f*x+e)))/f^2$

Rubi [A]

time = 0.05, antiderivative size = 93, normalized size of antiderivative = 1.00, number of steps used = 7, number of rules used = 4, integrand size = 16, $\frac{\text{number of rules}}{\text{integrand size}} = 0.250$, Rules used = {4275, 4266, 2317, 2438}

$$\frac{a(c+dx)^2}{2d} - \frac{2ib(c+dx)\text{ArcTan}(e^{i(e+fx)})}{f} + \frac{ibd\text{Li}_2(-ie^{i(e+fx)})}{f^2} - \frac{ibd\text{Li}_2(ie^{i(e+fx)})}{f^2}$$

Antiderivative was successfully verified.

[In] $\text{Int}[(c + d*x)*(a + b*\text{Sec}[e + f*x]), x]$

[Out] $(a*(c + d*x)^2/(2*d) - ((2*I)*b*(c + d*x)*\text{ArcTan}[E^{(I*(e + f*x))}])/f + (I*b*d*\text{PolyLog}[2, (-I)*E^{(I*(e + f*x))}])/f^2 - (I*b*d*\text{PolyLog}[2, I*E^{(I*(e + f*x))}])/f^2)$

Rule 2317

```
Int[Log[(a_) + (b_)*((F_)^((e_.)*(c_.) + (d_)*(x_))))^(n_.)], x_Symbol]
: > Dist[1/(d*e*n*Log[F]), Subst[Int[Log[a + b*x]/x, x], x, (F^(e*(c + d*x)))^n], x] /; FreeQ[{F, a, b, c, d, e, n}, x] && GtQ[a, 0]
```

Rule 2438

```
Int[Log[((d_) + (e_)*(x_)^(n_.))]/(x_), x_Symbol] : > Simp[-PolyLog[2, (-c)*e*x^n]/n, x] /; FreeQ[{c, d, e, n}, x] && EqQ[c*d, 1]
```

Rule 4266

```
Int[csc[(e_.) + Pi*(k_.) + (f_)*(x_)]*((c_.) + (d_)*(x_))^(m_.), x_Symbol]
: > Simp[-2*(c + d*x)^m*(ArcTanh[E^(I*k*Pi)*E^(I*(e + f*x))]/f), x] + (-Dist[d*(m/f), Int[(c + d*x)^(m - 1)*Log[1 - E^(I*k*Pi)*E^(I*(e + f*x))], x], x] + Dist[d*(m/f), Int[(c + d*x)^(m - 1)*Log[1 + E^(I*k*Pi)*E^(I*(e + f*x))], x], x]) /; FreeQ[{c, d, e, f}, x] && IntegerQ[2*k] && IGtQ[m, 0]
```

Rule 4275

```
Int[(csc[(e_.) + (f_ .)*(x_)]*(b_.) + (a_.))^(n_.)*((c_.) + (d_.)*(x_))^(m_.),
x_Symbol] :> Int[ExpandIntegrand[(c + d*x)^m, (a + b*Csc[e + f*x])^n, x],
x] /; FreeQ[{a, b, c, d, e, f, m}, x] && IGtQ[m, 0] && IGtQ[n, 0]
```

Rubi steps

$$\begin{aligned}
\int (c + dx)(a + b \sec(e + fx)) dx &= \int (a(c + dx) + b(c + dx) \sec(e + fx)) dx \\
&= \frac{a(c + dx)^2}{2d} + b \int (c + dx) \sec(e + fx) dx \\
&= \frac{a(c + dx)^2}{2d} - \frac{2ib(c + dx) \tan^{-1}(e^{i(e+fx)})}{f} - \frac{(bd) \int \log(1 - ie^{i(e+fx)}) dx}{f} \\
&= \frac{a(c + dx)^2}{2d} - \frac{2ib(c + dx) \tan^{-1}(e^{i(e+fx)})}{f} + \frac{(ibd) \text{Subst}\left(\int \frac{\log(1-ix)}{x} dx, x, \right)}{f^2} \\
&= \frac{a(c + dx)^2}{2d} - \frac{2ib(c + dx) \tan^{-1}(e^{i(e+fx)})}{f} + \frac{ibd \text{Li}_2(-ie^{i(e+fx)})}{f^2} - \frac{ibd \text{Li}_2}{f^2}
\end{aligned}$$

Mathematica [A]

time = 0.02, size = 104, normalized size = 1.12

$$acx + \frac{1}{2}adx^2 - \frac{2ibdx \text{ArcTan}(e^{ie+ifx})}{f} + \frac{bc \tanh^{-1}(\sin(e + fx))}{f} + \frac{ibd \text{PolyLog}(2, -ie^{i(e+fx)})}{f^2} - \frac{ibd \text{PolyLog}(2, ie^{i(e+fx)})}{f^2}$$

Antiderivative was successfully verified.

[In] `Integrate[(c + d*x)*(a + b*Sec[e + f*x]), x]`

[Out] $a*c*x + (a*d*x^2)/2 - ((2*I)*b*d*x*\text{ArcTan}[E^{(I*e + I*f*x)})]/f + (b*c*\text{ArcTan}[h[\text{Sin}[e + f*x]]])/f + (I*b*d*\text{PolyLog}[2, (-I)*E^{(I*(e + f*x))}])/f^2 - (I*b*d*\text{PolyLog}[2, I*E^{(I*(e + f*x))}])/f^2$

Maple [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 165 vs. $2(80) = 160$.

time = 0.36, size = 166, normalized size = 1.78

method	result
derivativedivides	$ac(fx+e) - \frac{ade(fx+e)}{f} + \frac{ad(fx+e)^2}{2f} + bc \ln(\sec(fx+e) + \tan(fx+e)) - \frac{bde \ln(\sec(fx+e) + \tan(fx+e))}{f} + \frac{bd(-(fx+e) \ln(1 + ie^{i(fx+e)}))}{f}$
default	$ac(fx+e) - \frac{ade(fx+e)}{f} + \frac{ad(fx+e)^2}{2f} + bc \ln(\sec(fx+e) + \tan(fx+e)) - \frac{bde \ln(\sec(fx+e) + \tan(fx+e))}{f} + \frac{bd(-(fx+e) \ln(1 + ie^{i(fx+e)}))}{f}$

risch	$\frac{adx^2}{2} + acx - \frac{2ibc \arctan(e^{i(fx+e)})}{f} - \frac{bd \ln(1+ie^{i(fx+e)})x}{f} - \frac{bd \ln(1+ie^{i(fx+e)})e}{f^2} + \frac{bd \ln(1-ie^{i(fx+e)})x}{f} +$
-------	---

Verification of antiderivative is not currently implemented for this CAS.

```
[In] int((d*x+c)*(a+b*sec(f*x+e)),x,method=_RETURNVERBOSE)
[Out] 1/f*(a*c*(f*x+e)-a/f*d*e*(f*x+e)+1/2*a/f*d*(f*x+e)^2+b*c*ln(sec(f*x+e)+tan(f*x+e))-1/f*b*d*e*ln(sec(f*x+e)+tan(f*x+e))+1/f*b*d*(-(f*x+e))*ln(1+I*exp(I*(f*x+e)))+(f*x+e)*ln(1-I*exp(I*(f*x+e)))+I*dilog(1+I*exp(I*(f*x+e)))-I*dilog(1-I*exp(I*(f*x+e))))
```

Maxima [F]

time = 0.00, size = 0, normalized size = 0.00

Failed to integrate

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)*(a+b*sec(f*x+e)),x, algorithm="maxima")
[Out] 1/2*(a*d*f*x^2 + 2*a*c*f*x + 4*b*d*f*integrate((x*cos(2*f*x + 2*e)*cos(f*x + e) + x*sin(2*f*x + 2*e)*sin(f*x + e) + x*cos(f*x + e))/((cos(2*f*x + 2*e)^2 + sin(2*f*x + 2*e)^2 + 2*cos(2*f*x + 2*e) + 1), x) + b*c*log(cos(f*x + e)^2 + sin(f*x + e)^2 + 2*sin(f*x + e) + 1) - b*c*log(cos(f*x + e)^2 + sin(f*x + e)^2 - 2*sin(f*x + e) + 1))/f
```

Fricas [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 375 vs. $2(76) = 152$.

time = 3.66, size = 375, normalized size = 4.03

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)*(a+b*sec(f*x+e)),x, algorithm="fricas")
[Out] 1/2*(a*d*f^2*x^2 + 2*a*c*f^2*x - I*b*d*dilog(I*cos(f*x + e) + sin(f*x + e)) - I*b*d*dilog(I*cos(f*x + e) - sin(f*x + e)) + I*b*d*dilog(-I*cos(f*x + e) + sin(f*x + e)) + I*b*d*dilog(-I*cos(f*x + e) - sin(f*x + e)) + (b*c*f - b*d*e)*log(cos(f*x + e) - I*sin(f*x + e) + I) - (b*c*f - b*d*e)*log(cos(f*x + e) + I) + (b*d*f*x + b*d*e)*log(I*cos(f*x + e) + sin(f*x + e) + 1) - (b*d*f*x + b*d*e)*log(I*cos(f*x + e) - sin(f*x + e) + 1) + (b*d*f*x + b*d*e)*log(-I*cos(f*x + e) - sin(f*x + e) + 1) + (b*c*f - b*d*e)*log(-cos(f*x + e) + I*sin(f*x + e) + I) - (b*c*f - b*d*e)*log(-cos(f*x + e) - I*sin(f*x + e) + I))/f^2
```

Sympy [F]

time = 0.00, size = 0, normalized size = 0.00

$$\int (a + b \sec(e + fx)) (c + dx) \, dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate((d*x+c)*(a+b*sec(f*x+e)),x)`

[Out] `Integral((a + b*sec(e + f*x))*(c + d*x), x)`

Giac [F]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate((d*x+c)*(a+b*sec(f*x+e)),x, algorithm="giac")`

[Out] `integrate((d*x + c)*(b*sec(f*x + e) + a), x)`

Mupad [F]

time = 0.00, size = -1, normalized size = -0.01

$$\int \left(a + \frac{b}{\cos(e + fx)} \right) (c + dx) \, dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] `int((a + b/cos(e + f*x))*(c + d*x),x)`

[Out] `int((a + b/cos(e + f*x))*(c + d*x), x)`

3.27 $\int \frac{a+b \sec(e+fx)}{c+dx} dx$

Optimal. Leaf size=21

$$\text{Int}\left(\frac{a+b \sec(e+fx)}{c+dx}, x\right)$$

[Out] Unintegrable((a+b*sec(f*x+e))/(d*x+c),x)

Rubi [A]

time = 0.02, antiderivative size = 0, normalized size of antiderivative = 0.00, number of steps used = 0, number of rules used = 0, integrand size = 0, $\frac{\text{number of rules}}{\text{integrand size}}$ = 0.000, Rules used = {}

$$\int \frac{a+b \sec(e+fx)}{c+dx} dx$$

Verification is not applicable to the result.

[In] Int[(a + b*Sec[e + f*x])/(c + d*x),x]

[Out] Defer[Int][(a + b*Sec[e + f*x])/(c + d*x), x]

Rubi steps

$$\int \frac{a+b \sec(e+fx)}{c+dx} dx = \int \frac{a+b \sec(e+fx)}{c+dx} dx$$

Mathematica [A]

time = 0.94, size = 0, normalized size = 0.00

$$\int \frac{a+b \sec(e+fx)}{c+dx} dx$$

Verification is not applicable to the result.

[In] Integrate[(a + b*Sec[e + f*x])/(c + d*x),x]

[Out] Integrate[(a + b*Sec[e + f*x])/(c + d*x), x]

Maple [A]

time = 0.28, size = 0, normalized size = 0.00

$$\int \frac{a+b \sec(fx+e)}{dx+c} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\int \frac{(a+b\sec(fx+e))}{(dx+c)} dx$

[Out] $\int \frac{(a+b\sec(fx+e))}{(dx+c)} dx$

Maxima [A]

time = 0.00, size = 0, normalized size = 0.00

Failed to integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((a+b\sec(fx+e))/(dx+c), x, \text{algorithm}=\text{"maxima"})$

[Out] $(2b\int \frac{\cos(2fx + 2e)\cos(fx + e) + \sin(2fx + 2e)\sin(fx + e) + \cos(fx + e)}{(dx + c)\cos(2fx + 2e)^2 + (dx + c)\sin(2fx + 2e)^2 + dx + 2(dx + c)\cos(2fx + 2e) + c}, x) + a\log(dx + c)/d$

Fricas [A]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((a+b\sec(fx+e))/(dx+c), x, \text{algorithm}=\text{"fricas"})$

[Out] $\text{integral}((b\sec(fx + e) + a)/(dx + c), x)$

Sympy [A]

time = 0.00, size = 0, normalized size = 0.00

$$\int \frac{a + b \sec(e + fx)}{c + dx} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((a+b\sec(fx+e))/(dx+c), x)$

[Out] $\text{Integral}((a + b*\sec(e + fx))/(c + d*x), x)$

Giac [A]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((a+b\sec(fx+e))/(dx+c), x, \text{algorithm}=\text{"giac"})$

[Out] $\text{integrate}((b\sec(fx + e) + a)/(dx + c), x)$

Mupad [A]

time = 0.00, size = -1, normalized size = -0.05

$$\int \frac{a + \frac{b}{\cos(e+fx)}}{c+dx} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] `int((a + b/cos(e + f*x))/(c + d*x),x)`[Out] `int((a + b/cos(e + f*x))/(c + d*x), x)`

3.28 $\int \frac{a+b \sec(e+fx)}{(c+dx)^2} dx$

Optimal. Leaf size=21

$$\text{Int}\left(\frac{a+b \sec(e+fx)}{(c+dx)^2}, x\right)$$

[Out] Unintegrable((a+b*sec(f*x+e))/(d*x+c)^2,x)

Rubi [A]

time = 0.02, antiderivative size = 0, normalized size of antiderivative = 0.00, number of steps used = 0, number of rules used = 0, integrand size = 0, $\frac{\text{number of rules}}{\text{integrand size}}$ = 0.000, Rules used = {}

$$\int \frac{a+b \sec(e+fx)}{(c+dx)^2} dx$$

Verification is not applicable to the result.

[In] Int[(a + b*Sec[e + f*x])/((c + d*x)^2,x)]

[Out] Defer[Int][(a + b*Sec[e + f*x])/((c + d*x)^2, x)]

Rubi steps

$$\int \frac{a+b \sec(e+fx)}{(c+dx)^2} dx = \int \frac{a+b \sec(e+fx)}{(c+dx)^2} dx$$

Mathematica [A]

time = 1.36, size = 0, normalized size = 0.00

$$\int \frac{a+b \sec(e+fx)}{(c+dx)^2} dx$$

Verification is not applicable to the result.

[In] Integrate[(a + b*Sec[e + f*x])/((c + d*x)^2,x)]

[Out] Integrate[(a + b*Sec[e + f*x])/((c + d*x)^2, x)]

Maple [A]

time = 0.27, size = 0, normalized size = 0.00

$$\int \frac{a+b \sec(fx+e)}{(dx+c)^2} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\int \frac{(a+b\sec(fx+e))}{(dx+c)^2} dx$
[Out] $\int \frac{(a+b\sec(fx+e))}{(dx+c)^2} dx$

Maxima [A]

time = 0.00, size = 0, normalized size = 0.00

Failed to integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}\left(\frac{(a+b\sec(fx+e))}{(dx+c)^2}, x, \text{algorithm}=\text{"maxima"}\right)$
[Out]
$$\begin{aligned} & 2*(b*d^2*x + b*c*d)*\int (\cos(2*f*x + 2*e)*\cos(f*x + e) + \sin(2*f*x + 2*e)*\sin(f*x + e) + \cos(f*x + e))/((d^2*x^2 + 2*c*d*x + (d^2*x^2 + 2*c*d*x + c^2)*\cos(2*f*x + 2*e))^2 + (d^2*x^2 + 2*c*d*x + c^2)*\sin(2*f*x + 2*e))^2 + c^2 + 2*(d^2*x^2 + 2*c*d*x + c^2)*\cos(2*f*x + 2*e)), x) - a)/(d^2*x + c*d) \end{aligned}$$

Fricas [A]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}\left(\frac{(a+b\sec(fx+e))}{(dx+c)^2}, x, \text{algorithm}=\text{"fricas"}\right)$
[Out] $\text{integral}\left(\frac{b*\sec(f*x + e) + a}{(d^2*x^2 + 2*c*d*x + c^2)}, x\right)$

Sympy [A]

time = 0.00, size = 0, normalized size = 0.00

$$\int \frac{a + b \sec(e + fx)}{(c + dx)^2} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}\left(\frac{(a+b\sec(fx+e))}{(dx+c)^2}, x\right)$
[Out] $\text{Integral}\left(\frac{(a + b*\sec(e + fx))}{(c + d*x)^2}, x\right)$

Giac [A]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}\left(\frac{(a+b\sec(fx+e))}{(dx+c)^2}, x, \text{algorithm}=\text{"giac"}\right)$
[Out] $\text{integrate}\left(\frac{b*\sec(f*x + e) + a}{(d*x + c)^2}, x\right)$

Mupad [A]

time = 0.00, size = -1, normalized size = -0.05

$$\int \frac{a + \frac{b}{\cos(e+fx)}}{(c+dx)^2} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] `int((a + b/cos(e + f*x))/(c + d*x)^2,x)`[Out] `int((a + b/cos(e + f*x))/(c + d*x)^2, x)`

$$3.29 \quad \int (c + dx)^3 (a + b \sec(e + fx))^2 dx$$

Optimal. Leaf size=364

$$-\frac{ib^2(c + dx)^3}{f} + \frac{a^2(c + dx)^4}{4d} - \frac{4iab(c + dx)^3 \operatorname{ArcTan}(e^{i(e+fx)})}{f} + \frac{3b^2d(c + dx)^2 \log(1 + e^{2i(e+fx)})}{f^2} + \frac{6iabd(c + dx)^3 \operatorname{PolyLog}(2, -I \operatorname{exp}(I(f*x + e)))}{f^3}$$

[Out] $-\text{I}^*\text{b}^2\text{(d*x+c)}^3/\text{f}+1/4\text{a}^2\text{(d*x+c)}^4/\text{d}-4\text{I*a*b*(d*x+c)}^3\operatorname{arctan}(\operatorname{exp}(\text{I}^*(\text{f*x}+\text{e}))/\text{f}+3\text{b}^2\text{d*(d*x+c)}^2\ln(1+\operatorname{exp}(2\text{I}^*(\text{f*x}+\text{e})))/\text{f}^2+6\text{I*a*b*d*(d*x+c)}^2\operatorname{polylog}(2,\text{I}^*\operatorname{exp}(\text{I}^*(\text{f*x}+\text{e}))/\text{f}^2-3\text{I*b}^2\text{d*(d*x+c)}\operatorname{polylog}(2,-\operatorname{exp}(2\text{I}^*(\text{f*x}+\text{e}))/\text{f}^3-12\text{a*b*d}^2\text{(d*x+c)}\operatorname{polylog}(3,-\text{I}^*\operatorname{exp}(\text{I}^*(\text{f*x}+\text{e}))/\text{f}^3+12\text{a*b*d}^2\text{(d*x+c)}\operatorname{polylog}(3,\text{I}^*\operatorname{exp}(\text{I}^*(\text{f*x}+\text{e}))/\text{f}^3+3/2\text{b}^2\text{d}^3\operatorname{polylog}(3,-\operatorname{exp}(2\text{I}^*(\text{f*x}+\text{e}))/\text{f}^4-12\text{I*a*b*d}^3\operatorname{polylog}(4,\text{I}^*\operatorname{exp}(\text{I}^*(\text{f*x}+\text{e}))/\text{f}^4+12\text{I*a*b*d}^3\operatorname{polylog}(4,\text{I}^*\operatorname{exp}(\text{I}^*(\text{f*x}+\text{e}))/\text{f}^4+2\text{(d*x+c)}^3\tan(\text{f*x}+\text{e})/\text{f}$

Rubi [A]

time = 0.32, antiderivative size = 364, normalized size of antiderivative = 1.00, number of steps used = 17, number of rules used = 9, integrand size = 20, $\frac{\text{number of rules}}{\text{integrand size}} = 0.450$, Rules used = {4275, 4266, 2611, 6744, 2320, 6724, 4269, 3800, 2221}

$$\frac{a^2(c + dx)^4}{4d} - \frac{4iab(c + dx)^3 \operatorname{ArcTan}(e^{i(e+fx)})}{f} - \frac{12abd^2(c + dx) \operatorname{Li}_3(-e^{i(e+fx)})}{f^3} + \frac{12abd^2(c + dx) \operatorname{Li}_3(e^{i(e+fx)})}{f^3} + \frac{6iabd(c + dx)^2 \operatorname{Li}_2(-e^{i(e+fx)})}{f^2} - \frac{6iabd(c + dx)^2 \operatorname{Li}_2(e^{i(e+fx)})}{f^2} - \frac{12iabd^3 \operatorname{Li}_4(-e^{i(e+fx)})}{f^4} + \frac{12iabd^3 \operatorname{Li}_4(e^{i(e+fx)})}{f^4} - \frac{3iPd^2(c + dx) \operatorname{Li}_2(-e^{2i(e+fx)})}{f^3} + \frac{3iPd^2(c + dx)^2 \log(1 + e^{2i(e+fx)})}{f^2} + \frac{P(c + dx)^3 \tan(e + fx)}{f} - \frac{ib^2(c + dx)^3}{f} + \frac{3b^2d^2 \operatorname{Li}_3(-e^{2i(e+fx)})}{2f^4}$$

Antiderivative was successfully verified.

$$[\text{In}] \quad \text{Int}[(c + d*x)^3 * (a + b*\operatorname{Sec}[e + f*x])^2, x]$$

[Out] $((-I)*b^2*(c + d*x)^3)/f + (a^2*(c + d*x)^4)/(4*d) - ((4*I)*a*b*(c + d*x)^3 * \operatorname{ArcTan}[E^(\text{I}^*(\text{e} + \text{f*x}))])/f + (3*b^2*d*(c + d*x)^2 * \operatorname{Log}[1 + E^((2*I)*(e + f*x))])/f^2 + ((6*I)*a*b*d*(c + d*x)^2 * \operatorname{PolyLog}[2, -\text{I}^*\operatorname{E}^(\text{I}^*(\text{e} + \text{f*x}))])/f^2 - ((6*I)*a*b*d*(c + d*x)^2 * \operatorname{PolyLog}[2, \text{I}^*\operatorname{E}^(\text{I}^*(\text{e} + \text{f*x}))])/f^2 - ((3*I)*b^2*d^2*(c + d*x)*\operatorname{PolyLog}[2, -E^((2*I)*(e + f*x))])/f^3 - (12*a*b*d^2*(c + d*x)*\operatorname{PolyLog}[3, -\text{I}^*\operatorname{E}^(\text{I}^*(\text{e} + \text{f*x}))])/f^3 + (12*a*b*d^2*(c + d*x)*\operatorname{PolyLog}[3, \text{I}^*\operatorname{E}^(\text{I}^*(\text{e} + \text{f*x}))])/f^3 + (3*b^2*d^3 * \operatorname{PolyLog}[3, -E^((2*I)*(e + f*x))])/(2*f^4) - ((12*I)*a*b*d^3 * \operatorname{PolyLog}[4, -\text{I}^*\operatorname{E}^(\text{I}^*(\text{e} + \text{f*x}))])/f^4 + ((12*I)*a*b*d^3 * \operatorname{PolyLog}[4, \text{I}^*\operatorname{E}^(\text{I}^*(\text{e} + \text{f*x}))])/f^4 + (b^2*(c + d*x)^3 * \operatorname{Tan}[e + f*x])/f$

Rule 2221

```
Int[((F_)^((g_.)*(e_.) + (f_.)*(x_.)))^(n_.)*((c_.) + (d_.)*(x_.)^(m_.))/((a_) + (b_.)*(F_)^((g_.)*(e_.) + (f_.)*(x_.))))^(n_), x_Symbol] := Simp[((c + d*x)^m/(b*f*g*n*Log[F]))*Log[1 + b*((F^(g*(e + fx)))^n/a)], x] - Dist[d*(m/(b*f*g*n*Log[F])), Int[(c + d*x)^(m - 1)*Log[1 + b*((F^(g*(e + fx)))^n/a)], x], x]; FreeQ[{F, a, b, c, d, e, f, g, n}, x] && IGtQ[m, 0]
```

Rule 2320

```
Int[u_, x_Symbol] :> With[{v = FunctionOfExponential[u, x]}, Dist[v/D[v, x]
, Subst[Int[FunctionOfExponentialFunction[u, x]/x, x], x, v], x]] /; FunctionOfExponentialQ[u, x] && !MatchQ[u, (w_)*((a_.)*(v_)^(n_))^(m_)] /; FreeQ[{a, m, n}, x] && IntegerQ[m*n] && !MatchQ[u, E^((c_)*(a_.) + (b_)*x))*(F_)[v_] /; FreeQ[{a, b, c}, x] && InverseFunctionQ[F[x]]]
```

Rule 2611

```
Int[Log[1 + (e_)*(F_)^((c_)*(a_.) + (b_)*(x_)))^(n_.)]*((f_.) + (g_.)*(x_)^(m_), x_Symbol] :> Simp[(-(f + g*x)^m)*(PolyLog[2, (-e)*(F^(c*(a + b*x)))^n]/(b*c*n*Log[F])), x] + Dist[g*(m/(b*c*n*Log[F])), Int[(f + g*x)^(m - 1)*PolyLog[2, (-e)*(F^(c*(a + b*x)))^n], x], x] /; FreeQ[{F, a, b, c, e, f, g, n}, x] && GtQ[m, 0]
```

Rule 3800

```
Int[((c_.) + (d_)*(x_))^(m_)*tan[(e_.) + (f_.)*(x_)], x_Symbol] :> Simp[I*((c + d*x)^(m + 1)/(d*(m + 1))), x] - Dist[2*I, Int[(c + d*x)^m*(E^(2*I*(e + f*x))/(1 + E^(2*I*(e + f*x)))), x], x] /; FreeQ[{c, d, e, f}, x] && IGtQ[m, 0]
```

Rule 4266

```
Int[csc[(e_.) + Pi*(k_.) + (f_.)*(x_)]*((c_.) + (d_)*(x_))^(m_.), x_Symbol] :> Simp[-2*(c + d*x)^m*(ArcTanh[E^(I*k*Pi)*E^(I*(e + f*x))/f], x] + (-Dist[d*(m/f), Int[(c + d*x)^(m - 1)*Log[1 - E^(I*k*Pi)*E^(I*(e + f*x))], x], x] + Dist[d*(m/f), Int[(c + d*x)^(m - 1)*Log[1 + E^(I*k*Pi)*E^(I*(e + f*x))], x], x]) /; FreeQ[{c, d, e, f}, x] && IntegerQ[2*k] && IGtQ[m, 0]
```

Rule 4269

```
Int[csc[(e_.) + (f_.)*(x_)]^2*((c_.) + (d_)*(x_))^(m_.), x_Symbol] :> Simp[(-(c + d*x)^m)*(Cot[e + f*x]/f), x] + Dist[d*(m/f), Int[(c + d*x)^(m - 1)*Cot[e + f*x], x], x] /; FreeQ[{c, d, e, f}, x] && GtQ[m, 0]
```

Rule 4275

```
Int[(csc[(e_.) + (f_.)*(x_)]*(b_.) + (a_.))^(n_.)*((c_.) + (d_)*(x_))^(m_.), x_Symbol] :> Int[ExpandIntegrand[(c + d*x)^m, (a + b*Csc[e + f*x])^n, x], x] /; FreeQ[{a, b, c, d, e, f, m}, x] && IGtQ[m, 0] && IGtQ[n, 0]
```

Rule 6724

```
Int[PolyLog[n_, (c_)*(a_.) + (b_)*(x_))^(p_.)]/((d_.) + (e_)*(x_)), x_Symbol] :> Simp[PolyLog[n + 1, c*(a + b*x)^p]/(e*p), x] /; FreeQ[{a, b, c, d, e, n, p}, x] && EqQ[b*d, a*e]
```

Rule 6744

```
Int[((e_.) + (f_.)*(x_))^(m_)*PolyLog[n_, (d_.)*((F_)^((c_.)*((a_.) + (b_.)*(x_))))^(p_.)], x_Symbol] :> Simp[(e + f*x)^m*(PolyLog[n + 1, d*(F^(c*(a + b*x)))^p]/(b*c*p*Log[F])), x] - Dist[f*(m/(b*c*p*Log[F])), Int[(e + f*x)^(m - 1)*PolyLog[n + 1, d*(F^(c*(a + b*x)))^p], x], x] /; FreeQ[{F, a, b, c, d, e, f, n, p}, x] && GtQ[m, 0]
```

Rubi steps

$$\begin{aligned}
\int (c + dx)^3 (a + b \sec(e + fx))^2 dx &= \int (a^2(c + dx)^3 + 2ab(c + dx)^3 \sec(e + fx) + b^2(c + dx)^3 \sec^2(e + fx)) \\
&= \frac{a^2(c + dx)^4}{4d} + (2ab) \int (c + dx)^3 \sec(e + fx) dx + b^2 \int (c + dx)^3 \sec^2(e + fx) dx \\
&= \frac{a^2(c + dx)^4}{4d} - \frac{4iab(c + dx)^3 \tan^{-1}(e^{i(e+fx)})}{f} + \frac{b^2(c + dx)^3 \tan(e + fx)}{f} \\
&= -\frac{ib^2(c + dx)^3}{f} + \frac{a^2(c + dx)^4}{4d} - \frac{4iab(c + dx)^3 \tan^{-1}(e^{i(e+fx)})}{f} + \frac{6iab^2(c + dx)^3}{f} \\
&= -\frac{ib^2(c + dx)^3}{f} + \frac{a^2(c + dx)^4}{4d} - \frac{4iab(c + dx)^3 \tan^{-1}(e^{i(e+fx)})}{f} + \frac{3b^2d(c + dx)^3}{f} \\
&= -\frac{ib^2(c + dx)^3}{f} + \frac{a^2(c + dx)^4}{4d} - \frac{4iab(c + dx)^3 \tan^{-1}(e^{i(e+fx)})}{f} + \frac{3b^2d(c + dx)^3}{f} \\
&= -\frac{ib^2(c + dx)^3}{f} + \frac{a^2(c + dx)^4}{4d} - \frac{4iab(c + dx)^3 \tan^{-1}(e^{i(e+fx)})}{f} + \frac{3b^2d(c + dx)^3}{f} \\
&= -\frac{ib^2(c + dx)^3}{f} + \frac{a^2(c + dx)^4}{4d} - \frac{4iab(c + dx)^3 \tan^{-1}(e^{i(e+fx)})}{f} + \frac{3b^2d(c + dx)^3}{f}
\end{aligned}$$

Mathematica [B] Both result and optimal contain complex but leaf count is larger than twice the leaf count of optimal. 1700 vs. 2(364) = 728.

time = 10.13, size = 1700, normalized size = 4.67

Antiderivative was successfully verified.

```
[In] Integrate[(c + d*x)^3*(a + b*Sec[e + f*x])^2, x]
[Out] (a^2*x*(4*c^3 + 6*c^2*d*x + 4*c*d^2*x^2 + d^3*x^3)*Cos[e + f*x]^2*(a + b*Se
c[e + f*x])^2)/(4*(b + a*Cos[e + f*x])^2) + (b*Cos[e + f*x]^2*((-12*I)*b*c^
2*d*E^((2*I)*e)*f^3*x - (12*I)*b*c*d^2*E^((2*I)*e)*f^3*x^2 - (4*I)*b*d^3*E^
2*x^3))
```

$$\begin{aligned}
& ((2*I)*e)*f^3*x^3 - (8*I)*a*c^3*f^3*\text{ArcTan}[E^{\text{I}}*(e + f*x)] - (8*I)*a*c^3*E \\
& ^{\text{I}}((2*I)*e)*f^3*\text{ArcTan}[E^{\text{I}}*(e + f*x)] + 12*a*c^2*d*f^3*x*\text{Log}[1 - I*E^{\text{I}}*(e + f*x)] + 12*a*c^2*d*E^{\text{I}}((2*I)*e)*f^3*x*\text{Log}[1 - I*E^{\text{I}}*(e + f*x)] + 12*a*c^2*d^2*f^3*x^2*\text{Log}[1 - I*E^{\text{I}}*(e + f*x)] + 12*a*c*d^2*E^{\text{I}}((2*I)*e)*f^3*x^2*L \\
& \text{og}[1 - I*E^{\text{I}}*(e + f*x)] + 4*a*d^3*f^3*x^3*\text{Log}[1 - I*E^{\text{I}}*(e + f*x)] + 4*a*d^3*E^{\text{I}}((2*I)*e)*f^3*x^3*\text{Log}[1 - I*E^{\text{I}}*(e + f*x)] - 12*a*c^2*d*f^3*x*\text{Log}[1 + I*E^{\text{I}}*(e + f*x)] - 12*a*c^2*d*E^{\text{I}}((2*I)*e)*f^3*x*\text{Log}[1 + I*E^{\text{I}}*(e + f*x)] - 12*a*c*d^2*f^3*x^2*\text{Log}[1 + I*E^{\text{I}}*(e + f*x)] - 12*a*c*d^2*E^{\text{I}}((2*I)*e)*f^3*x^2*\text{Log}[1 + I*E^{\text{I}}*(e + f*x)] - 4*a*d^3*f^3*x^3*\text{Log}[1 + I*E^{\text{I}}*(e + f*x)] - 4*a*d^3*E^{\text{I}}((2*I)*e)*f^3*x^3*\text{Log}[1 + I*E^{\text{I}}*(e + f*x)] + 6*b*c^2*d*f^2*\text{Log}[1 + E^{\text{I}}((2*I)*(e + f*x))] + 6*b*c^2*d*E^{\text{I}}((2*I)*e)*f^2*\text{Log}[1 + E^{\text{I}}((2*I)*(e + f*x))] + 12*b*c*d^2*f^2*x*\text{Log}[1 + E^{\text{I}}((2*I)*(e + f*x))] + 12*b*c*d^2*E^{\text{I}}((2*I)*e)*f^2*x*\text{Log}[1 + E^{\text{I}}((2*I)*(e + f*x))] + 6*b*d^3*f^2*x^2*\text{Log}[1 + E^{\text{I}}((2*I)*(e + f*x))] + 6*b*d^3*E^{\text{I}}((2*I)*e)*f^2*x^2*\text{Log}[1 + E^{\text{I}}((2*I)*(e + f*x))] + (12*I)*a*d*(1 + E^{\text{I}}((2*I)*e))*f^2*(c + d*x)^2*\text{PolyLog}[2, (-I)*E^{\text{I}}*(e + f*x)] - (12*I)*a*d*(1 + E^{\text{I}}((2*I)*e))*f^2*(c + d*x)^2*\text{PolyLog}[2, I*E^{\text{I}}*(e + f*x)] - (6*I)*b*c*d^2*f*\text{PolyLog}[2, -E^{\text{I}}((2*I)*(e + f*x))] - (6*I)*b*c*d^2*E^{\text{I}}((2*I)*e)*f*\text{PolyLog}[2, -E^{\text{I}}((2*I)*(e + f*x))] - (6*I)*b*d^3*f*x*\text{PolyLog}[2, -E^{\text{I}}((2*I)*(e + f*x))] - (6*I)*b*d^3*E^{\text{I}}((2*I)*e)*f*x*\text{PolyLog}[2, -E^{\text{I}}((2*I)*(e + f*x))] - 24*a*c*d^2*f*\text{PolyLog}[3, (-I)*E^{\text{I}}*(e + f*x)] - 24*a*c*d^2*E^{\text{I}}((2*I)*e)*f*\text{PolyLog}[3, (-I)*E^{\text{I}}*(e + f*x)] - 24*a*d^3*f*x*\text{PolyLog}[3, (-I)*E^{\text{I}}*(e + f*x)] - 24*a*d^3*E^{\text{I}}((2*I)*e)*f*x*\text{PolyLog}[3, (-I)*E^{\text{I}}*(e + f*x)] + 24*a*c*d^2*f*\text{PolyLog}[3, I*E^{\text{I}}*(e + f*x)] + 24*a*c*d^2*E^{\text{I}}((2*I)*e)*f*\text{PolyLog}[3, I*E^{\text{I}}*(e + f*x)] + 24*a*d^3*f*x*\text{PolyLog}[3, I*E^{\text{I}}*(e + f*x)] + 24*a*d^3*E^{\text{I}}((2*I)*e)*f*x*\text{PolyLog}[3, I*E^{\text{I}}*(e + f*x)] + 3*b*d^3*PolyLog[3, -E^{\text{I}}((2*I)*(e + f*x))] + 3*b*d^3*E^{\text{I}}((2*I)*e)*PolyLog[3, -E^{\text{I}}((2*I)*(e + f*x))] - (24*I)*a*d^3*PolyLog[4, (-I)*E^{\text{I}}*(e + f*x)] - (24*I)*a*d^3*E^{\text{I}}((2*I)*e)*PolyLog[4, (-I)*E^{\text{I}}*(e + f*x)] + (24*I)*a*d^3*PolyLog[4, I*E^{\text{I}}*(e + f*x)] + (24*I)*a*d^3*E^{\text{I}}((2*I)*e)*PolyLog[4, I*E^{\text{I}}*(e + f*x)])*(a + b*Sec[e + f*x])^2)/(2*(1 + E^{\text{I}}((2*I)*e))*f^4*(b + a*Cos[e + f*x])^2) + (Cos[e + f*x]^2*(a + b*Sec[e + f*x])^2*(b^2*c^3*Sin[(f*x)/2] + 3*b^2*c^2*d*x*Sin[(f*x)/2] + 3*b^2*c*d^2*x^2*Sin[(f*x)/2] + b^2*d^3*x^3*Sin[(f*x)/2]))/(f*(b + a*Cos[e + f*x])^2*(Cos[e/2] - Sin[e/2])*(Cos[e/2 + (f*x)/2] - Sin[e/2 + (f*x)/2])) + (Cos[e + f*x]^2*(a + b*Sec[e + f*x])^2*(b^2*c^3*Sin[(f*x)/2] + 3*b^2*c*d^2*x^2*Sin[(f*x)/2] + b^2*d^3*x^3*Sin[(f*x)/2]))/(f*(b + a*Cos[e + f*x])^2*(Cos[e/2] + Sin[e/2])*(Cos[e/2 + (f*x)/2] + Sin[e/2 + (f*x)/2]))
\end{aligned}$$

Maple [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 1488 vs. $2(327) = 654$.

time = 1.17, size = 1489, normalized size = 4.09

method	result	size
risch	Expression too large to display	1489

Verification of antiderivative is not currently implemented for this CAS.

```
[In] int((d*x+c)^3*(a+b*sec(f*x+e))^2,x,method=_RETURNVERBOSE)

[Out] 3/f^2*b^2*d^3*ln(1+I*exp(I*(f*x+e)))*x^2+3/f^2*b^2*d^3*ln(1-I*exp(I*(f*x+e)))
)*x^2-6/f^4*b^2*d^3*e^2*ln(exp(I*(f*x+e)))-3/f^4*b^2*d^3*e^2*ln(exp(2*I*(f
*x+e))+1)+3/f^4*b^2*d^3*ln(1+I*exp(I*(f*x+e)))*e^2+3/f^4*b^2*d^3*ln(1-I*exp
(I*(f*x+e)))*e^2-6/f^2*b^2*c^2*d*ln(exp(I*(f*x+e)))+3/f^2*b^2*c^2*d*ln(exp(
2*I*(f*x+e))+1)+4*I/f^4*b^2*e^3*d^3-2*I/f*b^2*d^3*x^3-12*I*a*b*d^3*polylog(
4,-I*exp(I*(f*x+e)))/f^4-12/f^3*b*a*d^3*polylog(3,-I*exp(I*(f*x+e)))*x-12/f
^3*b*d^2*c*a*polylog(3,-I*exp(I*(f*x+e)))+6/f*b*d^2*c*a*ln(1-I*exp(I*(f*x+e
)))*x^2+6/f^3*b*e^2*a*c*d^2*ln(1+I*exp(I*(f*x+e)))-6/f*b*a*c^2*d*ln(1+I*exp
(I*(f*x+e)))*x-12*I/f^2*b*d^2*c*a*polylog(2,I*exp(I*(f*x+e)))*x-12*I/f^3*b*
a*c*d^2*e^2*arctan(exp(I*(f*x+e)))+12*I/f^2*b*a*c^2*d*e*arctan(exp(I*(f*x+e
)))+12*I/f^2*b*d^2*c*a*polylog(2,-I*exp(I*(f*x+e)))*x+6/f^2*b*a*c^2*d*ln(1-
I*exp(I*(f*x+e)))*e-6/f^2*b*a*c^2*d*ln(1+I*exp(I*(f*x+e)))*e+6/f*b*a*c^2*d*
ln(1-I*exp(I*(f*x+e)))*x-6/f^3*b*e^2*a*c*d^2*ln(1-I*exp(I*(f*x+e)))-6/f*b*d
^2*c*a*ln(1+I*exp(I*(f*x+e)))*x^2-12*I/f^2*b^2*c*d^2*e*x-6*I/f^2*b*a*c^2*d*
polylog(2,I*exp(I*(f*x+e)))+6*I/f^2*b*a*d^3*polylog(2,-I*exp(I*(f*x+e)))*x^
2-6*I/f^2*b*a*d^3*polylog(2,I*exp(I*(f*x+e)))*x^2+4*I/f^4*b*a*d^3*e^3*arcta
n(exp(I*(f*x+e)))+6*I/f^2*b*a*c^2*d*polylog(2,-I*exp(I*(f*x+e)))+12*I*a*b*d
^3*polylog(4,I*exp(I*(f*x+e)))/f^4+2*I*b^2*(d^3*x^3+3*c*d^2*x^2+3*c^2*d*x+c
^3)/f/(exp(2*I*(f*x+e))+1)-6*I/f*b^2*c*d^2*x^2-6*I/f^3*b^2*c*d^2*e^2-3*I/f^
3*b^2*c*d^2*polylog(2,-exp(2*I*(f*x+e)))-6*I/f^4*b^2*d^3*polylog(2,-I*exp(I
*(f*x+e)))*e+6*I/f^3*b^2*e^2*d^3*x+3*I/f^4*b^2*e*d^3*polylog(2,-exp(2*I*(f
*x+e)))-6*I/f^3*b^2*d^3*polylog(2,-I*exp(I*(f*x+e)))*x-4*I/f*b*a*c^3*arctan(
exp(I*(f*x+e)))-6*I/f^3*b^2*d^3*polylog(2,I*exp(I*(f*x+e)))*x-6*I/f^4*b^2*d
^3*polylog(2,I*exp(I*(f*x+e)))*e-6/f^3*b^2*e*d^3*ln(exp(2*I*(f*x+e))+1)*x+1
2/f^3*b*d^2*c*a*polylog(3,I*exp(I*(f*x+e)))+6/f^3*b^2*d^3*ln(1-I*exp(I*(f*x
+e)))*e*x+6/f^3*b^2*d^3*ln(1+I*exp(I*(f*x+e)))*e*x+12/f^3*b^2*c*d^2*e*ln(ex
p(I*(f*x+e)))+2/f^4*b*e^3*a*d^3*ln(1-I*exp(I*(f*x+e)))+12/f^3*b*a*d^3*poly
log(3,I*exp(I*(f*x+e)))*x+6/f^2*b^2*c*d^2*ln(exp(2*I*(f*x+e))+1)*x-2/f*b*a*d
^3*ln(1+I*exp(I*(f*x+e)))*x^3+2/f*b*a*d^3*ln(1-I*exp(I*(f*x+e)))*x^3-2/f^4*
b*e^3*a*d^3*ln(1+I*exp(I*(f*x+e)))+1/4*a^2*d^3*x^4+1/4*a^2/d*c^4+3/2*a^2*d*
c^2*x^2+a^2*c^3*x+6/f^4*b^2*d^3*polylog(3,-I*exp(I*(f*x+e)))+6/f^4*b^2*d^3*
polylog(3,I*exp(I*(f*x+e)))+a^2*d^2*c*x^3
```

Maxima [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 3448 vs. $2(322) = 644$.

time = 0.94, size = 3448, normalized size = 9.47

Too large to display

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)^3*(a+b*sec(f*x+e))^2,x, algorithm="maxima")

[Out] 1/4*(4*(f*x + e)*a^2*c^3 + (f*x + e)^4*a^2*d^3/f^3 + 4*(f*x + e)^3*a^2*c*d^
2/f^2 + 6*(f*x + e)^2*a^2*c^2*d/f - 4*(f*x + e)^3*a^2*d^3*e/f^3 - 12*(f*x +
```

$$\begin{aligned}
& e)^2 * a^2 * c * d^2 * e / f^2 - 12 * (f * x + e) * a^2 * c^2 * d * e / f + 8 * a * b * c^3 * \log(\sec(f * x + e) + \tan(f * x + e)) - 24 * a * b * c^2 * d * e * \log(\sec(f * x + e) + \tan(f * x + e)) / f + \\
& 6 * (f * x + e)^2 * a^2 * d^3 * e^2 / f^3 + 12 * (f * x + e) * a^2 * c * d^2 * e^2 / f^2 + 24 * a * b * c * d^2 * e^2 * \log(\sec(f * x + e) + \tan(f * x + e)) / f^2 - 4 * (f * x + e) * a^2 * d^3 * e^3 / f^3 - \\
& 8 * a * b * d^3 * e^3 * \log(\sec(f * x + e) + \tan(f * x + e)) / f^3 + 4 * (4 * b^2 * c^3 * f^3 - 12 * b^2 * c^2 * d^2 * f^2 * e + 12 * b^2 * c * d^2 * f * e^2 - 4 * b^2 * d^3 * e^3 - 4 * ((f * x + e)^3 * a * b * d^3 + 3 * (a * b * c * d^2 * f - a * b * d^3 * e) * (f * x + e)^2 + 3 * (a * b * c^2 * d * f^2 - 2 * a * b * c * d^2 * f * e + a * b * d^3 * e^2) * (f * x + e)^2 + 3 * (a * b * c^2 * d * f^2 - 2 * a * b * c * d^2 * f * e + a * b * d^3 * e^2) * (f * x + e)) * \cos(2 * f * x + 2 * e) + (I * (f * x + e)^3 * a * b * d^3 + 3 * (I * a * b * c * d^2 * f - I * a * b * d^3 * e) * (f * x + e)^2 + 3 * (I * a * b * c^2 * d * f^2 - 2 * I * a * b * c * d^2 * f * e + I * a * b * d^3 * e^2) * (f * x + e)) * \sin(2 * f * x + 2 * e)) * \arctan2(\cos(f * x + e), \sin(f * x + e) + 1) - 4 * ((f * x + e)^3 * a * b * d^3 + 3 * (a * b * c * d^2 * f - a * b * d^3 * e) * (f * x + e)^2 + 3 * (a * b * c^2 * d * f^2 - 2 * a * b * c * d^2 * f * e + a * b * d^3 * e^2) * (f * x + e) + ((f * x + e)^3 * a * b * d^3 + 3 * (a * b * c * d^2 * f - a * b * d^3 * e) * (f * x + e)^2 + 3 * (a * b * c^2 * d * f^2 - 2 * a * b * c * d^2 * f * e + a * b * d^3 * e^2) * (f * x + e)) * \cos(2 * f * x + 2 * e) + (I * (f * x + e)^3 * a * b * d^3 + 3 * (I * a * b * c * d^2 * f - I * a * b * d^3 * e) * (f * x + e)^2 + 3 * (I * a * b * c^2 * d * f^2 - 2 * I * a * b * c * d^2 * f * e + I * a * b * d^3 * e^2) * (f * x + e)) * \sin(2 * f * x + 2 * e)) * \arctan2(\cos(f * x + e), -\sin(f * x + e) + 1) + 6 * ((f * x + e)^2 * b^2 * d^3 + b^2 * c^2 * d^2 * f^2 - 2 * b^2 * c * d^2 * f * e + b^2 * d^3 * e^2 + 2 * (b^2 * c * d^2 * f - b^2 * d^3 * e) * (f * x + e) + ((f * x + e)^2 * b^2 * d^3 + b^2 * c^2 * d^2 * f^2 - 2 * b^2 * c * d^2 * f * e + b^2 * d^3 * e^2 + 2 * (b^2 * c * d^2 * f - b^2 * d^3 * e) * (f * x + e)) * \cos(2 * f * x + 2 * e) - (-I * (f * x + e)^2 * b^2 * d^3 - I * b^2 * c^2 * d * f^2 + 2 * I * b^2 * c * d^2 * f * e - I * b^2 * d^3 * e^2 + 2 * (-I * b^2 * c * d^2 * f + I * b^2 * d^3 * e) * (f * x + e)) * \sin(2 * f * x + 2 * e)) * \arctan2(\sin(2 * f * x + 2 * e), \cos(2 * f * x + 2 * e) + 1) - 4 * ((f * x + e)^3 * b^2 * d^3 + 3 * (b^2 * c * d^2 * f - b^2 * d^3 * e) * (f * x + e)^2 + 3 * (b^2 * c^2 * d * f^2 - 2 * b^2 * c * d^2 * f * e + b^2 * d^3 * e^2) * (f * x + e)) * \cos(2 * f * x + 2 * e) - 6 * ((f * x + e) * b^2 * d^3 + b^2 * c * d^2 * f - b^2 * d^3 * e + ((f * x + e) * b^2 * d^3 + b^2 * c * d^2 * f - b^2 * d^3 * e) * \cos(2 * f * x + 2 * e) + (I * (f * x + e) * b^2 * d^3 + I * b^2 * c * d^2 * f - I * b^2 * d^3 * e) * \sin(2 * f * x + 2 * e)) * \operatorname{dilog}(-e^{-(2 * I * f * x + 2 * I * e)}) - 12 * ((f * x + e)^2 * a * b * d^3 + a * b * c^2 * d * f^2 - 2 * a * b * c * d^2 * f * e + a * b * d^3 * e^2 + 2 * (a * b * c * d^2 * f - a * b * d^3 * e) * (f * x + e) + ((f * x + e)^2 * a * b * d^3 + a * b * c^2 * d * f^2 - 2 * a * b * c * d^2 * f * e + a * b * d^3 * e) * \cos(2 * f * x + 2 * e) + (I * (f * x + e)^2 * a * b * d^3 + I * a * b * c^2 * d * f^2 - 2 * I * a * b * c * d^2 * f * e + I * a * b * d^3 * e^2 + 2 * (I * a * b * c * d^2 * f - I * a * b * d^3 * e) * (f * x + e)) * \sin(2 * f * x + 2 * e)) * \operatorname{dilog}(I * e^{-(I * f * x + I * e)}) + 12 * ((f * x + e)^2 * a * b * d^3 + a * b * c^2 * d * f^2 - 2 * a * b * c * d^2 * f * e + a * b * d^3 * e^2 + 2 * (a * b * c * d^2 * f - a * b * d^3 * e) * (f * x + e) + ((f * x + e)^2 * a * b * d^3 + a * b * c^2 * d * f^2 - 2 * a * b * c * d^2 * f * e + a * b * d^3 * e^2 + 2 * (a * b * c * d^2 * f - a * b * d^3 * e) * \cos(2 * f * x + 2 * e) - (-I * (f * x + e)^2 * a * b * d^3 - I * a * b * c^2 * d * f^2 + 2 * I * a * b * c * d^2 * f * e - I * a * b * d^3 * e^2 + 2 * (-I * a * b * c * d^2 * f + I * a * b * d^3 * e) * (f * x + e)) * \sin(2 * f * x + 2 * e)) * \operatorname{dilog}(-I * e^{-(I * f * x + I * e)}) - 3 * (I * (f * x + e)^2 * b^2 * c^2 * d^2 * f^2 + I * b^2 * c^2 * d * f^2 - 2 * I * b^2 * c * d^2 * f * e + I * b^2 * d^3 * e^2 + 2 * (I * b^2 * c * d^2 * f - I * b^2 * d^3 * e) * (f * x + e) + (I * (f * x + e)^2 * b^2 * c^2 * d^2 * f^2 + I * b^2 * c^2 * d * f^2 - 2 * I * b^2 * c * d^2 * f * e + I * b^2 * d^3 * e^2 + 2 * (I * b^2 * c * d^2 * f - I * b^2 * d^3 * e) * \cos(2 * f * x + 2 * e) - ((f * x + e)^2 * b^2 * c^2 * d^2 * f^2 + b^2 * c^2 * d * f^2 - 2 * b^2 * c * d^2 * f * e + b^2 * d^3 * e^2) * \sin(2 * f * x + 2 * e))
\end{aligned}$$

```
*f*x + 2*e))*log(cos(2*f*x + 2*e)^2 + sin(2*f*x + 2*e)^2 + 2*cos(2*f*x + 2*e) + 1) - 2*(I*(f*x + e)^3*a*b*d^3 + 3*(I*a*b*c*d^2*f - I*a*b*d^3*e)*(f*x + e)^2 + 3*(I*a*b*c^2*d*f^2 - 2*I*a*b*c*d^2*f*e + I*a*b*d^3*e^2)*(f*x + e) + (I*(f*x + e)^3*a*b*d^3 + 3*(I*a*b*c*d^2*f - I*a*b*d^3*e)*(f*x + e)^2 + 3*(I*a*b*c^2*d*f^2 - 2*I*a*b*c*d^2*f*e + I*a*b*d^3*e^2)*(f*x + e))*cos(2*f*x + 2*e) - ((f*x + e)^3*a*b*d^3 + 3*(a*b*c*d^2*f - a*b*d^3*e)*(f*x + e)^2 + 3*(a*b*c^2*d*f^2 - 2*a*b*c*d^2*f*e + a*b*d^3*e^2)*(f*x + e))*sin(2*f*x + 2*e))*log(cos(f*x + e)^2 + sin(f*x + e)^2 + 2*sin(f*x + e) + 1) - 2*(-I*(f*x + e)^3*a*b*d^3 + 3*(-I*a*b*c*d^2*f + I*a*b*d^3*e)*(f*x + e)^2 + 3*(-I*a*b*c^2*d*f^2 + 2*I*a*b*c*d^2*f*e - I*a*b*d^3*e^2)*(f*x + e) + (-I*(f*x + e)^3*a*b*d^3 + 3*(-I*a*b*c*d^2*f + I*a*b*d^3*e)*(f*x + e)^2 + 3*(-I*a*b*c^2*d*f^2 + 2*I*a*b*c*d^2*f*e - I*a*b*d^3*e^2)*(f*x + e))*cos(2*f*x + 2*e) + ((f*x + e)^3*a*b*d^3 + 3*(a*b*c*d^2*f - a*b*d^3*e)*(f*x + e)^2 + 3*(a*b*c^2*d*f^2 - 2*a*b*c*d^2*f*e + a*b*d^3*e^2)*(f*x + e))*sin(2*f*x + 2*e))*log(cos(f*x + e)^2 + sin(f*x + e)^2 - 2*sin(f*x + e) + 1) + 24*(a*b*d^3*cos(2*f*x + 2*e) + I*a*b*d^3*sin(2*f*x + 2*e) + a*b*d^3)*polylog(4, I*e^(I*f*x + I*e)) - 24*(a*b*d^3*cos(2*f*x + 2*e) + I*a*b*d^3*sin(2*f*x + 2*e) + a*b*d^3)*polylog(4, -I*e^(I*f*x + I*e)) - 3*(I*b^2*d^3*cos(2*f*x + 2*e) - b^2*d^3*sin(2*f*x + 2*e) + I*b^2*d^3)*polylog(3, -e^(2*I*f*x + 2*I*e)) - 24*(I*(f*x + e)*a*b*d^3 + I*a*b*c*d^2*f - I*a*b*d^3*e + (I*(f*x + e)*...
```

Fricas [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 1876 vs. 2(322) = 644.

time = 4.28, size = 1876, normalized size = 5.15

Too large to display

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)^3*(a+b*sec(f*x+e))^2,x, algorithm="fricas")
[Out] 1/4*(24*I*a*b*d^3*cos(f*x + e)*polylog(4, I*cos(f*x + e) + sin(f*x + e)) + 24*I*a*b*d^3*cos(f*x + e)*polylog(4, I*cos(f*x + e) - sin(f*x + e)) - 24*I*a*b*d^3*cos(f*x + e)*polylog(4, -I*cos(f*x + e) + sin(f*x + e)) - 24*I*a*b*d^3*cos(f*x + e)*polylog(4, -I*cos(f*x + e) - sin(f*x + e)) - 12*(I*a*b*d^3*f^2*x^2 + I*a*b*c^2*d*f^2 - I*b^2*c*d^2*f + I*(2*a*b*c*d^2*f^2 - b^2*d^3*f)*x)*cos(f*x + e)*dilog(I*cos(f*x + e) + sin(f*x + e)) - 12*(I*a*b*d^3*f^2*x^2 + I*a*b*c^2*d*f^2 + I*b^2*c*d^2*f + I*(2*a*b*c*d^2*f^2 + b^2*d^3*f)*x)*cos(f*x + e)*dilog(I*cos(f*x + e) - sin(f*x + e)) - 12*(-I*a*b*d^3*f^2*x^2 - I*a*b*c^2*d*f^2 + I*b^2*c*d^2*f - I*(2*a*b*c*d^2*f^2 - b^2*d^3*f)*x)*cos(f*x + e)*dilog(-I*cos(f*x + e) + sin(f*x + e)) - 12*(-I*a*b*d^3*f^2*x^2 - I*a*b*c^2*d*f^2 - I*b^2*c*d^2*f - I*(2*a*b*c*d^2*f^2 + b^2*d^3*f)*x)*cos(f*x + e)*dilog(-I*cos(f*x + e) - sin(f*x + e)) + 2*(2*a*b*c^3*f^3 + 3*b^2*c^2*d*f^2 - 2*a*b*d^3*e^3 + 3*(2*a*b*c*d^2*f + b^2*d^3)*e^2 - 6*(a*b*c^2*d*f^2 + b^2*c*d^2*f)*e)*cos(f*x + e)*log(cos(f*x + e) + I*sin(f*x + e) + I) - 2*(2*a*b*c^3*f^3 - 3*b^2*c^2*d*f^2 - 2*a*b*d^3*e^3 + 3*(2*a*b*c*d^2*f - b^2*d^3)*e^2 - 6*(a*b*c^2*d*f^2 + b^2*c*d^2*f)*e)*cos(f*x + e)*log(cos(f*x + e) + I*sin(f*x + e) + I) - 2*(2*a*b*c^3*f^3 - 3*b^2*c^2*d*f^2 - 2*a*b*d^3*e^3 + 3*(2*a*b*c*d^2*f - b^2*d^3)*e^2 - 6*(a*b*c^2*d*f^2 + b^2*c*d^2*f)*e)*cos(f*x + e)*log(cos(f*x + e) + I*sin(f*x + e) + I)
```

$$\begin{aligned}
& 3*e^2 - 6*(a*b*c^2*d*f^2 - b^2*c*d^2*f)*e)*cos(f*x + e)*log(cos(f*x + e) - \\
& I*sin(f*x + e) + I) + 2*(2*a*b*d^3*f^3*x^3 + 2*a*b*d^3*e^3 + 3*(2*a*b*c*d^2*f^3 + b^2*d^3*f^2)*x^2 + 6*(a*b*c^2*d*f^3 + b^2*c*d^2*f^2)*x - 3*(2*a*b*c*d^2*f + b^2*d^3)*e^2 + 6*(a*b*c^2*d*f^2 + b^2*c*d^2*f)*e)*cos(f*x + e)*log(I*cos(f*x + e) + sin(f*x + e) + 1) - 2*(2*a*b*d^3*f^3*x^3 + 2*a*b*d^3*e^3 + 3*(2*a*b*c*d^2*f^3 - b^2*d^3*f^2)*x^2 + 6*(a*b*c^2*d*f^3 - b^2*c*d^2*f^2)*x - 3*(2*a*b*c*d^2*f - b^2*d^3)*e^2 + 6*(a*b*c^2*d*f^2 - b^2*c*d^2*f)*e)*cos(f*x + e)*log(I*cos(f*x + e) - sin(f*x + e) + 1) + 2*(2*a*b*d^3*f^3*x^3 + 2*a*b*d^3*e^3 + 3*(2*a*b*c*d^2*f^3 + b^2*d^3*f^2)*x^2 + 6*(a*b*c^2*d*f^3 + b^2*c*d^2*f^2)*x - 3*(2*a*b*c*d^2*f + b^2*d^3)*e^2 + 6*(a*b*c^2*d*f^2 + b^2*c*d^2*f)*e)*cos(f*x + e)*log(-I*cos(f*x + e) + sin(f*x + e) + 1) - 2*(2*a*b*d^3*f^3*x^3 + 2*a*b*d^3*e^3 + 3*(2*a*b*c*d^2*f^3 - b^2*d^3*f^2)*x^2 + 6*(a*b*c^2*d*f^3 - b^2*c*d^2*f^2)*x - 3*(2*a*b*c*d^2*f - b^2*d^3)*e^2 + 6*(a*b*c^2*d*f^2 - b^2*c*d^2*f)*e)*cos(f*x + e)*log(-I*cos(f*x + e) - sin(f*x + e) + 1) + 2*(2*a*b*c^3*f^3*x^3 + 3*b^2*c^2*d*f^2 - 2*a*b*d^3*e^3 + 3*(2*a*b*c*d^2*f^3 + b^2*d^3)*e^2 - 6*(a*b*c^2*d*f^2 + b^2*c*d^2*f)*e)*cos(f*x + e)*log(-cos(f*x + e) + I*sin(f*x + e) + I) - 2*(2*a*b*c^3*f^3*x^3 - 3*b^2*c^2*d*f^2 - 2*a*b*d^3*e^3 + 3*(2*a*b*c*d^2*f - b^2*d^3)*e^2 - 6*(a*b*c^2*d*f^2 - b^2*c*d^2*f)*e)*cos(f*x + e)*log(-cos(f*x + e) - I*sin(f*x + e) + I) - 12*(2*a*b*d^3*f*x + 2*a*b*c*d^2*f - b^2*d^3)*cos(f*x + e)*polylog(3, I*cos(f*x + e) + sin(f*x + e)) + 12*(2*a*b*d^3*f*x + 2*a*b*c*d^2*f + b^2*d^3)*cos(f*x + e)*polylog(3, I*cos(f*x + e) - sin(f*x + e)) - 12*(2*a*b*d^3*f*x + 2*a*b*c*d^2*f - b^2*d^3)*cos(f*x + e)*polylog(3, -I*cos(f*x + e) - sin(f*x + e)) + 12*(2*a*b*d^3*f*x + 2*a*b*c*d^2*f + b^2*d^3)*cos(f*x + e)*polylog(3, -I*cos(f*x + e) + sin(f*x + e)) + (a^2*d^3*f^4*x^4 + 4*a^2*c*d^2*f^4*x^3 + 6*a^2*c^2*d^2*f^4*x^2 + 4*a^2*c^3*f^4*x)*cos(f*x + e) + 4*(b^2*d^3*f^3*x^3 + 3*b^2*c*d^2*f^3*x^2 + 3*b^2*c^2*d*f^3*x + b^2*c^3*f^3)*sin(f*x + e))/(f^4*cos(f*x + e))
\end{aligned}$$
Sympy [F]

time = 0.00, size = 0, normalized size = 0.00

$$\int (a + b \sec(e + fx))^2 (c + dx)^3 \, dx$$

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)**3*(a+b*sec(f*x+e))**2,x)
[Out] Integral((a + b*sec(e + f*x))**2*(c + d*x)**3, x)
```

Giac [F]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate((d*x+c)^3*(a+b*sec(f*x+e))^2,x, algorithm="giac")`

[Out] `integrate((d*x + c)^3*(b*sec(f*x + e) + a)^2, x)`

Mupad [F]

time = 0.00, size = -1, normalized size = -0.00

$$\int \left(a + \frac{b}{\cos(e + f x)} \right)^2 (c + d x)^3 dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] `int((a + b/cos(e + f*x))^2*(c + d*x)^3,x)`

[Out] `int((a + b/cos(e + f*x))^2*(c + d*x)^3, x)`

$$\text{3.30} \quad \int (c + dx)^2 (a + b \sec(e + fx))^2 dx$$

Optimal. Leaf size=257

$$-\frac{ib^2(c+dx)^2}{f} + \frac{a^2(c+dx)^3}{3d} - \frac{4iab(c+dx)^2 \operatorname{ArcTan}(e^{i(e+fx)})}{f} + \frac{2b^2d(c+dx) \log(1+e^{2i(e+fx)})}{f^2} + \frac{4iabd(c+dx)}{f}$$

[Out] $-\text{I}*\text{b}^2*(\text{d}*\text{x}+\text{c})^2/\text{f}+1/3*\text{a}^2*(\text{d}*\text{x}+\text{c})^3/\text{d}-4*\text{I}*\text{a}*\text{b}*(\text{d}*\text{x}+\text{c})^2*\operatorname{arctan}(\exp(\text{I}*(\text{f}*\text{x}+\text{e}))/\text{f}+2*\text{b}^2*\text{d}*(\text{d}*\text{x}+\text{c})*\ln(1+\exp(2*\text{I}*(\text{f}*\text{x}+\text{e}))/\text{f})^2+4*\text{I}*\text{a}*\text{b}*\text{d}*(\text{d}*\text{x}+\text{c})*\operatorname{polylog}(2,-\text{I}*\exp(\text{I}*(\text{f}*\text{x}+\text{e}))/\text{f})^2-4*\text{I}*\text{a}*\text{b}*\text{d}*(\text{d}*\text{x}+\text{c})*\operatorname{polylog}(2,\text{I}*\exp(\text{I}*(\text{f}*\text{x}+\text{e}))/\text{f})^2-\text{I}*\text{b}^2*\text{d}^2*\operatorname{polylog}(2,-\exp(2*\text{I}*(\text{f}*\text{x}+\text{e}))/\text{f})^3-4*\text{a}*\text{b}*\text{d}^2*\operatorname{polylog}(3,-\text{I}*\exp(\text{I}*(\text{f}*\text{x}+\text{e}))/\text{f})^3+4*\text{a}*\text{b}*\text{d}^2*\operatorname{polylog}(3,\text{I}*\exp(\text{I}*(\text{f}*\text{x}+\text{e}))/\text{f})^3+\text{b}^2*(\text{d}*\text{x}+\text{c})^2*\tan(\text{f}*\text{x}+\text{e})/\text{f}$

Rubi [A]

time = 0.21, antiderivative size = 257, normalized size of antiderivative = 1.00, number of steps used = 14, number of rules used = 10, integrand size = 20, $\frac{\text{number of rules}}{\text{integrand size}} = 0.500$, Rules used = {4275, 4266, 2611, 2320, 6724, 4269, 3800, 2221, 2317, 2438}

$$\frac{a^2(c+dx)^3}{3d} - \frac{4iab(c+dx)^2 \operatorname{ArcTan}(e^{i(e+fx)})}{f} + \frac{4iabd(c+dx) \operatorname{Li}_2(-ie^{i(e+fx)})}{f^2} - \frac{4iabd(c+dx) \operatorname{Li}_3(-ie^{i(e+fx)})}{f^3} - \frac{4abd^2 \operatorname{Li}_3(-ie^{i(e+fx)})}{f^3} + \frac{4abd^2 \operatorname{Li}_3(ie^{i(e+fx)})}{f^3} + \frac{2b^2d(c+dx) \log(1+e^{2i(e+fx)})}{f^2} + \frac{b^2(c+dx)^2 \tan(e+fx)}{f} - \frac{ib^2(c+dx)^2}{f} - \frac{ib^2d \operatorname{Li}_2(-e^{2i(e+fx)})}{f^3}$$

Antiderivative was successfully verified.

[In] $\operatorname{Int}[(c + d*x)^2*(a + b*\operatorname{Sec}[e + f*x])^2, x]$

[Out] $((-\text{I})*\text{b}^2*(\text{c} + \text{d}*\text{x})^2)/\text{f} + (\text{a}^2*(\text{c} + \text{d}*\text{x})^3)/(3*\text{d}) - ((4*\text{I})*\text{a}*\text{b}*(\text{c} + \text{d}*\text{x})^2*\operatorname{ArcTan}[\text{E}^{\text{I}}(\text{e} + \text{f}*\text{x})])/f + (2*\text{b}^2*\text{d}*(\text{c} + \text{d}*\text{x})*\operatorname{Log}[1 + \text{E}^{\text{I}}((2*\text{I})*(\text{e} + \text{f}*\text{x}))]/\text{f})^2 + ((4*\text{I})*\text{a}*\text{b}*\text{d}*(\text{c} + \text{d}*\text{x})*\operatorname{PolyLog}[2, -\text{I}*\text{E}^{\text{I}}(\text{e} + \text{f}*\text{x})])/f^2 - ((4*\text{I})*\text{a}*\text{b}*\text{d}*(\text{c} + \text{d}*\text{x})*\operatorname{PolyLog}[2, \text{I}*\text{E}^{\text{I}}(\text{e} + \text{f}*\text{x})])/f^2 - (\text{I}*\text{b}^2*\text{d}^2*\operatorname{PolyLog}[2, -\text{E}^{\text{I}}((2*\text{I})*(\text{e} + \text{f}*\text{x}))])/f^3 - (4*\text{a}*\text{b}*\text{d}^2*\operatorname{PolyLog}[3, -\text{I}*\text{E}^{\text{I}}(\text{e} + \text{f}*\text{x})])/f^3 + (4*\text{a}*\text{b}*\text{d}^2*\operatorname{PolyLog}[3, \text{I}*\text{E}^{\text{I}}(\text{e} + \text{f}*\text{x})])/f^3 + (\text{b}^2*(\text{c} + \text{d}*\text{x})^2*\operatorname{Tan}[\text{e} + \text{f}*\text{x}])/f$

Rule 2221

```
Int[((F_)^((g_.)*(e_.)+(f_.)*(x_.)))^(n_.)*((c_.)+(d_.)*(x_.))^(m_.))/((a_.)+(b_.)*(F_)^((g_.)*(e_.)+(f_.)*(x_.)))^(n_.)), x_Symbol] :> Simplify[((c+d*x)^m/(b*f*g*n*Log[F]))*Log[1+b*((F^(g*(e+f*x)))^n/a)], x] - Dist[d*(m/(b*f*g*n*Log[F])), Int[(c+d*x)^(m-1)*Log[1+b*((F^(g*(e+f*x)))^n/a)], x], x]; FreeQ[{F, a, b, c, d, e, f, g, n}, x] && IGtQ[m, 0]
```

Rule 2317

```
Int[Log[(a_.)+(b_.)*((F_)^((e_.)*(c_.)+(d_.)*(x_.)))^(n_.))], x_Symbol] :> Dist[1/(d*e*n*Log[F]), Subst[Int[Log[a+b*x]/x, x], x, (F^(e*(c+d*x)))^n], x]; FreeQ[{F, a, b, c, d, e, n}, x] && GtQ[a, 0]
```

Rule 2320

```
Int[u_, x_Symbol] :> With[{v = FunctionOfExponential[u, x]}, Dist[v/D[v, x], Subst[Int[FunctionOfExponentialFunction[u, x]/x, x], x, v], x]] /; FunctionOfExponentialQ[u, x] && !MatchQ[u, (w_)*(a_.)*(v_)^(n_.))^(m_.)] /; FreeQ[{a, m, n}, x] && IntegerQ[m*n] && !MatchQ[u, E^((c_.)*(a_.) + (b_.)*x))*(F_)[v_]] /; FreeQ[{a, b, c}, x] && InverseFunctionQ[F[x]]]
```

Rule 2438

```
Int[Log[(c_.)*(d_.) + (e_.)*(x_)^(n_.))]/(x_), x_Symbol] :> Simp[-PolyLog[2, (-c)*e*x^n]/n, x] /; FreeQ[{c, d, e, n}, x] && EqQ[c*d, 1]
```

Rule 2611

```
Int[Log[1 + (e_.)*((F_)^((c_.)*(a_.) + (b_.)*(x_))))^(n_.)]*((f_.) + (g_.)*(x_)^(m_.), x_Symbol] :> Simp[((-f + g*x)^m)*(PolyLog[2, (-e)*(F^(c*(a + b*x)))^n]/(b*c*n*Log[F])), x] + Dist[g*(m/(b*c*n*Log[F])), Int[(f + g*x)^(m - 1)*PolyLog[2, (-e)*(F^(c*(a + b*x)))^n], x], x] /; FreeQ[{F, a, b, c, e, f, g, n}, x] && GtQ[m, 0]
```

Rule 3800

```
Int[((c_.) + (d_.)*(x_))^(m_)*tan[(e_.) + (f_.)*(x_)], x_Symbol] :> Simp[I*((c + d*x)^(m + 1)/(d*(m + 1))), x] - Dist[2*I, Int[(c + d*x)^m*(E^(2*I*(e + f*x))/(1 + E^(2*I*(e + f*x)))), x], x] /; FreeQ[{c, d, e, f}, x] && IGtQ[m, 0]
```

Rule 4266

```
Int[csc[(e_.) + Pi*(k_.) + (f_.)*(x_)]*((c_.) + (d_.)*(x_))^(m_.), x_Symbol] :> Simp[-2*(c + d*x)^m*(ArcTanh[E^(I*k*Pi)*E^(I*(e + f*x))]/f), x] + (-Dist[d*(m/f), Int[(c + d*x)^(m - 1)*Log[1 - E^(I*k*Pi)*E^(I*(e + f*x))], x], x] + Dist[d*(m/f), Int[(c + d*x)^(m - 1)*Log[1 + E^(I*k*Pi)*E^(I*(e + f*x))], x], x]) /; FreeQ[{c, d, e, f}, x] && IntegerQ[2*k] && IGtQ[m, 0]
```

Rule 4269

```
Int[csc[(e_.) + (f_.)*(x_)]^2*((c_.) + (d_.)*(x_))^(m_.), x_Symbol] :> Simp[((-c + d*x)^m)*(Cot[e + f*x]/f), x] + Dist[d*(m/f), Int[(c + d*x)^(m - 1)*Cot[e + f*x], x], x] /; FreeQ[{c, d, e, f}, x] && GtQ[m, 0]
```

Rule 4275

```
Int[(csc[(e_.) + (f_.)*(x_)]*(b_.) + (a_.))^(n_.)*((c_.) + (d_.)*(x_))^(m_.), x_Symbol] :> Int[ExpandIntegrand[(c + d*x)^m, (a + b*Csc[e + f*x])^n, x],
```

```
x] /; FreeQ[{a, b, c, d, e, f, m}, x] && IGtQ[m, 0] && IGtQ[n, 0]
```

Rule 6724

```
Int[PolyLog[n_, (c_.)*(a_.) + (b_.)*(x_.)]^p]/((d_.) + (e_.)*(x_)), x_Symbol] :> Simp[PolyLog[n + 1, c*(a + b*x)^p]/(e*p), x] /; FreeQ[{a, b, c, d, e, n, p}, x] && EqQ[b*d, a*e]
```

Rubi steps

$$\begin{aligned}
\int (c+dx)^2(a+b \sec(e+fx))^2 dx &= \int (a^2(c+dx)^2 + 2ab(c+dx)^2 \sec(e+fx) + b^2(c+dx)^2 \sec^2(e+fx)) \\
&= \frac{a^2(c+dx)^3}{3d} + (2ab) \int (c+dx)^2 \sec(e+fx) dx + b^2 \int (c+dx)^2 \sec^2(e+fx) dx \\
&= \frac{a^2(c+dx)^3}{3d} - \frac{4iab(c+dx)^2 \tan^{-1}(e^{i(e+fx)})}{f} + \frac{b^2(c+dx)^2 \tan(e+fx)}{f} \\
&= -\frac{ib^2(c+dx)^2}{f} + \frac{a^2(c+dx)^3}{3d} - \frac{4iab(c+dx)^2 \tan^{-1}(e^{i(e+fx)})}{f} + \frac{4iabd(c+dx)}{f} \\
&= -\frac{ib^2(c+dx)^2}{f} + \frac{a^2(c+dx)^3}{3d} - \frac{4iab(c+dx)^2 \tan^{-1}(e^{i(e+fx)})}{f} + \frac{2b^2d(c+dx)}{f} \\
&= -\frac{ib^2(c+dx)^2}{f} + \frac{a^2(c+dx)^3}{3d} - \frac{4iab(c+dx)^2 \tan^{-1}(e^{i(e+fx)})}{f} + \frac{2b^2d(c+dx)}{f} \\
&= -\frac{ib^2(c+dx)^2}{f} + \frac{a^2(c+dx)^3}{3d} - \frac{4iab(c+dx)^2 \tan^{-1}(e^{i(e+fx)})}{f} + \frac{2b^2d(c+dx)}{f}
\end{aligned}$$

Mathematica [A]

time = 7.92, size = 503, normalized size = 1.96

Antiderivative was successfully verified.

```
[In] Integrate[(c + d*x)^2*(a + b*Sec[e + f*x])^2, x]
[Out] (a^2*x*(3*c^2 + 3*c*d*x + d^2*x^2))/3 + (b^2*(c + d*x)^2*Sin[(f*x)/2])/(f*(Cos[e/2] - Sin[e/2])*(Cos[(e + f*x)/2] - Sin[(e + f*x)/2])) + (b^2*(c + d*x)^2*Sin[(f*x)/2])/(f*(Cos[e/2] + Sin[e/2])*(Cos[(e + f*x)/2] + Sin[(e + f*x)/2])) + (b*((-2*I)*b*c*d*f^2*x - I*b*d^2*f^2*x^2 - (4*I)*a*c^2*f^2*ArcTan[Cos[e + f*x] + I*Sin[e + f*x]] - (8*I)*a*c*d*f^2*x*ArcTan[Cos[e + f*x] + I*Sin[e + f*x]] - (4*I)*a*d^2*f^2*x^2*ArcTan[Cos[e + f*x] + I*Sin[e + f*x]] +
```

$$2*b*c*d*f*\log[1 + \cos[2*(e + f*x)] + I*\sin[2*(e + f*x)]] + 2*b*d^2*f*x*\log[1 + \cos[2*(e + f*x)] + I*\sin[2*(e + f*x)]] - (4*I)*a*d*f*(c + d*x)*\text{PolyLog}[2, I*\cos[e + f*x] - \sin[e + f*x]] + (4*I)*a*d*f*(c + d*x)*\text{PolyLog}[2, (-I)*\cos[e + f*x] + \sin[e + f*x]] - I*b*d^2*\text{PolyLog}[2, -\cos[2*(e + f*x)] - I*\sin[2*(e + f*x)]] + 4*a*d^2*\text{PolyLog}[3, I*\cos[e + f*x] - \sin[e + f*x]] - 4*a*d^2*\text{PolyLog}[3, (-I)*\cos[e + f*x] + \sin[e + f*x]] + 2*b*c*d*f^2*x*\tan[e] + b*d^2*f^2*x^2*\tan[e])]/f^3$$

Maple [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 661 vs. $2(232) = 464$.

time = 0.80, size = 662, normalized size = 2.58

method	result
risch	$-\frac{4ibd^2a\text{polylog}(2, ie^{i(fx+e)})x}{f^2} + \frac{4ibd^2a\text{polylog}(2, -ie^{i(fx+e)})x}{f^2} + \frac{4ibacd\text{polylog}(2, -ie^{i(fx+e)})}{f^2} - \frac{4ibacd\text{polylog}(2, ie^{i(fx+e)})}{f^2}$

Verification of antiderivative is not currently implemented for this CAS.

```
[In] int((d*x+c)^2*(a+b*sec(f*x+e))^2,x,method=_RETURNVERBOSE)
[Out] -4*I/f^2*b*d^2*a*polylog(2,I*exp(I*(f*x+e)))*x+4*I/f^2*b*d^2*a*polylog(2,-I*exp(I*(f*x+e)))*x+4*I/f^2*b*a*c*d*polylog(2,-I*exp(I*(f*x+e)))-4*I/f^3*b*a*d^2*e^2*arctan(exp(I*(f*x+e)))-4*I/f^2*b*a*c*d*polylog(2,I*exp(I*(f*x+e)))+4/f^2*b*a*c*d*ln(1-I*exp(I*(f*x+e)))*e-4/f^2*b*a*c*d*ln(1+I*exp(I*(f*x+e)))*e+4/f*b*a*c*d*ln(1-I*exp(I*(f*x+e)))*x-4/f*b*a*c*d*ln(1+I*exp(I*(f*x+e)))*x+8*I/f^2*b*a*c*d*e*arctan(exp(I*(f*x+e)))+2/f^3*b*e^2*a*d^2*ln(1+I*exp(I*(f*x+e)))-2/f^3*b*e^2*a*d^2*ln(1-I*exp(I*(f*x+e)))+2/f*b*d^2*a*ln(1-I*exp(I*(f*x+e)))*x^2-2/f*b*d^2*a*ln(1+I*exp(I*(f*x+e)))*x^2-4*I/f*b*a*c^2*arctan(exp(I*(f*x+e)))-4*I/f^2*b^2*d^2*e*x+2/f^2*b^2*d^2*ln(exp(2*I*(f*x+e))+1)*x-4*a*b*d^2*polylog(3,-I*exp(I*(f*x+e)))/f^3+4*a*b*d^2*polylog(3,I*exp(I*(f*x+e)))/f^3-I*b^2*d^2*polylog(2,-exp(2*I*(f*x+e)))/f^3+2*I*b^2*(d^2*x^2+2*c*d*x+c^2)/f/(exp(2*I*(f*x+e))+1)+1/3*a^2*d^2*x^3+4/f^3*b^2*d^2*e*ln(exp(I*(f*x+e)))-4/f^2*b^2*c*d*ln(exp(I*(f*x+e)))+2/f^2*b^2*c*d*ln(exp(2*I*(f*x+e))+1)-2*I/f*b^2*d^2*x^2-2*I/f^3*b^2*d^2*e^2+1/3*a^2/d*c^3+a^2*d*c*x^2+a^2*c^2*x
```

Maxima [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 1766 vs. $2(228) = 456$.

time = 0.70, size = 1766, normalized size = 6.87

Too large to display

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)^2*(a+b*sec(f*x+e))^2,x, algorithm="maxima")
[Out] 1/3*(3*(f*x + e)*a^2*c^2 + (f*x + e)^3*a^2*d^2/f^2 + 3*(f*x + e)^2*a^2*c*d/f - 3*(f*x + e)^2*a^2*d^2*e/f^2 - 6*(f*x + e)*a^2*c*d*e/f + 6*a*b*c^2*log(sec(f*x + e) + tan(f*x + e)) - 12*a*b*c*d*e*log(sec(f*x + e) + tan(f*x + e))
```

```

/f + 3*(f*x + e)*a^2*d^2*e^2/f^2 + 6*a*b*d^2*e^2*log(sec(f*x + e) + tan(f*x
+ e))/f^2 + 3*(2*b^2*c^2*f^2 - 4*b^2*c*d*f*e + 2*b^2*d^2*e^2 - 2*((f*x + e)
^2*a*b*d^2 + 2*(a*b*c*d*f - a*b*d^2*e)*(f*x + e) + ((f*x + e)^2*a*b*d^2 +
2*(a*b*c*d*f - a*b*d^2*e)*(f*x + e)))*cos(2*f*x + 2*e) + (I*(f*x + e)^2*a*b*
d^2 + 2*(I*a*b*c*d*f - I*a*b*d^2*e)*(f*x + e))*sin(2*f*x + 2*e))*arctan2(co
s(f*x + e), sin(f*x + e) + 1) - 2*((f*x + e)^2*a*b*d^2 + 2*(a*b*c*d*f - a*b*
d^2*e)*(f*x + e) + ((f*x + e)^2*a*b*d^2 + 2*(a*b*c*d*f - a*b*d^2*e)*(f*x +
e)))*cos(2*f*x + 2*e) + (I*(f*x + e)^2*a*b*d^2 + 2*(I*a*b*c*d*f - I*a*b*d^2
*e)*(f*x + e))*sin(2*f*x + 2*e))*arctan2(cos(f*x + e), -sin(f*x + e) + 1) +
2*((f*x + e)*b^2*d^2 + b^2*c*d*f - b^2*d^2*e + ((f*x + e)*b^2*d^2 + b^2*c*
d*f - b^2*d^2*e)*cos(2*f*x + 2*e) - (-I*(f*x + e)*b^2*d^2 - I*b^2*c*d*f + I
*b^2*d^2*e)*sin(2*f*x + 2*e))*arctan2(sin(2*f*x + 2*e), cos(2*f*x + 2*e) +
1) - 2*((f*x + e)^2*b^2*d^2 + 2*(b^2*c*d*f - b^2*d^2*e)*(f*x + e))*cos(2*f*
x + 2*e) - (b^2*d^2*cos(2*f*x + 2*e) + I*b^2*d^2*sin(2*f*x + 2*e) + b^2*d^2
)*dilog(-e^(2*I*f*x + 2*I*e)) - 4*((f*x + e)*a*b*d^2 + a*b*c*d*f - a*b*d^2*
e + ((f*x + e)*a*b*d^2 + a*b*c*d*f - a*b*d^2*e)*cos(2*f*x + 2*e) + (I*(f*x
+ e)*a*b*d^2 + I*a*b*c*d*f - I*a*b*d^2*e)*sin(2*f*x + 2*e))*dilog(I*e^(I*f*
x + I*e)) + 4*((f*x + e)*a*b*d^2 + a*b*c*d*f - a*b*d^2*e + ((f*x + e)*a*b*d
^2 + a*b*c*d*f - a*b*d^2*e)*cos(2*f*x + 2*e) - (-I*(f*x + e)*a*b*d^2 - I*a*
b*c*d*f + I*a*b*d^2*e)*sin(2*f*x + 2*e))*dilog(-I*e^(I*f*x + I*e)) + (-I*(f
*x + e)*b^2*d^2 - I*b^2*c*d*f + I*b^2*d^2*e + (-I*(f*x + e)*b^2*d^2 - I*b^2
*c*d*f + I*b^2*d^2*e)*cos(2*f*x + 2*e) + ((f*x + e)*b^2*d^2 + b^2*c*d*f - b
^2*d^2*e)*sin(2*f*x + 2*e))*log(cos(2*f*x + 2*e)^2 + sin(2*f*x + 2*e)^2 + 2
*cos(2*f*x + 2*e) + 1) + (-I*(f*x + e)^2*a*b*d^2 - 2*(I*a*b*c*d*f - I*a*b*d
^2*e)*(f*x + e) + (-I*(f*x + e)^2*a*b*d^2 - 2*(I*a*b*c*d*f - I*a*b*d^2*e)*(f
*x + e))*cos(2*f*x + 2*e) + ((f*x + e)^2*a*b*d^2 + 2*(a*b*c*d*f - a*b*d^2*
e)*(f*x + e))*sin(2*f*x + 2*e))*log(cos(f*x + e)^2 + sin(f*x + e)^2 + 2*sin
(f*x + e) + 1) + (I*(f*x + e)^2*a*b*d^2 - 2*(-I*a*b*c*d*f + I*a*b*d^2*e)*(f
*x + e) + (I*(f*x + e)^2*a*b*d^2 - 2*(-I*a*b*c*d*f + I*a*b*d^2*e)*(f*x + e)
)*cos(2*f*x + 2*e) - ((f*x + e)^2*a*b*d^2 + 2*(a*b*c*d*f - a*b*d^2*e)*(f*x
+ e))*sin(2*f*x + 2*e))*log(cos(f*x + e)^2 + sin(f*x + e)^2 - 2*sin(f*x + e
) + 1) - 4*(I*a*b*d^2*cos(2*f*x + 2*e) - a*b*d^2*sin(2*f*x + 2*e) + I*a*b*d
^2)*polylog(3, I*e^(I*f*x + I*e)) - 4*(-I*a*b*d^2*cos(2*f*x + 2*e) + a*b*d^
2*sin(2*f*x + 2*e) - I*a*b*d^2)*polylog(3, -I*e^(I*f*x + I*e)) - 2*(I*(f*x
+ e)^2*b^2*d^2 + 2*(I*b^2*c*d*f - I*b^2*d^2*e)*(f*x + e))*sin(2*f*x + 2*e))
/(-I*f^2*cos(2*f*x + 2*e) + f^2*sin(2*f*x + 2*e) - I*f^2)/f

```

Fricas [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 1111 vs. 2(228) = 456.

time = 3.38, size = 1111, normalized size = 4.32

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate((d*x+c)^2*(a+b*sec(f*x+e))^2,x, algorithm="fricas")`

```
[Out] -1/3*(6*a*b*d^2*cos(f*x + e)*polylog(3, I*cos(f*x + e) + sin(f*x + e)) - 6*a*b*d^2*cos(f*x + e)*polylog(3, I*cos(f*x + e) - sin(f*x + e)) + 6*a*b*d^2*cos(f*x + e)*polylog(3, -I*cos(f*x + e) + sin(f*x + e)) - 6*a*b*d^2*cos(f*x + e)*polylog(3, -I*cos(f*x + e) - sin(f*x + e)) + 3*(2*I*a*b*d^2*f*x + 2*I*a*b*c*d*f - I*b^2*d^2)*cos(f*x + e)*dilog(I*cos(f*x + e) + sin(f*x + e)) + 3*(2*I*a*b*d^2*f*x + 2*I*a*b*c*d*f + I*b^2*d^2)*cos(f*x + e)*dilog(I*cos(f*x + e) - sin(f*x + e)) + 3*(-2*I*a*b*d^2*f*x - 2*I*a*b*c*d*f + I*b^2*d^2)*cos(f*x + e)*dilog(-I*cos(f*x + e) + sin(f*x + e)) + 3*(-2*I*a*b*d^2*f*x - 2*I*a*b*c*d*f - I*b^2*d^2)*cos(f*x + e)*dilog(-I*cos(f*x + e) - sin(f*x + e)) - 3*(a*b*c^2*f^2 + b^2*c*d*f + a*b*d^2*e^2 - (2*a*b*c*d*f + b^2*d^2)*e)*cos(f*x + e)*log(cos(f*x + e) + I*sin(f*x + e) + I) + 3*(a*b*c^2*f^2 - b^2*c*d*f + a*b*d^2*e^2 - (2*a*b*c*d*f - b^2*d^2)*e)*cos(f*x + e)*log(cos(f*x + e) - I*sin(f*x + e) + I) - 3*(a*b*d^2*f^2*x^2 - a*b*d^2*e^2 + (2*a*b*c*d*f^2 + b^2*d^2*f)*x + (2*a*b*c*d*f + b^2*d^2)*e)*cos(f*x + e)*log(I*cos(f*x + e) + sin(f*x + e) + 1) + 3*(a*b*d^2*f^2*x^2 - a*b*d^2*e^2 + (2*a*b*c*d*f^2 - b^2*d^2*f)*x + (2*a*b*c*d*f - b^2*d^2)*e)*cos(f*x + e)*log(I*cos(f*x + e) - sin(f*x + e) + 1) - 3*(a*b*d^2*f^2*x^2 - a*b*d^2*e^2 + (2*a*b*c*d*f^2 + b^2*d^2*f)*x + (2*a*b*c*d*f + b^2*d^2)*e)*cos(f*x + e)*log(-I*cos(f*x + e) + sin(f*x + e) + 1) + 3*(a*b*d^2*f^2*x^2 - a*b*d^2*e^2 + (2*a*b*c*d*f^2 - b^2*d^2*f)*x + (2*a*b*c*d*f - b^2*d^2)*e)*cos(f*x + e)*log(-I*cos(f*x + e) - sin(f*x + e) + 1) - 3*(a*b*c^2*f^2 + b^2*c*d*f + a*b*d^2*e^2 - (2*a*b*c*d*f + b^2*d^2)*e)*cos(f*x + e)*log(-cos(f*x + e) + I*sin(f*x + e) + I) + 3*(a*b*c^2*f^2 - b^2*c*d*f + a*b*d^2*e^2 - (2*a*b*c*d*f - b^2*d^2)*e)*cos(f*x + e)*log(-cos(f*x + e) - I*sin(f*x + e) + I) - (a^2*d^2*f^3*x^3 + 3*a^2*c*d*f^3*x^2 + 3*a^2*c^2*f^3*x)*cos(f*x + e) - 3*(b^2*d^2*f^2*x^2 + 2*b^2*c*d*f^2*x + b^2*c^2*f^2)*sin(f*x + e))/(f^3*cos(f*x + e))
```

Sympy [F]

time = 0.00, size = 0, normalized size = 0.00

$$\int (a + b \sec(e + fx))^2 (c + dx)^2 \, dx$$

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)**2*(a+b*sec(f*x+e))**2,x)
```

```
[Out] Integral((a + b*sec(e + f*x))**2*(c + d*x)**2, x)
```

Giac [F]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)^2*(a+b*sec(f*x+e))^2,x, algorithm="giac")
```

[Out] integrate((d*x + c)^2*(b*sec(f*x + e) + a)^2, x)

Mupad [F]

time = 0.00, size = -1, normalized size = -0.00

$$\int \left(a + \frac{b}{\cos(e + f x)} \right)^2 (c + d x)^2 dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] int((a + b/cos(e + f*x))^2*(c + d*x)^2,x)

[Out] int((a + b/cos(e + f*x))^2*(c + d*x)^2, x)

$$3.31 \quad \int (c + dx)(a + b \sec(e + fx))^2 dx$$

Optimal. Leaf size=131

$$\frac{a^2(c + dx)^2}{2d} - \frac{4iab(c + dx)\text{ArcTan}(e^{i(e+fx)})}{f} + \frac{b^2d\log(\cos(e + fx))}{f^2} + \frac{2iabd\text{PolyLog}(2, -ie^{i(e+fx)})}{f^2} - \frac{2iabd\text{PolyLog}(2, e^{i(e+fx)})}{f^2}$$

[Out] $\frac{1}{2}a^2(c + dx)^2 - \frac{4iab(c + dx)\text{ArcTan}(e^{i(e+fx)})}{f} + \frac{b^2d\log(\cos(e + fx))}{f^2} + \frac{2iabd\text{PolyLog}(2, -ie^{i(e+fx)})}{f^2} - \frac{2iabd\text{PolyLog}(2, e^{i(e+fx)})}{f^2}$

Rubi [A]

time = 0.08, antiderivative size = 131, normalized size of antiderivative = 1.00, number of steps used = 9, number of rules used = 6, integrand size = 18, $\frac{\text{number of rules}}{\text{integrand size}} = 0.333$, Rules used = {4275, 4266, 2317, 2438, 4269, 3556}

$$\frac{a^2(c + dx)^2}{2d} - \frac{4iab(c + dx)\text{ArcTan}(e^{i(e+fx)})}{f} + \frac{2iabd\text{Li}_2(-ie^{i(e+fx)})}{f^2} - \frac{2iabd\text{Li}_2(ie^{i(e+fx)})}{f^2} + \frac{b^2(c + dx)\tan(e + fx)}{f} + \frac{b^2d\log(\cos(e + fx))}{f^2}$$

Antiderivative was successfully verified.

[In] $\text{Int}[(c + d*x)*(a + b*\text{Sec}[e + f*x])^2, x]$

[Out] $(a^2(c + d*x)^2)/(2*d) - ((4*I)*a*b*(c + d*x)*\text{ArcTan}[E^{(I*(e + f*x))}])/f + (b^2*d*\log[\cos[e + f*x]])/f^2 + ((2*I)*a*b*d*\text{PolyLog}[2, (-I)*E^{(I*(e + f*x))}])/f^2 - ((2*I)*a*b*d*\text{PolyLog}[2, I*E^{(I*(e + f*x))}])/f^2 + (b^2*(c + d*x)*\text{Tan}[e + f*x])/f$

Rule 2317

$\text{Int}[\text{Log}[(a_) + (b_)*((F_)^((e_.)*(c_.) + (d_.)*(x_.)))^(n_.)], x_Symbol] :> \text{Dist}[1/(d*e*n*\log[F]), \text{Subst}[\text{Int}[\text{Log}[a + b*x]/x, x], x, (F^(e*(c + d*x)))^n], x] /; \text{FreeQ}[\{F, a, b, c, d, e, n\}, x] \&& \text{GtQ}[a, 0]$

Rule 2438

$\text{Int}[\text{Log}[(c_.)*(d_.) + (e_.)*(x_.)^(n_.)]/(x_), x_Symbol] :> \text{Simp}[-\text{PolyLog}[2, (-c)*e*x^n]/n, x] /; \text{FreeQ}[\{c, d, e, n\}, x] \&& \text{EqQ}[c*d, 1]$

Rule 3556

$\text{Int}[\tan[(c_.) + (d_.)*(x_.)], x_Symbol] :> \text{Simp}[-\text{Log}[\text{RemoveContent}[\cos[c + d*x], x]]/d, x] /; \text{FreeQ}[\{c, d\}, x]$

Rule 4266

$\text{Int}[\csc[(e_.) + \text{Pi}*(k_.) + (f_.)*(x_.)]*((c_.) + (d_.)*(x_.))^(m_.), x_Symbol] :> \text{Simp}[-2*(c + d*x)^m * (\text{ArcTanh}[E^{(I*k*\text{Pi})}*E^{(I*(e + f*x))}]/f), x] + (-\text{Di}$

```
st[d*(m/f), Int[(c + d*x)^(m - 1)*Log[1 - E^(I*k*Pi)*E^(I*(e + f*x))], x], x] + Dist[d*(m/f), Int[(c + d*x)^(m - 1)*Log[1 + E^(I*k*Pi)*E^(I*(e + f*x))], x], x]) /; FreeQ[{c, d, e, f}, x] && IntegerQ[2*k] && IGtQ[m, 0]
```

Rule 4269

```
Int[csc[(e_.) + (f_.)*(x_)]^2*((c_.) + (d_.)*(x_))^(m_.), x_Symbol] :> Simplify[(-(c + d*x)^m)*(Cot[e + f*x]/f), x] + Dist[d*(m/f), Int[(c + d*x)^(m - 1)*Cot[e + f*x], x, x] /; FreeQ[{c, d, e, f}, x] && GtQ[m, 0]
```

Rule 4275

```
Int[(csc[(e_.) + (f_.)*(x_.)]*(b_.) + (a_.))^(n_.)*((c_.) + (d_.)*(x_.))^m_.], x_Symbol] :> Int[ExpandIntegrand[(c + d*x)^m, (a + b*Csc[e + f*x])^n, x], x] /; FreeQ[{a, b, c, d, e, f, m}, x] && IGtQ[m, 0] && IGtQ[n, 0]
```

Rubi steps

$$\begin{aligned}
\int (c + dx)(a + b \sec(e + fx))^2 dx &= \int (a^2(c + dx) + 2ab(c + dx) \sec(e + fx) + b^2(c + dx) \sec^2(e + fx)) dx \\
&= \frac{a^2(c + dx)^2}{2d} + (2ab) \int (c + dx) \sec(e + fx) dx + b^2 \int (c + dx) \sec^2(e + fx) dx \\
&= \frac{a^2(c + dx)^2}{2d} - \frac{4iab(c + dx) \tan^{-1}(e^{i(e+fx)})}{f} + \frac{b^2(c + dx) \tan(e + fx)}{f} \\
&= \frac{a^2(c + dx)^2}{2d} - \frac{4iab(c + dx) \tan^{-1}(e^{i(e+fx)})}{f} + \frac{b^2 d \log(\cos(e + fx))}{f^2} + \frac{b^2}{f} \\
&= \frac{a^2(c + dx)^2}{2d} - \frac{4iab(c + dx) \tan^{-1}(e^{i(e+fx)})}{f} + \frac{b^2 d \log(\cos(e + fx))}{f^2} + \frac{2b^2}{f}
\end{aligned}$$

Mathematica [B] Both result and optimal contain complex but leaf count is larger than twice the leaf count of optimal. 566 vs. $2(131) = 262$.
 time = 4.36, size = 566, normalized size = 4.32

Want to add a new feature? Visit [https://github.com/username/repo](#) and submit a pull request!

```
[In] Integrate[(c + d*x)*(a + b*Sec[e + f*x])^2,x]
[Out] 
$$\frac{(-a^2(e + f x) \cdot (-2 c f + d(e - f x))) + (2 b^2 f (c + d x) \cdot \sin[(e + f x)/2])}{(\cos[(e + f x)/2] - \sin[(e + f x)/2])} + \frac{(2 b^2 f (c + d x) \cdot \sin[(e + f x)/2])}{(\cos[(e + f x)/2] + \sin[(e + f x)/2])} + (2 b \cdot (-b d \log[\sec[(e + f x)/2]]))$$

```

$$\begin{aligned} & \left(\frac{b^2 d^2}{4} + b^2 a d e - 2 a^2 c f \right) \ln[1 - \tan[(e + f x)/2]] + (b^2 d^2 - 2 a^2 d e + 2 a^2 c f) \ln[1 + \tan[(e + f x)/2]] - (2 I) a d \ln[1 + I \tan[(e + f x)/2]] * \ln[(1/2 - I/2) * (1 + \tan[(e + f x)/2])] + \text{PolyLog}[2, ((1 + I) - (1 - I) \tan[(e + f x)/2]) / 2] + (2 I) a d \ln[1 + I \tan[(e + f x)/2]] * \ln[(-1/2 - I/2) * (-1 + \tan[(e + f x)/2])] + \text{PolyLog}[2, (1/2 + I/2) * (-I + \tan[(e + f x)/2])] + (2 I) a d \ln[1 - I \tan[(e + f x)/2]] * \ln[(1/2 + I/2) * (1 + \tan[(e + f x)/2])] + \text{PolyLog}[2, (-1/2 - I/2) * (I + \tan[(e + f x)/2])] - (2 I) a d \ln[1 - I \tan[(e + f x)/2]] * \ln[(-1/2 + I/2) * (-1 + \tan[(e + f x)/2])] + \text{PolyLog}[2, (1/2 - I/2) * (I + \tan[(e + f x)/2])]) * (-2 a f (c + d x) + b d \sin[e + f x]) / (2 a (d e - c f - I d \ln[1 - I \tan[(e + f x)/2]]) + I d \ln[1 + I \tan[(e + f x)/2]] + b d \sin[e + f x]) / (2 f^2) \end{aligned}$$
Maple [A]

time = 0.56, size = 232, normalized size = 1.77

method	result
derivativedivides	$\frac{a^2 c (f x + e) - \frac{a^2 d e (f x + e)}{f} + \frac{a^2 d (f x + e)^2}{2 f} + 2 a b c \ln(\sec(f x + e) + \tan(f x + e)) - \frac{2 a b d e \ln(\sec(f x + e) + \tan(f x + e))}{f} + \frac{2 a b d (- (f x + e))}{f}}{f}$
default	$\frac{a^2 c (f x + e) - \frac{a^2 d e (f x + e)}{f} + \frac{a^2 d (f x + e)^2}{2 f} + 2 a b c \ln(\sec(f x + e) + \tan(f x + e)) - \frac{2 a b d e \ln(\sec(f x + e) + \tan(f x + e))}{f} + \frac{2 a b d (- (f x + e))}{f}}{f}$
risch	$\frac{a^2 d x^2}{2} + a^2 c x + \frac{2 i b^2 (d x + c)}{f (e^{2 i (f x + e)} + 1)} + \frac{b^2 d \ln(e^{2 i (f x + e)} + 1)}{f^2} - \frac{2 b^2 d \ln(e^{i (f x + e)})}{f^2} - \frac{4 i b a c \arctan(e^{i (f x + e)})}{f} + \frac{4 i b^2 d x}{f}$

Verification of antiderivative is not currently implemented for this CAS.

```
[In] int((d*x+c)*(a+b*sec(f*x+e))^2,x,method=_RETURNVERBOSE)
[Out] 1/f*(a^2*c*(f*x+e)-a^2/f*d*e*(f*x+e)+1/2*a^2/f*d*(f*x+e)^2+2*a*b*c*ln(sec(f*x+e)+tan(f*x+e))-2/f*a*b*d*e*ln(sec(f*x+e)+tan(f*x+e))+2/f*a*b*d*(-(f*x+e))*ln(1+I*exp(I*(f*x+e)))+(f*x+e)*ln(1-I*exp(I*(f*x+e)))+I*dilog(1+I*exp(I*(f*x+e)))-I*dilog(1-I*exp(I*(f*x+e)))+b^2*c*tan(f*x+e)-1/f*b^2*d*e*tan(f*x+e)+1/f*b^2*d*((f*x+e)*tan(f*x+e)+ln(cos(f*x+e))))
```

Maxima [F]

time = 0.00, size = 0, normalized size = 0.00

Failed to integrate

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)*(a+b*sec(f*x+e))^2,x, algorithm="maxima")
[Out] 1/2*(a^2*d*f^2*x^2 + 2*a^2*c*f^2*x + (a^2*d*f^2*x^2 + 2*a^2*c*f^2*x)*cos(2*f*x + 2*e)^2 + (a^2*d*f^2*x^2 + 2*a^2*c*f^2*x)*sin(2*f*x + 2*e)^2 + 2*(a^2*d*f^2*x^2 + 2*a^2*c*f^2*x)*cos(2*f*x + 2*e) + 8*(a*b*d*f^3*cos(2*f*x + 2*e)^2 + a*b*d*f^3*sin(2*f*x + 2*e)^2 + 2*a*b*d*f^3*cos(2*f*x + 2*e) + a*b*d*f^3)*integrate((x*cos(2*f*x + 2*e)*cos(f*x + e) + x*sin(2*f*x + 2*e)*sin(f*x + e)))
```

```
+ e) + x*cos(f*x + e))/(f*cos(2*f*x + 2*e)^2 + f*sin(2*f*x + 2*e)^2 + 2*f*c
os(2*f*x + 2*e) + f), x) + (b^2*d*cos(2*f*x + 2*e)^2 + b^2*d*sin(2*f*x + 2*
e)^2 + 2*b^2*d*cos(2*f*x + 2*e) + b^2*d)*log(cos(2*f*x + 2*e)^2 + sin(2*f*x
+ 2*e)^2 + 2*cos(2*f*x + 2*e) + 1) + 2*(a*b*c*f*cos(2*f*x + 2*e)^2 + a*b*c
*f*sin(2*f*x + 2*e)^2 + 2*a*b*c*f*cos(2*f*x + 2*e) + a*b*c*f)*log(cos(f*x +
e)^2 + sin(f*x + e)^2 + 2*sin(f*x + e) + 1) - 2*(a*b*c*f*cos(2*f*x + 2*e)^
2 + a*b*c*f*sin(2*f*x + 2*e)^2 + 2*a*b*c*f*cos(2*f*x + 2*e) + a*b*c*f)*log(
cos(f*x + e)^2 + sin(f*x + e)^2 - 2*sin(f*x + e) + 1) + 4*(b^2*d*f*x + b^2*
c*f)*sin(2*f*x + 2*e))/(f^2*cos(2*f*x + 2*e)^2 + f^2*sin(2*f*x + 2*e)^2 + 2
*f^2*cos(2*f*x + 2*e) + f^2)
```

Fricas [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 552 vs. $2(116) = 232$.

time = 3.30, size = 552, normalized size = 4.21

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)*(a+b*sec(f*x+e))^2,x, algorithm="fricas")
[Out] 1/2*(-2*I*a*b*d*cos(f*x + e)*dilog(I*cos(f*x + e) + sin(f*x + e)) - 2*I*a*b
*d*cos(f*x + e)*dilog(I*cos(f*x + e) - sin(f*x + e)) + 2*I*a*b*d*cos(f*x +
e)*dilog(-I*cos(f*x + e) + sin(f*x + e)) + 2*I*a*b*d*cos(f*x + e)*dilog(-I*
cos(f*x + e) - sin(f*x + e)) + (2*a*b*c*f - 2*a*b*d*e + b^2*d)*cos(f*x + e)
*log(cos(f*x + e) + I*sin(f*x + e) + I) - (2*a*b*c*f - 2*a*b*d*e - b^2*d)*c
os(f*x + e)*log(cos(f*x + e) - I*sin(f*x + e) + I) + 2*(a*b*d*f*x + a*b*d*e
)*cos(f*x + e)*log(I*cos(f*x + e) + sin(f*x + e) + 1) - 2*(a*b*d*f*x + a*b*
d*e)*cos(f*x + e)*log(I*cos(f*x + e) - sin(f*x + e) + 1) + 2*(a*b*d*f*x + a
*b*d*e)*cos(f*x + e)*log(-I*cos(f*x + e) + sin(f*x + e) + 1) - 2*(a*b*d*f*x
+ a*b*d*e)*cos(f*x + e)*log(-I*cos(f*x + e) - sin(f*x + e) + 1) + (2*a*b*c
*f - 2*a*b*d*e + b^2*d)*cos(f*x + e)*log(-cos(f*x + e) + I*sin(f*x + e) + I
) - (2*a*b*c*f - 2*a*b*d*e - b^2*d)*cos(f*x + e)*log(-cos(f*x + e) - I*sin(
f*x + e) + I) + (a^2*d*f^2*x^2 + 2*a^2*c*f^2*x)*cos(f*x + e) + 2*(b^2*d*f*x
+ b^2*c*f)*sin(f*x + e))/(f^2*cos(f*x + e))
```

Sympy [F]

time = 0.00, size = 0, normalized size = 0.00

$$\int (a + b \sec(e + fx))^2 (c + dx) \, dx$$

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)*(a+b*sec(f*x+e))**2,x)
[Out] Integral((a + b*sec(e + f*x))**2*(c + d*x), x)
```

Giac [F]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate((d*x+c)*(a+b*sec(f*x+e))^2,x, algorithm="giac")`

[Out] `integrate((d*x + c)*(b*sec(f*x + e) + a)^2, x)`

Mupad [F]

time = 0.00, size = -1, normalized size = -0.01

$$\int \left(a + \frac{b}{\cos(e + f x)} \right)^2 (c + d x) \, dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] `int((a + b/cos(e + f*x))^2*(c + d*x),x)`

[Out] `int((a + b/cos(e + f*x))^2*(c + d*x), x)`

3.32 $\int \frac{(a+b \sec(e+fx))^2}{c+dx} dx$

Optimal. Leaf size=23

$$\text{Int}\left(\frac{(a+b \sec(e+fx))^2}{c+dx}, x\right)$$

[Out] Unintegrable((a+b*sec(f*x+e))^2/(d*x+c),x)

Rubi [A]

time = 0.04, antiderivative size = 0, normalized size of antiderivative = 0.00, number of steps used = 0, number of rules used = 0, integrand size = 0, $\frac{\text{number of rules}}{\text{integrand size}}$ = 0.000, Rules used = {}

$$\int \frac{(a+b \sec(e+fx))^2}{c+dx} dx$$

Verification is not applicable to the result.

[In] Int[(a + b*Sec[e + f*x])^2/(c + d*x),x]

[Out] Defer[Int][(a + b*Sec[e + f*x])^2/(c + d*x), x]

Rubi steps

$$\int \frac{(a+b \sec(e+fx))^2}{c+dx} dx = \int \frac{(a+b \sec(e+fx))^2}{c+dx} dx$$

Mathematica [A]

time = 38.28, size = 0, normalized size = 0.00

$$\int \frac{(a+b \sec(e+fx))^2}{c+dx} dx$$

Verification is not applicable to the result.

[In] Integrate[(a + b*Sec[e + f*x])^2/(c + d*x),x]

[Out] Integrate[(a + b*Sec[e + f*x])^2/(c + d*x), x]

Maple [A]

time = 0.27, size = 0, normalized size = 0.00

$$\int \frac{(a+b \sec(fx+e))^2}{dx+c} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\int ((a+b \sec(fx+e))^2/(dx+c), x)$
[Out] $\int ((a+b \sec(fx+e))^2/(dx+c), x)$

Maxima [A]

time = 0.00, size = 0, normalized size = 0.00

Failed to integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((a+b \sec(fx+e))^2/(dx+c), x, \text{algorithm}=\text{"maxima"})$
[Out] $((a^2 d f x + a^2 c f) * \cos(2 f x + 2 e)^2 * \log(dx + c) + 2 b^2 d \sin(2 f x + 2 e) + (a^2 d f x + a^2 c f) * \log(dx + c) * \sin(2 f x + 2 e)^2 + 2 (a^2 d f x + a^2 c f) * \cos(2 f x + 2 e) * \log(dx + c) + (d^2 f x + c d f + (d^2 f x + c d f) * \cos(2 f x + 2 e)^2 + (d^2 f x + c d f) * \sin(2 f x + 2 e)^2 + 2 (d^2 f x + c d f) * \cos(2 f x + 2 e)) * \text{integrate}(2 (2 (a b d f x + a b c f) * \cos(2 f x + 2 e) * \cos(f x + e) + 2 (a b d f x + a b c f) * \cos(f x + e) + (b^2 d + 2 (a b d f x + a b c f) * \sin(f x + e)) * \sin(2 f x + 2 e)) / (d^2 f x^2 + 2 c d f x + c^2 f + (d^2 f x^2 + 2 c d f x + c^2 f) * \cos(2 f x + 2 e)^2 + (d^2 f x^2 + 2 c d f x + c^2 f) * \sin(2 f x + 2 e)^2 + 2 (d^2 f x^2 + 2 c d f x + c^2 f) * \cos(2 f x + 2 e)), x) + (a^2 d f x + a^2 c f) * \log(dx + c)) / (d^2 f x + c d f + (d^2 f x + c d f) * \cos(2 f x + 2 e)^2 + (d^2 f x + c d f) * \sin(2 f x + 2 e)^2 + 2 (d^2 f x + c d f) * \cos(2 f x + 2 e))$

Fricas [A]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((a+b \sec(fx+e))^2/(dx+c), x, \text{algorithm}=\text{"fricas"})$
[Out] $\text{integral}((b^2 \sec(f x + e)^2 + 2 a b \sec(f x + e) + a^2) / (d x + c), x)$

Sympy [A]

time = 0.00, size = 0, normalized size = 0.00

$$\int \frac{(a + b \sec(e + f x))^2}{c + d x} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((a+b \sec(fx+e))^2/(dx+c), x)$
[Out] $\text{Integral}((a + b \sec(e + f x))^2 / (c + d x), x)$

Giac [A]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate((a+b*sec(f*x+e))^2/(d*x+c),x, algorithm="giac")`

[Out] `integrate((b*sec(f*x + e) + a)^2/(d*x + c), x)`

Mupad [A]

time = 0.00, size = -1, normalized size = -0.04

$$\int \frac{\left(a + \frac{b}{\cos(e+fx)}\right)^2}{c + dx} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] `int((a + b/cos(e + f*x))^2/(c + d*x),x)`

[Out] `int((a + b/cos(e + f*x))^2/(c + d*x), x)`

3.33 $\int \frac{(a+b \sec(e+fx))^2}{(c+dx)^2} dx$

Optimal. Leaf size=23

$$\text{Int}\left(\frac{(a+b \sec(e+fx))^2}{(c+dx)^2}, x\right)$$

[Out] Unintegrable((a+b*sec(f*x+e))^2/(d*x+c)^2,x)

Rubi [A]

time = 0.03, antiderivative size = 0, normalized size of antiderivative = 0.00, number of steps used = 0, number of rules used = 0, integrand size = 0, $\frac{\text{number of rules}}{\text{integrand size}} = 0.000$, Rules used = {}

$$\int \frac{(a+b \sec(e+fx))^2}{(c+dx)^2} dx$$

Verification is not applicable to the result.

[In] Int[(a + b*Sec[e + f*x])^2/(c + d*x)^2,x]

[Out] Defer[Int][(a + b*Sec[e + f*x])^2/(c + d*x)^2, x]

Rubi steps

$$\int \frac{(a+b \sec(e+fx))^2}{(c+dx)^2} dx = \int \frac{(a+b \sec(e+fx))^2}{(c+dx)^2} dx$$

Mathematica [A]

time = 29.23, size = 0, normalized size = 0.00

$$\int \frac{(a+b \sec(e+fx))^2}{(c+dx)^2} dx$$

Verification is not applicable to the result.

[In] Integrate[(a + b*Sec[e + f*x])^2/(c + d*x)^2,x]

[Out] Integrate[(a + b*Sec[e + f*x])^2/(c + d*x)^2, x]

Maple [A]

time = 0.29, size = 0, normalized size = 0.00

$$\int \frac{(a+b \sec(fx+e))^2}{(dx+c)^2} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\int ((a+b\sec(fx+e))^2/(dx+c)^2) dx$

[Out] $\int ((a+b\sec(fx+e))^2/(dx+c)^2) dx$

Maxima [A]

time = 0.00, size = 0, normalized size = 0.00

Failed to integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((a+b\sec(fx+e))^2/(dx+c)^2, x, \text{algorithm}=\text{"maxima"})$

[Out]
$$\begin{aligned} & - (a^2 d f x + a^2 c f - 2 b^2 d \sin(2 f x + 2 e) + (a^2 d f x + a^2 c f) \cos(2 f x + 2 e))^2 \\ & + (a^2 d f x + a^2 c f) \sin(2 f x + 2 e)^2 + 2 (a^2 d f x + a^2 c f) \cos(2 f x + 2 e) - (d^3 f x^2 + 2 c d^2 f x + c^2 d f + (d^3 f x^2 + 2 c d^2 f x + c^2 d f) \cos(2 f x + 2 e))^2 \\ & + (d^3 f x^2 + 2 c d^2 f x + c^2 d f) \sin(2 f x + 2 e)^2 + 2 (d^3 f x^2 + 2 c d^2 f x + c^2 d f) \cos(2 f x + 2 e) \text{integrate}(4 ((a b d f x + a b c f) \cos(2 f x + 2 e) \cos(f x + e) + (a b d f x + a b c f) \cos(f x + e) + (b^2 d + (a b d f x + a b c f) \sin(f x + e)) \sin(2 f x + 2 e)) / (d^3 f x^3 + 3 c d^2 f x^2 + 3 c^2 d f x + c^3 f + (d^3 f x^3 + 3 c d^2 f x^2 + 3 c^2 d f x + c^3 f) \cos(2 f x + 2 e))^2 + (d^3 f x^3 + 3 c d^2 f x^2 + 3 c^2 d f x + c^3 f) \sin(2 f x + 2 e)^2 + 2 ((d^3 f x^3 + 3 c d^2 f x^2 + 3 c^2 d f x + c^3 f) \cos(2 f x + 2 e)), x)) / (d^3 f x^2 + 2 c d^2 f x + c^2 d f + (d^3 f x^2 + 2 c d^2 f x + c^2 d f) \cos(2 f x + 2 e))^2 + (d^3 f x^2 + 2 c d^2 f x + c^2 d f) \sin(2 f x + 2 e)^2 + 2 ((d^3 f x^2 + 2 c d^2 f x + c^2 d f) \cos(2 f x + 2 e))) \end{aligned}$$

Fricas [A]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((a+b\sec(fx+e))^2/(dx+c)^2, x, \text{algorithm}=\text{"fricas"})$

[Out] $\text{integral}((b^2 \sec(f x + e)^2 + 2 a b \sec(f x + e) + a^2) / (d^2 x^2 + 2 c d x + c^2), x)$

Sympy [A]

time = 0.00, size = 0, normalized size = 0.00

$$\int \frac{(a + b \sec(e + fx))^2}{(c + dx)^2} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((a+b\sec(fx+e))^2/(dx+c)^2, x)$

[Out] $\text{Integral}((a + b*\sec(e + f*x))^2/(c + d*x)^2, x)$

Giac [A]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((a+b*\sec(f*x+e))^2/(d*x+c)^2, x, \text{algorithm}=\text{"giac"})$

[Out] $\text{integrate}((b*\sec(f*x + e) + a)^2/(d*x + c)^2, x)$

Mupad [A]

time = 0.00, size = -1, normalized size = -0.04

$$\int \frac{\left(a + \frac{b}{\cos(e+f x)}\right)^2}{(c + d x)^2} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{int}((a + b/\cos(e + f*x))^2/(c + d*x)^2, x)$

[Out] $\text{int}((a + b/\cos(e + f*x))^2/(c + d*x)^2, x)$

$$3.34 \quad \int \frac{(c+dx)^3}{a+b \sec(e+fx)} dx$$

Optimal. Leaf size=526

$$\frac{(c+dx)^4}{4ad} + \frac{ib(c+dx)^3 \log \left(1 + \frac{ae^{i(e+fx)}}{b-\sqrt{-a^2+b^2}} \right)}{a\sqrt{-a^2+b^2}f} - \frac{ib(c+dx)^3 \log \left(1 + \frac{ae^{i(e+fx)}}{b+\sqrt{-a^2+b^2}} \right)}{a\sqrt{-a^2+b^2}f} + \frac{3bd(c+dx)^2 \text{PolyLog}[3, -\frac{ae^{i(e+fx)}}{b-\sqrt{-a^2+b^2}}]}{a\sqrt{-a^2+b^2}}$$

[Out] $\frac{1}{4}*(d*x+c)^4/a/d+I*b*(d*x+c)^3*\ln(1+a*\exp(I*(f*x+e))/(b-(-a^2+b^2)^(1/2)))$
 $/a/f/(-a^2+b^2)^(1/2)-I*b*(d*x+c)^3*\ln(1+a*\exp(I*(f*x+e))/(b+(-a^2+b^2)^(1/2)))$
 $/a/f/(-a^2+b^2)^(1/2)+3*b*d*(d*x+c)^2*\text{polylog}(2, -a*\exp(I*(f*x+e))/(b-(-a^2+b^2)^(1/2)))$
 $/a/f^2/(-a^2+b^2)^(1/2)-3*b*d*(d*x+c)^2*\text{polylog}(2, -a*\exp(I*(f*x+e))/(b+(-a^2+b^2)^(1/2)))$
 $/a/f^2/(-a^2+b^2)^(1/2)+6*I*b*d^2*(d*x+c)*\text{polylog}(3, -a*\exp(I*(f*x+e))/(b-(-a^2+b^2)^(1/2)))$
 $/a/f^3/(-a^2+b^2)^(1/2)-6*I*b*d^2*(d*x+c)*\text{polylog}(3, -a*\exp(I*(f*x+e))/(b+(-a^2+b^2)^(1/2)))$
 $/a/f^3/(-a^2+b^2)^(1/2)-6*b*d^3*\text{polylog}(4, -a*\exp(I*(f*x+e))/(b-(-a^2+b^2)^(1/2)))$
 $/a/f^4/(-a^2+b^2)^(1/2)+6*b*d^3*\text{polylog}(4, -a*\exp(I*(f*x+e))/(b+(-a^2+b^2)^(1/2)))$
 $/a/f^4/(-a^2+b^2)^(1/2)$

Rubi [A]

time = 0.74, antiderivative size = 526, normalized size of antiderivative = 1.00, number of steps used = 14, number of rules used = 8, integrand size = 20, $\frac{\text{number of rules}}{\text{integrand size}} = 0.400$, Rules used = {4276, 3402, 2296, 2221, 2611, 6744, 2320, 6724}

$$\frac{6ibd^2(c+dx)\text{Li}_1\left(\frac{-ae^{i(e+fx)}}{b-\sqrt{b^2-a^2}}\right)}{af^3\sqrt{b^2-a^2}} - \frac{6ibd^2(c+dx)\text{Li}_1\left(\frac{-ae^{i(e+fx)}}{b+\sqrt{b^2-a^2}}\right)}{af^3\sqrt{b^2-a^2}} + \frac{3bd(c+dx)^2\text{Li}_2\left(\frac{-ae^{i(e+fx)}}{b-\sqrt{b^2-a^2}}\right)}{af^2\sqrt{b^2-a^2}} - \frac{3bd(c+dx)^2\text{Li}_2\left(\frac{-ae^{i(e+fx)}}{b+\sqrt{b^2-a^2}}\right)}{af^2\sqrt{b^2-a^2}} - \frac{ib(c+dx)^3 \log \left(1 + \frac{ae^{i(e+fx)}}{b-\sqrt{b^2-a^2}} \right)}{af\sqrt{b^2-a^2}} - \frac{ib(c+dx)^3 \log \left(1 + \frac{ae^{i(e+fx)}}{b+\sqrt{b^2-a^2}} \right)}{af\sqrt{b^2-a^2}} + \frac{6bd^3\text{Li}_3\left(\frac{-ae^{i(e+fx)}}{b-\sqrt{b^2-a^2}}\right)}{af^4\sqrt{b^2-a^2}} + \frac{6bd^3\text{Li}_3\left(\frac{-ae^{i(e+fx)}}{b+\sqrt{b^2-a^2}}\right)}{af^4\sqrt{b^2-a^2}} + \frac{(c+dx)^4}{4ad}$$

Antiderivative was successfully verified.

[In] $\text{Int}[(c+d*x)^3/(a+b*\text{Sec}[e+f*x]), x]$

[Out] $(c+d*x)^4/(4*a*d) + (I*b*(c+d*x)^3*\text{Log}[1+(a*\text{E}^{(I*(e+f*x))}/(b-\text{Sqr}t[-a^2+b^2]))/(a*\text{Sqrt}[-a^2+b^2]*f)] - (I*b*(c+d*x)^3*\text{Log}[1+(a*\text{E}^{(I*(e+f*x))}/(b+\text{Sqr}[-a^2+b^2]))/(a*\text{Sqrt}[-a^2+b^2]*f)] + (3*b*d*(c+d*x)^2*\text{PolyLog}[2, -((a*\text{E}^{(I*(e+f*x))}/(b-\text{Sqr}[-a^2+b^2]))/(a*\text{Sqr}[-a^2+b^2]*f^2)] - (3*b*d*(c+d*x)^2*\text{PolyLog}[2, -((a*\text{E}^{(I*(e+f*x))}/(b+\text{Sqr}[-a^2+b^2]))/(a*\text{Sqr}[-a^2+b^2]*f^2)] + ((6*I)*b*d^2*(c+d*x)*\text{PolyLog}[3, -((a*\text{E}^{(I*(e+f*x))}/(b-\text{Sqr}[-a^2+b^2]))/(a*\text{Sqr}[-a^2+b^2]*f^3)] - ((6*I)*b*d^2*(c+d*x)*\text{PolyLog}[3, -((a*\text{E}^{(I*(e+f*x))}/(b+\text{Sqr}[-a^2+b^2]))/(a*\text{Sqr}[-a^2+b^2]*f^3)] - (6*b*d^3*\text{PolyLog}[4, -((a*\text{E}^{(I*(e+f*x))}/(b-\text{Sqr}[-a^2+b^2]))/(a*\text{Sqr}[-a^2+b^2]*f^4)] + (6*b*d^3*\text{PolyLog}[4, -((a*\text{E}^{(I*(e+f*x))}/(b+\text{Sqr}[-a^2+b^2]))/(a*\text{Sqr}[-a^2+b^2]*f^4)]))$

Rule 2221

$\text{Int}[((F_)((g_.)*(e_.)+(f_.)*(x_.)))^n_*((c_.)+(d_.)*(x_.))^m_*)/((a_.)+(b_.)*(F_)((g_.)*(e_.)+(f_.)*(x_.)))^n_*), \text{x_Symbol}] \Rightarrow \text{Simp}$

```
[((c + d*x)^m/(b*f*g*n*Log[F]))*Log[1 + b*((F^(g*(e + f*x)))^n/a)], x] - Dist[d*(m/(b*f*g*n*Log[F])), Int[(c + d*x)^(m - 1)*Log[1 + b*((F^(g*(e + f*x)))^n/a)], x], x] /; FreeQ[{F, a, b, c, d, e, f, g, n}, x] && IGtQ[m, 0]
```

Rule 2296

```
Int[((F_)^(u_)*(f_.) + (g_.)*(x_.))^m_.)/((a_.) + (b_.)*(F_)^(u_) + (c_.)*(F_)^(v_.)), x_Symbol] :> With[{q = Rt[b^2 - 4*a*c, 2]}, Dist[2*(c/q), Int[(f + g*x)^m*(F^u/(b - q + 2*c*F^u)), x], x] - Dist[2*(c/q), Int[(f + g*x)^m*(F^u/(b + q + 2*c*F^u)), x], x]] /; FreeQ[{F, a, b, c, f, g}, x] && EqQ[v, 2*u] && LinearQ[u, x] && NeQ[b^2 - 4*a*c, 0] && IGtQ[m, 0]
```

Rule 2320

```
Int[u_, x_Symbol] :> With[{v = FunctionOfExponential[u, x]}, Dist[v/D[v, x], Subst[Int[FunctionOfExponentialFunction[u, x]/x, x], x, v], x]] /; FunctionOfExponentialQ[u, x] && !MatchQ[u, (w_)*((a_.)*(v_)^n_.)^m_.] /; FreeQ[{a, m, n}, x] && IntegerQ[m*n] && !MatchQ[u, E^((c_.)*(a_.) + (b_.)*x))*(F_[v_]) /; FreeQ[{a, b, c}, x] && InverseFunctionQ[F[x]]]
```

Rule 2611

```
Int[Log[1 + (e_.)*((F_)^((c_.)*(a_.) + (b_.)*(x_))))^n_.]*((f_.) + (g_.)*(x_.))^m_., x_Symbol] :> Simp[(-(f + g*x)^m)*(PolyLog[2, (-e)*(F^(c*(a + b*x)))^n]/(b*c*n*Log[F])), x] + Dist[g*(m/(b*c*n*Log[F])), Int[(f + g*x)^(m - 1)*PolyLog[2, (-e)*(F^(c*(a + b*x)))^n], x], x] /; FreeQ[{F, a, b, c, e, f, g, n}, x] && GtQ[m, 0]
```

Rule 3402

```
Int[((c_.) + (d_.)*(x_.))^m_.)/((a_.) + (b_.)*sin[(e_.) + Pi*(k_.) + (f_.)*(x_.)]), x_Symbol] :> Dist[2, Int[(c + d*x)^m*E^(I*Pi*(k - 1/2))*(E^(I*(e + f*x))/(b + 2*a*E^(I*Pi*(k - 1/2))*E^(I*(e + f*x)) - b*E^(2*I*k*Pi)*E^(2*I*(e + f*x))), x], x] /; FreeQ[{a, b, c, d, e, f}, x] && IntegerQ[2*k] && NeQ[a^2 - b^2, 0] && IGtQ[m, 0]
```

Rule 4276

```
Int[(csc[(e_.) + (f_.)*(x_.)]*(b_.) + (a_.))^n_.)*((c_.) + (d_.)*(x_.))^m_., x_Symbol] :> Int[ExpandIntegrand[(c + d*x)^m, 1/(Sin[e + f*x]^n/(b + a*Sin[e + f*x])^n)], x] /; FreeQ[{a, b, c, d, e, f}, x] && ILtQ[n, 0] && IGtQ[m, 0]
```

Rule 6724

```
Int[PolyLog[n_, (c_.)*(a_.) + (b_.)*(x_.))^p_.]/((d_.) + (e_.)*(x_.)), x_Symbol] :> Simp[PolyLog[n + 1, c*(a + b*x)^p]/(e*p), x] /; FreeQ[{a, b, c, d}
```

, e, n, p}, x] && EqQ[b*d, a*e]

Rule 6744

```
Int[((e_.) + (f_ .)*(x_))^(m_ .)*PolyLog[n_, (d_ .)*((F_)^((c_ .)*(a_ .) + (b_ .)*(x_)))^p_ .], x_Symbol] :> Simp[(e + f*x)^m*(PolyLog[n + 1, d*(F^(c*(a + b*x)))^p]/(b*c*p*Log[F])), x] - Dist[f*(m/(b*c*p*Log[F])), Int[(e + f*x)^(m - 1)*PolyLog[n + 1, d*(F^(c*(a + b*x)))^p], x], x] /; FreeQ[{F, a, b, c, d, e, f, n, p}, x] && GtQ[m, 0]
```

Rubi steps

$$\begin{aligned}
 \int \frac{(c+dx)^3}{a+b\sec(e+fx)} dx &= \int \left(\frac{(c+dx)^3}{a} - \frac{b(c+dx)^3}{a(b+a\cos(e+fx))} \right) dx \\
 &= \frac{(c+dx)^4}{4ad} - \frac{b \int \frac{(c+dx)^3}{b+a\cos(e+fx)} dx}{a} \\
 &= \frac{(c+dx)^4}{4ad} - \frac{(2b) \int \frac{e^{i(e+fx)}(c+dx)^3}{a+2be^{i(e+fx)}+ae^{2i(e+fx)}} dx}{a} \\
 &= \frac{(c+dx)^4}{4ad} - \frac{(2b) \int \frac{e^{i(e+fx)}(c+dx)^3}{2b-2\sqrt{-a^2+b^2}+2ae^{i(e+fx)}} dx}{\sqrt{-a^2+b^2}} + \frac{(2b) \int \frac{e^{i(e+fx)}(c+dx)^3}{2b+2\sqrt{-a^2+b^2}+2ae^{i(e+fx)}} dx}{\sqrt{-a^2+b^2}} \\
 &= \frac{(c+dx)^4}{4ad} + \frac{ib(c+dx)^3 \log \left(1 + \frac{ae^{i(e+fx)}}{b-\sqrt{-a^2+b^2}} \right)}{a\sqrt{-a^2+b^2}f} - \frac{ib(c+dx)^3 \log \left(1 + \frac{ae^{i(e+fx)}}{b+\sqrt{-a^2+b^2}} \right)}{a\sqrt{-a^2+b^2}f} \\
 &= \frac{(c+dx)^4}{4ad} + \frac{ib(c+dx)^3 \log \left(1 + \frac{ae^{i(e+fx)}}{b-\sqrt{-a^2+b^2}} \right)}{a\sqrt{-a^2+b^2}f} - \frac{ib(c+dx)^3 \log \left(1 + \frac{ae^{i(e+fx)}}{b+\sqrt{-a^2+b^2}} \right)}{a\sqrt{-a^2+b^2}f} \\
 &= \frac{(c+dx)^4}{4ad} + \frac{ib(c+dx)^3 \log \left(1 + \frac{ae^{i(e+fx)}}{b-\sqrt{-a^2+b^2}} \right)}{a\sqrt{-a^2+b^2}f} - \frac{ib(c+dx)^3 \log \left(1 + \frac{ae^{i(e+fx)}}{b+\sqrt{-a^2+b^2}} \right)}{a\sqrt{-a^2+b^2}f} \\
 &= \frac{(c+dx)^4}{4ad} + \frac{ib(c+dx)^3 \log \left(1 + \frac{ae^{i(e+fx)}}{b-\sqrt{-a^2+b^2}} \right)}{a\sqrt{-a^2+b^2}f} - \frac{ib(c+dx)^3 \log \left(1 + \frac{ae^{i(e+fx)}}{b+\sqrt{-a^2+b^2}} \right)}{a\sqrt{-a^2+b^2}f}
 \end{aligned}$$

Mathematica [A]

time = 0.97, size = 449, normalized size = 0.85

$$\frac{(b+a \cos(e+f x)) \left(4 \left(4 c^3+6 c^2 d x+4 c d^2 x^2+d^3 x^3\right)+\frac{4 i b \left((c+d x)^3 \log \left(\frac{-c e+i f x}{i \sqrt{-a^2+b^2}}\right)-(c+d x)^2 \log \left(\frac{i e+i f x}{i \sqrt{-a^2+b^2}}\right)\right) \operatorname{PolyLog}\left(\frac{-c e+i f x}{i \sqrt{-a^2+b^2}}, j\right)-\operatorname{PolyLog}\left(\frac{-c e+i f x}{i \sqrt{-a^2+b^2}}, j\right) \operatorname{PolyLog}\left(\frac{-c e+i f x}{i \sqrt{-a^2+b^2}}, j\right)+\operatorname{PolyLog}\left(\frac{-c e+i f x}{i \sqrt{-a^2+b^2}}, j\right) \operatorname{PolyLog}\left(\frac{-c e+i f x}{i \sqrt{-a^2+b^2}}, j\right)-i \operatorname{PolyLog}\left(\frac{-c e+i f x}{i \sqrt{-a^2+b^2}}, j\right)\right)}{\sqrt{-a^2+b^2} j} \sec(e+f x)}{4 a (a+b \sec(e+f x))}$$

Antiderivative was successfully verified.

[In] Integrate[(c + d*x)^3/(a + b*Sec[e + f*x]),x]

[Out] $((b + a \cos(e + f x)) * (x * (4*c^3 + 6*c^2*d*x + 4*c*d^2*x^2 + d^3*x^3) + ((4*I)*b*((c + d*x)^3*Log[1 - (a*E^(I*(e + f*x)))/(-b + Sqrt[-a^2 + b^2])]) - (c + d*x)^3*Log[1 + (a*E^(I*(e + f*x)))/(b + Sqrt[-a^2 + b^2])] + (3*d*((-I)*f^2*(c + d*x)^2*PolyLog[2, (a*E^(I*(e + f*x)))/(-b + Sqrt[-a^2 + b^2])] + 2*d*(f*(c + d*x)*PolyLog[3, (a*E^(I*(e + f*x)))/(-b + Sqrt[-a^2 + b^2])] + I*d*PolyLog[4, (a*E^(I*(e + f*x)))/(-b + Sqrt[-a^2 + b^2])]))/f^3 + ((3*I)*d*(f^2*(c + d*x)^2*PolyLog[2, -(a*E^(I*(e + f*x)))/(b + Sqrt[-a^2 + b^2])] + (2*I)*d*f*(c + d*x)*PolyLog[3, -(a*E^(I*(e + f*x)))/(b + Sqrt[-a^2 + b^2])] - 2*d^2*PolyLog[4, -(a*E^(I*(e + f*x)))/(b + Sqrt[-a^2 + b^2])])/f^3)/(Sqrt[-a^2 + b^2]*f))*Sec[e + f*x])/(4*a*(a + b*Sec[e + f*x]))$

Maple [F]

time = 0.29, size = 0, normalized size = 0.00

$$\int \frac{(dx+c)^3}{a+b \sec(fx+e)} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] int((d*x+c)^3/(a+b*sec(f*x+e)),x)

[Out] int((d*x+c)^3/(a+b*sec(f*x+e)),x)

Maxima [F(-2)]

time = 0.00, size = 0, normalized size = 0.00

Exception raised: ValueError

Verification of antiderivative is not currently implemented for this CAS.

[In] integrate((d*x+c)^3/(a+b*sec(f*x+e)),x, algorithm="maxima")

[Out] Exception raised: ValueError >> Computation failed since Maxima requested additional constraints; using the 'assume' command before evaluation *may* help (example of legal syntax is 'assume(4*a^2-4*b^2>0)', see 'assume?' for more de

Fricas [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 2373 vs. 2(474) = 948.

time = 6.70, size = 2373, normalized size = 4.51

Too large to display

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)^3/(a+b*sec(f*x+e)),x, algorithm="fricas")
[Out] 1/4*((a^2 - b^2)*d^3*f^4*x^4 + 4*(a^2 - b^2)*c*d^2*f^4*x^3 + 6*(a^2 - b^2)*c^2*d*f^4*x^2 + 4*(a^2 - b^2)*c^3*f^4*x + 12*a*b*d^3*sqrt(-(a^2 - b^2)/a^2)*polylog(4, -(b*cos(f*x + e) + I*b*sin(f*x + e)) + (a*cos(f*x + e) + I*a*sin(f*x + e))*sqrt(-(a^2 - b^2)/a^2))/a - 12*a*b*d^3*sqrt(-(a^2 - b^2)/a^2)*polylog(4, -(b*cos(f*x + e) + I*b*sin(f*x + e)) - (a*cos(f*x + e) + I*a*sin(f*x + e))*sqrt(-(a^2 - b^2)/a^2))/a + 12*a*b*d^3*sqrt(-(a^2 - b^2)/a^2)*polylog(4, -(b*cos(f*x + e) - I*b*sin(f*x + e)) + (a*cos(f*x + e) - I*a*sin(f*x + e))*sqrt(-(a^2 - b^2)/a^2))/a - 12*a*b*d^3*sqrt(-(a^2 - b^2)/a^2)*polylog(4, -(b*cos(f*x + e) - I*b*sin(f*x + e)) - (a*cos(f*x + e) - I*a*sin(f*x + e))*sqrt(-(a^2 - b^2)/a^2))/a) - 6*(a*b*d^3*f^2*x^2 + 2*a*b*c*d^2*f^2*x + a*b*c^2*d*f^2)*sqrt(-(a^2 - b^2)/a^2)*dilog(-(b*cos(f*x + e) + I*b*sin(f*x + e)) + (a*cos(f*x + e) + I*a*sin(f*x + e))*sqrt(-(a^2 - b^2)/a^2) + a)/a + 1) + 6*(a*b*d^3*f^2*x^2 + 2*a*b*c*d^2*f^2*x + a*b*c^2*d*f^2)*sqrt(-(a^2 - b^2)/a^2)*dilog(-(b*cos(f*x + e) + I*b*sin(f*x + e)) - (a*cos(f*x + e) + I*a*sin(f*x + e))*sqrt(-(a^2 - b^2)/a^2) + a)/a + 1) - 6*(a*b*d^3*f^2*x^2 + 2*a*b*c*d^2*f^2*x + a*b*c^2*d*f^2)*sqrt(-(a^2 - b^2)/a^2)*dilog(-(b*cos(f*x + e) - I*b*sin(f*x + e)) + (a*cos(f*x + e) - I*a*sin(f*x + e))*sqrt(-(a^2 - b^2)/a^2) + a)/a + 1) + 6*(a*b*d^3*f^2*x^2 + 2*a*b*c*d^2*f^2*x + a*b*c^2*d*f^2)*sqrt(-(a^2 - b^2)/a^2)*dilog(-(b*cos(f*x + e) - I*b*sin(f*x + e)) - (a*cos(f*x + e) - I*a*sin(f*x + e))*sqrt(-(a^2 - b^2)/a^2) + a)/a + 1) - 2*(-I*a*b*c^3*f^3 + 3*I*a*b*c^2*d*f^2*e - 3*I*a*b*c*d^2*f*e^2 + I*a*b*d^3*e^3)*sqrt(-(a^2 - b^2)/a^2)*log(2*a*cos(f*x + e) + 2*I*a*sin(f*x + e) + 2*a*sqrt(-(a^2 - b^2)/a^2) + 2*b) - 2*(I*a*b*c^3*f^3 - 3*I*a*b*c^2*d*f^2*e + 3*I*a*b*c*d^2*f*e^2 - I*a*b*d^3*e^3)*sqrt(-(a^2 - b^2)/a^2)*log(2*a*cos(f*x + e) - 2*I*a*sin(f*x + e) + 2*a*sqrt(-(a^2 - b^2)/a^2) + 2*b) - 2*(-I*a*b*c^3*f^3 + 3*I*a*b*c^2*d*f^2*e - 3*I*a*b*c*d^2*f*e^2 + I*a*b*d^3*e^3)*sqrt(-(a^2 - b^2)/a^2)*log(-2*a*cos(f*x + e) + 2*I*a*sin(f*x + e) + 2*a*sqrt(-(a^2 - b^2)/a^2) - 2*b) - 2*(I*a*b*c^3*f^3 - 3*I*a*b*c^2*d*f^2*e + 3*I*a*b*c*d^2*f*e^2 - I*a*b*d^3*e^3)*sqrt(-(a^2 - b^2)/a^2)*log(-2*a*cos(f*x + e) - 2*I*a*sin(f*x + e) + 2*a*sqrt(-(a^2 - b^2)/a^2) - 2*b) - 2*(I*a*b*d^3*f^3*x^3 + 3*I*a*b*c*d^2*f^3*x^2 + 3*I*a*b*c^2*d*f^3*x + 3*I*a*b*c^2*d*f^2*e^2 - 3*I*a*b*c*d^2*f*e^2 + I*a*b*d^3*e^3)*sqrt(-(a^2 - b^2)/a^2)*log((b*cos(f*x + e) + I*b*sin(f*x + e)) + (a*cos(f*x + e) + I*a*sin(f*x + e))*sqrt(-(a^2 - b^2)/a^2) + a)/a - 2*(-I*a*b*d^3*f^3*x^3 - 3*I*a*b*c*d^2*f^3*x^2 - 3*I*a*b*c^2*d*f^3*x - 3*I*a*b*c^2*d*f^2*e^2 + 3*I*a*b*c*d^2*f*e^2 - I*a*b*d^3*e^3)*sqrt(-(a^2 - b^2)/a^2)*log((b*cos(f*x + e) + I*b*sin(f*x + e)) - (a*cos(f*x + e) + I*a*sin(f*x + e))*sqrt(-(a^2 - b^2)/a^2) + a)/a - 2*(-I*a*b*d^3*f^3*x^3 - 3*I*a*b*c*d^2*f^3*x^2 - 3*I*a*b*c^2*d*f^3*x - 3*I*a*b*c^2*d*f^2*e^2 + 3*I*a*b*c*d^2*f*e^2 - I*a*b*d^3*e^3)*sqrt(-(a^2 - b^2)/a^2)*log((b*cos(f*x + e) - I*b*sin(f*x + e)) + (a*cos(f*x + e) - I*a*sin(f*x + e))*sqrt(-(a^2 - b^2)/a^2) + a)/a - 2*(I*a*b*d^3*f^3*x^3 + 3*I*a*b*c*d^2*f^3*x^2 + 3*I*a*b*c^2*d*f^3*x + 3*I*a*b*c^2*d*f^2*e^2 - 3*I*a*b*c*d^2*f*e^2 + I*a*b*d^3*e^3)*sqrt(-(a^2 - b^2)/a^2)*log((b*cos(f*x + e) - I*b*sin(f*x + e)) - (a*cos(f*x + e) - I*a*sin(f*x + e))*sqrt(-(a^2 - b^2)/a^2) + a)
```

$$\begin{aligned}
& 3*I*a*b*c^2*d*f^2*e - 3*I*a*b*c*d^2*f*e^2 + I*a*b*d^3*e^3)*sqrt(-(a^2 - b^2) \\
& /a^2)*log((b*cos(f*x + e) - I*b*sin(f*x + e) - (a*cos(f*x + e) - I*a*sin(f \\
& *x + e)))*sqrt(-(a^2 - b^2)/a^2) + a)/a) + 12*(-I*a*b*d^3*f*x - I*a*b*c*d^2*f) \\
& *sqrt(-(a^2 - b^2)/a^2)*polylog(3, -(b*cos(f*x + e) + I*b*sin(f*x + e) + \\
& (a*cos(f*x + e) + I*a*sin(f*x + e)))*sqrt(-(a^2 - b^2)/a^2))/a) + 12*(I*a*b* \\
& d^3*f*x + I*a*b*c*d^2*f)*sqrt(-(a^2 - b^2)/a^2)*polylog(3, -(b*cos(f*x + e) \\
& + I*b*sin(f*x + e) - (a*cos(f*x + e) + I*a*sin(f*x + e)))*sqrt(-(a^2 - b^2) \\
& /a^2))/a) + 12*(I*a*b*d^3*f*x + I*a*b*c*d^2*f)*sqrt(-(a^2 - b^2)/a^2)*polylog(3, \\
& -(b*cos(f*x + e) - I*b*sin(f*x + e) + (a*cos(f*x + e) - I*a*sin(f*x + e)))*sqrt(\\
& -(a^2 - b^2)/a^2))/a) + 12*(-I*a*b*d^3*f*x - I*a*b*c*d^2*f)*sqrt(\\
& -(a^2 - b^2)/a^2)*polylog(3, -(b*cos(f*x + e) - I*b*sin(f*x + e) - (a*cos(f \\
& *x + e) - I*a*sin(f*x + e)))*sqrt(-(a^2 - b^2)/a^2))/a)) / ((a^3 - a*b^2)*f^4)
\end{aligned}$$
Sympy [F]

time = 0.00, size = 0, normalized size = 0.00

$$\int \frac{(c + dx)^3}{a + b \sec(e + fx)} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] integrate((d*x+c)**3/(a+b*sec(f*x+e)),x)

[Out] Integral((c + d*x)**3/(a + b*sec(e + f*x)), x)

Giac [F]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] integrate((d*x+c)^3/(a+b*sec(f*x+e)),x, algorithm="giac")

[Out] integrate((d*x + c)^3/(b*sec(f*x + e) + a), x)

Mupad [F]

time = 0.00, size = -1, normalized size = -0.00

$$\int \frac{(c + dx)^3}{a + \frac{b}{\cos(e + fx)}} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] int((c + d*x)^3/(a + b/cos(e + f*x)),x)

[Out] int((c + d*x)^3/(a + b/cos(e + f*x)), x)

$$3.35 \quad \int \frac{(c+dx)^2}{a+b \sec(e+fx)} dx$$

Optimal. Leaf size=394

$$\frac{(c+dx)^3}{3ad} + \frac{ib(c+dx)^2 \log \left(1 + \frac{ae^{i(e+fx)}}{b-\sqrt{-a^2+b^2}} \right)}{a\sqrt{-a^2+b^2}f} - \frac{ib(c+dx)^2 \log \left(1 + \frac{ae^{i(e+fx)}}{b+\sqrt{-a^2+b^2}} \right)}{a\sqrt{-a^2+b^2}f} + \frac{2bd(c+dx)\text{PolyLog}[2,-a \exp(I*(f*x+e))]}{a\sqrt{-a^2+b^2}}$$

[Out] $\frac{1}{3}*(d*x+c)^3/a/d+I*b*(d*x+c)^2*\ln(1+a*\exp(I*(f*x+e)))/(b-(-a^2+b^2)^(1/2)))$
 $/a/f/(-a^2+b^2)^(1/2)-I*b*(d*x+c)^2*\ln(1+a*\exp(I*(f*x+e)))/(b+(-a^2+b^2)^(1/2)))$
 $/a/f/(-a^2+b^2)^(1/2)+2*b*d*(d*x+c)*\text{polylog}(2,-a*\exp(I*(f*x+e)))/(b-(-a^2+b^2)^(1/2)))$
 $/a/f^2/(-a^2+b^2)^(1/2)-2*b*d*(d*x+c)*\text{polylog}(2,-a*\exp(I*(f*x+e)))/(b+(-a^2+b^2)^(1/2)))$
 $/a/f^2/(-a^2+b^2)^(1/2)+2*I*b*d^2*\text{polylog}(3,-a*\exp(I*(f*x+e)))/(b-(-a^2+b^2)^(1/2)))$
 $/a/f^3/(-a^2+b^2)^(1/2)-2*I*b*d^2*\text{polylog}(3,-a*\exp(I*(f*x+e)))/(b+(-a^2+b^2)^(1/2)))$
 $/a/f^3/(-a^2+b^2)^(1/2)$

Rubi [A]

time = 0.62, antiderivative size = 394, normalized size of antiderivative = 1.00, number of steps used = 12, number of rules used = 7, integrand size = 20, $\frac{\text{number of rules}}{\text{integrand size}} = 0.350$, Rules used = {4276, 3402, 2296, 2221, 2611, 2320, 6724}

$$\frac{2bd(c+dx)\text{Li}_2\left(\frac{-ae^{i(e+fx)}}{b-\sqrt{b^2-a^2}}\right)}{af^2\sqrt{b^2-a^2}} - \frac{2bd(c+dx)\text{Li}_2\left(\frac{-ae^{i(e+fx)}}{b+\sqrt{b^2-a^2}}\right)}{af^2\sqrt{b^2-a^2}} + \frac{ib(c+dx)^2 \log \left(1 + \frac{ae^{i(e+fx)}}{b-\sqrt{b^2-a^2}} \right)}{af\sqrt{b^2-a^2}} - \frac{ib(c+dx)^2 \log \left(1 + \frac{ae^{i(e+fx)}}{\sqrt{b^2-a^2}+b} \right)}{af\sqrt{b^2-a^2}} + \frac{2ibd^2\text{Li}_3\left(\frac{-ae^{i(e+fx)}}{b-\sqrt{b^2-a^2}}\right)}{af^3\sqrt{b^2-a^2}} - \frac{2ibd^2\text{Li}_3\left(\frac{-ae^{i(e+fx)}}{b+\sqrt{b^2-a^2}}\right)}{af^3\sqrt{b^2-a^2}} + \frac{(c+dx)^3}{3ad}$$

Antiderivative was successfully verified.

[In] Int[(c + d*x)^2/(a + b*Sec[e + f*x]), x]

[Out] $(c + d*x)^3/(3*a*d) + (I*b*(c + d*x)^2*\text{Log}[1 + (a*\text{E}^{\text{I}*(e + f*x)})]/(b - \text{Sqrt}[-a^2 + b^2]))/(a*\text{Sqrt}[-a^2 + b^2]*f) - (I*b*(c + d*x)^2*\text{Log}[1 + (a*\text{E}^{\text{I}*(e + f*x)})]/(b + \text{Sqrt}[-a^2 + b^2]))/(a*\text{Sqrt}[-a^2 + b^2]*f) + (2*b*d*(c + d*x)*\text{PolyLog}[2, -((a*\text{E}^{\text{I}*(e + f*x)})/(b - \text{Sqrt}[-a^2 + b^2]))]/(a*\text{Sqrt}[-a^2 + b^2]*f^2) - (2*b*d*(c + d*x)*\text{PolyLog}[2, -((a*\text{E}^{\text{I}*(e + f*x)})/(b + \text{Sqrt}[-a^2 + b^2]))]/(a*\text{Sqrt}[-a^2 + b^2]*f^2) + ((2*I)*b*d^2*\text{PolyLog}[3, -((a*\text{E}^{\text{I}*(e + f*x)})/(b - \text{Sqrt}[-a^2 + b^2]))]/(a*\text{Sqrt}[-a^2 + b^2]*f^3) - ((2*I)*b*d^2*\text{PolyLog}[3, -((a*\text{E}^{\text{I}*(e + f*x)})/(b + \text{Sqrt}[-a^2 + b^2]))]/(a*\text{Sqrt}[-a^2 + b^2]*f^3))$

Rule 2221

```
Int[((F_)^((g_.)*(e_.) + (f_.)*(x_.)))^(n_.)*((c_.) + (d_.)*(x_.))^(m_.))/((a_) + (b_.)*((F_)^((g_.)*(e_.) + (f_.)*(x_.)))^(n_.)), x_Symbol] := Simp[((c + d*x)^m/(b*f*g*n*Log[F]))*Log[1 + b*((F^(g*(e + f*x)))^n/a)], x] - Dist[d*(m/(b*f*g*n*Log[F])), Int[(c + d*x)^(m - 1)*Log[1 + b*((F^(g*(e + f*x)))^n/a)], x], x]; FreeQ[{F, a, b, c, d, e, f, g, n}, x] && IGtQ[m, 0]
```

Rule 2296

```

Int[((F_)^(u_)*((f_.) + (g_.)*(x_.))^(m_.))/((a_.) + (b_.)*(F_)^(u_) + (c_.)
*(F_)^(v_.)), x_Symbol] :> With[{q = Rt[b^2 - 4*a*c, 2]}, Dist[2*(c/q), Int[
(f + g*x)^m*(F^u/(b - q + 2*c*F^u)), x], x] - Dist[2*(c/q), Int[(f + g*x)^m
*(F^u/(b + q + 2*c*F^u)), x], x]] /; FreeQ[{F, a, b, c, f, g}, x] && EqQ[v,
2*u] && LinearQ[u, x] && NeQ[b^2 - 4*a*c, 0] && IGtQ[m, 0]

```

Rule 2320

```

Int[u_, x_Symbol] :> With[{v = FunctionOfExponential[u, x]}, Dist[v/D[v, x]
, Subst[Int[FunctionOfExponentialFunction[u, x]/x, x], x, v], x]] /; FunctionOfExponentialQ[u, x] && !MatchQ[u, (w_)*((a_.)*(v_)^(n_.))^m_] /; FreeQ[
{a, m, n}, x] && IntegerQ[m*n] && !MatchQ[u, E^((c_.)*(a_.) + (b_.)*x))*(F_)^v_ /; FreeQ[{a, b, c}, x] && InverseFunctionQ[F[x]]]

```

Rule 2611

```

Int[Log[1 + (e_.)*((F_)^((c_.)*(a_.) + (b_.)*(x_.))))^(n_.)]*((f_.) + (g_.)
*(x_.))^(m_.), x_Symbol] :> Simp[(-(f + g*x)^m)*(PolyLog[2, (-e)*(F^(c*(a +
b*x)))^n]/(b*c*n*Log[F])), x] + Dist[g*(m/(b*c*n*Log[F])), Int[(f + g*x)^m
- 1]*PolyLog[2, (-e)*(F^(c*(a + b*x)))^n], x], x] /; FreeQ[{F, a, b, c, e,
f, g, n}, x] && GtQ[m, 0]

```

Rule 3402

```

Int[((c_.) + (d_.)*(x_.))^m_)/((a_.) + (b_.)*sin[(e_.) + Pi*(k_.) + (f_.)*(x_.)]), x_Symbol] :> Dist[2, Int[(c + d*x)^m*E^(I*Pi*(k - 1/2))*E^(I*(e + f
*x))/(b + 2*a*E^(I*Pi*(k - 1/2))*E^(I*(e + f*x)) - b*E^(2*I*k*Pi)*E^(2*I*(e
+ f*x))), x], x] /; FreeQ[{a, b, c, d, e, f}, x] && IntegerQ[2*k] && NeQ[
a^2 - b^2, 0] && IGtQ[m, 0]

```

Rule 4276

```

Int[(csc[(e_.) + (f_.)*(x_.)]*(b_.) + (a_.))^n_)*((c_.) + (d_.)*(x_.))^m_], x_Symbol] :> Int[ExpandIntegrand[(c + d*x)^m, 1/(Sin[e + f*x]^n/(b + a*Si
n[e + f*x])^n)], x], x] /; FreeQ[{a, b, c, d, e, f}, x] && ILtQ[n, 0] && IGt
Q[m, 0]

```

Rule 6724

```

Int[PolyLog[n_, (c_.)*(a_.) + (b_.)*(x_.))^p_]/((d_.) + (e_.)*(x_.)), x_S
ymbol] :> Simp[PolyLog[n + 1, c*(a + b*x)^p]/(e*p), x] /; FreeQ[{a, b, c, d
, e, n, p}, x] && EqQ[b*d, a*e]

```

Rubi steps

$$\begin{aligned}
\int \frac{(c+dx)^2}{a+b \sec(e+fx)} dx &= \int \left(\frac{(c+dx)^2}{a} - \frac{b(c+dx)^2}{a(b+a \cos(e+fx))} \right) dx \\
&= \frac{(c+dx)^3}{3ad} - \frac{b \int \frac{(c+dx)^2}{b+a \cos(e+fx)} dx}{a} \\
&= \frac{(c+dx)^3}{3ad} - \frac{(2b) \int \frac{e^{i(e+fx)}(c+dx)^2}{a+2be^{i(e+fx)}+ae^{2i(e+fx)}} dx}{a} \\
&= \frac{(c+dx)^3}{3ad} - \frac{(2b) \int \frac{e^{i(e+fx)}(c+dx)^2}{2b-2\sqrt{-a^2+b^2}+2ae^{i(e+fx)}} dx}{\sqrt{-a^2+b^2}} + \frac{(2b) \int \frac{e^{i(e+fx)}(c+dx)^2}{2b+2\sqrt{-a^2+b^2}+2ae^{i(e+fx)}} dx}{\sqrt{-a^2+b^2}} \\
&= \frac{(c+dx)^3}{3ad} + \frac{ib(c+dx)^2 \log \left(1 + \frac{ae^{i(e+fx)}}{b-\sqrt{-a^2+b^2}} \right)}{a\sqrt{-a^2+b^2}f} - \frac{ib(c+dx)^2 \log \left(1 + \frac{ae^{i(e+fx)}}{b+\sqrt{-a^2+b^2}} \right)}{a\sqrt{-a^2+b^2}f} \\
&= \frac{(c+dx)^3}{3ad} + \frac{ib(c+dx)^2 \log \left(1 + \frac{ae^{i(e+fx)}}{b-\sqrt{-a^2+b^2}} \right)}{a\sqrt{-a^2+b^2}f} - \frac{ib(c+dx)^2 \log \left(1 + \frac{ae^{i(e+fx)}}{b+\sqrt{-a^2+b^2}} \right)}{a\sqrt{-a^2+b^2}f} \\
&= \frac{(c+dx)^3}{3ad} + \frac{ib(c+dx)^2 \log \left(1 + \frac{ae^{i(e+fx)}}{b-\sqrt{-a^2+b^2}} \right)}{a\sqrt{-a^2+b^2}f} - \frac{ib(c+dx)^2 \log \left(1 + \frac{ae^{i(e+fx)}}{b+\sqrt{-a^2+b^2}} \right)}{a\sqrt{-a^2+b^2}f}
\end{aligned}$$

Mathematica [A]

time = 0.74, size = 338, normalized size = 0.86

$$\frac{(b+a \cos(e+fx)) \left(x(3c^2+3cdx+d^2x^2) + \frac{\frac{2ib(-c+dx)^2 \log \left(1 + \frac{ae^{i(e+fx)}}{b-\sqrt{-a^2+b^2}} \right) - (c+dx)^2 \log \left(1 + \frac{ae^{i(e+fx)}}{b+\sqrt{-a^2+b^2}} \right) + 2i(-I)(i+d)x \operatorname{PolyLog} \left(2, \frac{ae^{i(e+fx)}}{b-\sqrt{-a^2+b^2}} \right) + i \operatorname{PolyLog} \left(2, \frac{ae^{i(e+fx)}}{b+\sqrt{-a^2+b^2}} \right) }{\sqrt{-a^2+b^2}f} \right) }{3a(a+b \sec(e+fx))} \sec(e+fx)$$

Antiderivative was successfully verified.

[In] `Integrate[(c + d*x)^2/(a + b*Sec[e + f*x]), x]`

[Out] `((b + a*Cos[e + f*x])*x*(3*c^2 + 3*c*d*x + d^2*x^2) + ((3*I)*b*((c + d*x)^2*Log[1 - (a*E^(I*(e + f*x)))/(-b + Sqrt[-a^2 + b^2])]) - (c + d*x)^2*Log[1 + (a*E^(I*(e + f*x)))/(b + Sqrt[-a^2 + b^2])] + (2*d*((-I)*f*(c + d*x)*PolyLog[2, (a*E^(I*(e + f*x)))/(-b + Sqrt[-a^2 + b^2])]) + d*PolyLog[3, (a*E^(I*(e + f*x)))/(-b + Sqrt[-a^2 + b^2])])/f^2 + ((2*I)*d*(f*(c + d*x)*PolyLog[2, -((a*E^(I*(e + f*x)))/(b + Sqrt[-a^2 + b^2]))]) + I*d*PolyLog[3, -((a*E^(I*(e + f*x)))/(b + Sqrt[-a^2 + b^2]))]]`

$I*(e + f*x))/((b + \sqrt{-a^2 + b^2}))/f^2)/(\sqrt{-a^2 + b^2}*f)*\text{Sec}[e + f*x]/(3*a*(a + b*\text{Sec}[e + f*x]))$

Maple [F]

time = 0.30, size = 0, normalized size = 0.00

$$\int \frac{(dx + c)^2}{a + b \sec(fx + e)} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\int ((d*x+c)^2/(a+b*\sec(f*x+e)), x)$
[Out] $\int ((d*x+c)^2/(a+b*\sec(f*x+e)), x)$

Maxima [F(-2)]

time = 0.00, size = 0, normalized size = 0.00

Exception raised: ValueError

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((d*x+c)^2/(a+b*\sec(f*x+e)), x, \text{algorithm}=\text{"maxima"})$
[Out] Exception raised: ValueError >> Computation failed since Maxima requested additional constraints; using the 'assume' command before evaluation *may* help (example of legal syntax is 'assume(4*a^2-4*b^2>0)', see 'assume?' for more de

Fricas [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 1681 vs. $2(352) = 704$.

time = 4.16, size = 1681, normalized size = 4.27

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((d*x+c)^2/(a+b*\sec(f*x+e)), x, \text{algorithm}=\text{"fricas"})$
[Out] $1/6*(2*(a^2 - b^2)*d^2*f^3*x^3 + 6*(a^2 - b^2)*c*d*f^3*x^2 + 6*(a^2 - b^2)*c^2*f^3*x - 6*I*a*b*d^2*sqrt(-(a^2 - b^2)/a^2)*\text{polylog}(3, -(b*\cos(f*x + e) + I*b*\sin(f*x + e)) + (a*\cos(f*x + e) + I*a*\sin(f*x + e)))*sqrt(-(a^2 - b^2)/a^2)/a + 6*I*a*b*d^2*sqrt(-(a^2 - b^2)/a^2)*\text{polylog}(3, -(b*\cos(f*x + e) + I*b*\sin(f*x + e) - (a*\cos(f*x + e) + I*a*\sin(f*x + e)))*sqrt(-(a^2 - b^2)/a^2)/a) + 6*I*a*b*d^2*sqrt(-(a^2 - b^2)/a^2)*\text{polylog}(3, -(b*\cos(f*x + e) - I*b*\sin(f*x + e) + (a*\cos(f*x + e) - I*a*\sin(f*x + e)))*sqrt(-(a^2 - b^2)/a^2)/a) - 6*I*a*b*d^2*sqrt(-(a^2 - b^2)/a^2)*\text{polylog}(3, -(b*\cos(f*x + e) - I*b*\sin(f*x + e) - (a*\cos(f*x + e) - I*a*\sin(f*x + e)))*sqrt(-(a^2 - b^2)/a^2)/a) - 6*(a*b*d^2*f*x + a*b*c*d*f)*sqrt(-(a^2 - b^2)/a^2)*\text{dilog}(-(b*\cos(f*x + e) - I*b*\sin(f*x + e)))*sqrt(-(a^2 - b^2)/a^2))$

$$\begin{aligned}
& x + e) + I*b*sin(f*x + e) + (a*cos(f*x + e) + I*a*sin(f*x + e))*sqrt(-(a^2 - b^2)/a^2 + a)/a + 1) + 6*(a*b*d^2*f*x + a*b*c*d*f)*sqrt(-(a^2 - b^2)/a^2) \\
& *dilog(-(b*cos(f*x + e) + I*b*sin(f*x + e) - (a*cos(f*x + e) + I*a*sin(f*x + e)))*sqrt(-(a^2 - b^2)/a^2) + a)/a + 1) - 6*(a*b*d^2*f*x + a*b*c*d*f)*sqrt(-(a^2 - b^2)/a^2)*dilog(-(b*cos(f*x + e) - I*b*sin(f*x + e) + (a*cos(f*x + e) - I*a*sin(f*x + e)))*sqrt(-(a^2 - b^2)/a^2) + a)/a + 1) + 6*(a*b*d^2*f*x + a*b*c*d*f)*sqrt(-(a^2 - b^2)/a^2)*dilog(-(b*cos(f*x + e) - I*b*sin(f*x + e) - (a*cos(f*x + e) - I*a*sin(f*x + e)))*sqrt(-(a^2 - b^2)/a^2) + a)/a + 1) + 3*(I*a*b*c^2*f^2 - 2*I*a*b*c*d*f*e + I*a*b*d^2*f^2)*sqrt(-(a^2 - b^2)/a^2)*log(2*a*cos(f*x + e) + 2*I*a*sin(f*x + e) + 2*a*sqrt(-(a^2 - b^2)/a^2) + 2*b) + 3*(-I*a*b*c^2*f^2 + 2*I*a*b*c*d*f*e - I*a*b*d^2*f^2)*sqrt(-(a^2 - b^2)/a^2)*log(2*a*cos(f*x + e) - 2*I*a*sin(f*x + e) + 2*a*sqrt(-(a^2 - b^2)/a^2) + 2*b) + 3*(I*a*b*c^2*f^2 - 2*I*a*b*c*d*f*e + I*a*b*d^2*f^2)*sqrt(-(a^2 - b^2)/a^2)*log(-2*a*cos(f*x + e) + 2*I*a*sin(f*x + e) + 2*a*sqrt(-(a^2 - b^2)/a^2) - 2*b) + 3*(-I*a*b*c^2*f^2 + 2*I*a*b*c*d*f*e - I*a*b*d^2*f^2)*sqrt(-(a^2 - b^2)/a^2)*log(-2*a*cos(f*x + e) - 2*I*a*sin(f*x + e) + 2*a*sqrt(-(a^2 - b^2)/a^2) - 2*b) + 3*(-I*a*b*d^2*f^2*x^2 - 2*I*a*b*c*d*f^2*x - 2*I*a*b*c*d*f^2*x^2 + I*a*b*d^2*f^2*x^2)*sqrt(-(a^2 - b^2)/a^2)*log((b*cos(f*x + e) + I*b*sin(f*x + e) + (a*cos(f*x + e) + I*a*sin(f*x + e)))*sqrt(-(a^2 - b^2)/a^2) + a) + 3*(I*a*b*d^2*f^2*x^2 + 2*I*a*b*c*d*f^2*x + 2*I*a*b*c*d*f^2*x^2 - I*a*b*d^2*f^2*x^2)*sqrt(-(a^2 - b^2)/a^2)*log((b*cos(f*x + e) + I*b*sin(f*x + e) - (a*cos(f*x + e) + I*a*sin(f*x + e)))*sqrt(-(a^2 - b^2)/a^2) + a)/a) + 3*(I*a*b*d^2*f^2*x^2 + 2*I*a*b*c*d*f^2*x + 2*I*a*b*c*d*f^2*x^2 - I*a*b*d^2*f^2*x^2)*sqrt(-(a^2 - b^2)/a^2)*log((b*cos(f*x + e) - I*b*sin(f*x + e) + (a*cos(f*x + e) - I*a*sin(f*x + e)))*sqrt(-(a^2 - b^2)/a^2) + a)/a) + 3*(-I*a*b*d^2*f^2*x^2 - 2*I*a*b*c*d*f^2*x - 2*I*a*b*c*d*f^2*x^2 + I*a*b*d^2*f^2*x^2)*sqrt(-(a^2 - b^2)/a^2)*log((b*cos(f*x + e) - I*b*sin(f*x + e) - (a*cos(f*x + e) - I*a*sin(f*x + e)))*sqrt(-(a^2 - b^2)/a^2) + a)/a))
\end{aligned}$$
Sympy [F]

time = 0.00, size = 0, normalized size = 0.00

$$\int \frac{(c + dx)^2}{a + b \sec(e + fx)} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] integrate((d*x+c)**2/(a+b*sec(f*x+e)),x)
[Out] Integral((c + d*x)**2/(a + b*sec(e + f*x)), x)

Giac [F]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate((d*x+c)^2/(a+b*sec(f*x+e)),x, algorithm="giac")`

[Out] `integrate((d*x + c)^2/(b*sec(f*x + e) + a), x)`

Mupad [F]

time = 0.00, size = -1, normalized size = -0.00

$$\int \frac{(c + d x)^2}{a + \frac{b}{\cos(e + f x)}} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] `int((c + d*x)^2/(a + b/cos(e + f*x)),x)`

[Out] `int((c + d*x)^2/(a + b/cos(e + f*x)), x)`

3.36 $\int \frac{c+dx}{a+b \sec(e+fx)} dx$

Optimal. Leaf size=257

$$\frac{(c+dx)^2}{2ad} + \frac{ib(c+dx) \log \left(1 + \frac{ae^{i(e+fx)}}{b-\sqrt{-a^2+b^2}} \right)}{a\sqrt{-a^2+b^2}f} - \frac{ib(c+dx) \log \left(1 + \frac{ae^{i(e+fx)}}{b+\sqrt{-a^2+b^2}} \right)}{a\sqrt{-a^2+b^2}f} + \frac{bd \text{PolyLog} \left(2, -\frac{ae^{i(e+fx)}}{b-\sqrt{-a^2+b^2}} \right)}{a\sqrt{-a^2+b^2}}$$

[Out] $1/2*(d*x+c)^2/a/d+I*b*(d*x+c)*\ln(1+a*\exp(I*(f*x+e))/(b-(-a^2+b^2)^(1/2)))/a$
 $/f/(-a^2+b^2)^(1/2)-I*b*(d*x+c)*\ln(1+a*\exp(I*(f*x+e))/(b+(-a^2+b^2)^(1/2)))$
 $/a/f/(-a^2+b^2)^(1/2)+b*d*\text{polylog}(2,-a*\exp(I*(f*x+e))/(b-(-a^2+b^2)^(1/2)))$
 $/a/f^2/(-a^2+b^2)^(1/2)-b*d*\text{polylog}(2,-a*\exp(I*(f*x+e))/(b+(-a^2+b^2)^(1/2)))$
 $)/a/f^2/(-a^2+b^2)^(1/2)$

Rubi [A]

time = 0.34, antiderivative size = 257, normalized size of antiderivative = 1.00, number of steps used = 10, number of rules used = 6, integrand size = 18, $\frac{\text{number of rules}}{\text{integrand size}} = 0.333$, Rules used = {4276, 3402, 2296, 2221, 2317, 2438}

$$\frac{ib(c+dx) \log \left(1 + \frac{ae^{i(e+fx)}}{b-\sqrt{b^2-a^2}} \right)}{af\sqrt{b^2-a^2}} - \frac{ib(c+dx) \log \left(1 + \frac{ae^{i(e+fx)}}{\sqrt{b^2-a^2}+b} \right)}{af\sqrt{b^2-a^2}} + \frac{bd \text{Li}_2 \left(-\frac{ae^{i(e+fx)}}{b-\sqrt{b^2-a^2}} \right)}{af^2\sqrt{b^2-a^2}} - \frac{bd \text{Li}_2 \left(-\frac{ae^{i(e+fx)}}{b+\sqrt{b^2-a^2}} \right)}{af^2\sqrt{b^2-a^2}} + \frac{(c+dx)^2}{2ad}$$

Antiderivative was successfully verified.

[In] $\text{Int}[(c+d*x)/(a+b*\text{Sec}[e+f*x]), x]$

[Out] $(c+d*x)^2/(2*a*d) + (I*b*(c+d*x)*\text{Log}[1+(a*E^(I*(e+f*x)))/(b-\text{Sqrt}[-a^2+b^2])])/(a*\text{Sqrt}[-a^2+b^2]*f) - (I*b*(c+d*x)*\text{Log}[1+(a*E^(I*(e+f*x)))/(b+\text{Sqrt}[-a^2+b^2])])/(a*\text{Sqrt}[-a^2+b^2]*f) + (b*d*\text{PolyLog}[2,-((a*E^(I*(e+f*x)))/(b-\text{Sqrt}[-a^2+b^2]))])/(a*\text{Sqrt}[-a^2+b^2]*f^2) - (b*d*\text{PolyLog}[2,-((a*E^(I*(e+f*x)))/(b+\text{Sqrt}[-a^2+b^2]))])/(a*\text{Sqrt}[-a^2+b^2]*f^2)$

Rule 2221

```
Int[((F_)^((g_.)*(e_.)+(f_.)*(x_.)))^(n_.)*((c_.)+(d_.)*(x_.))^(m_.))/((a_.)+(b_.)*(F_)^((g_.)*(e_.)+(f_.)*(x_.)))^(n_.)), x_Symbol] :> Simplify[((c+d*x)^m/(b*f*g*n*Log[F]))*Log[1+b*((F^(g*(e+f*x)))^n/a)], x] - Dist[d*(m/(b*f*g*n*Log[F])), Int[(c+d*x)^(m-1)*Log[1+b*((F^(g*(e+f*x)))^n/a)], x], x]; FreeQ[{F, a, b, c, d, e, f, g, n}, x] && IGtQ[m, 0]
```

Rule 2296

```
Int[((F_)^((u_.)*(f_.)+(g_.)*(x_.))^((m_.)))/((a_.)+(b_.)*(F_)^((u_.)+(c_.)*(F_)^((v_.))), x_Symbol) :> With[{q=Rt[b^2-4*a*c, 2]}, Dist[2*(c/q), Int[(f+g*x)^m*(F^u/(b-q+2*c*F^u)), x], x] - Dist[2*(c/q), Int[(f+g*x)^m*(F^u/(b+q+2*c*F^u)), x], x]] /; FreeQ[{F, a, b, c, f, g}, x] && EqQ[v,
```

```
2*u] && LinearQ[u, x] && NeQ[b^2 - 4*a*c, 0] && IGtQ[m, 0]
```

Rule 2317

```
Int[Log[(a_) + (b_)*((F_)^((e_.)*(c_.) + (d_)*(x_))))^(n_.)], x_Symbol]
: > Dist[1/(d*e*n*Log[F]), Subst[Int[Log[a + b*x]/x, x], x, (F^(e*(c + d*x)))^n], x] /; FreeQ[{F, a, b, c, d, e, n}, x] && GtQ[a, 0]
```

Rule 2438

```
Int[Log[(c_)*(d_) + (e_)*(x_)^(n_.))]/(x_), x_Symbol] :> Simp[-PolyLog[2, (-c)*e*x^n]/n, x] /; FreeQ[{c, d, e, n}, x] && EqQ[c*d, 1]
```

Rule 3402

```
Int[((c_.) + (d_)*(x_))^(m_.)/((a_) + (b_)*sin[(e_.) + Pi*(k_.) + (f_.)*(x_.)]), x_Symbol] :> Dist[2, Int[(c + d*x)^m*E^(I*Pi*(k - 1/2))*(E^(I*(e + f*x))/(b + 2*a*E^(I*Pi*(k - 1/2))*E^(I*(e + f*x)) - b*E^(2*I*k*Pi)*E^(2*I*(e + f*x))), x], x] /; FreeQ[{a, b, c, d, e, f}, x] && IntegerQ[2*k] && NeQ[a^2 - b^2, 0] && IGtQ[m, 0]
```

Rule 4276

```
Int[(csc[(e_.) + (f_)*(x_)]*(b_.) + (a_))^(n_.)*((c_.) + (d_)*(x_))^(m_.), x_Symbol] :> Int[ExpandIntegrand[(c + d*x)^m, 1/(Sin[e + f*x]^n/(b + a*Sin[e + f*x])^n), x], x] /; FreeQ[{a, b, c, d, e, f}, x] && ILtQ[n, 0] && IGtQ[m, 0]
```

Rubi steps

$$\begin{aligned}
\int \frac{c+dx}{a+b\sec(e+fx)} dx &= \int \left(\frac{c+dx}{a} - \frac{b(c+dx)}{a(b+a\cos(e+fx))} \right) dx \\
&= \frac{(c+dx)^2}{2ad} - \frac{b \int \frac{c+dx}{b+a\cos(e+fx)} dx}{a} \\
&= \frac{(c+dx)^2}{2ad} - \frac{(2b) \int \frac{e^{i(e+fx)}(c+dx)}{a+2be^{i(e+fx)}+ae^{2i(e+fx)}} dx}{a} \\
&= \frac{(c+dx)^2}{2ad} - \frac{(2b) \int \frac{e^{i(e+fx)}(c+dx)}{2b-2\sqrt{-a^2+b^2}+2ae^{i(e+fx)}} dx}{\sqrt{-a^2+b^2}} + \frac{(2b) \int \frac{e^{i(e+fx)}(c+dx)}{2b+2\sqrt{-a^2+b^2}+2ae^{i(e+fx)}} dx}{\sqrt{-a^2+b^2}} \\
&= \frac{(c+dx)^2}{2ad} + \frac{ib(c+dx) \log \left(1 + \frac{ae^{i(e+fx)}}{b-\sqrt{-a^2+b^2}} \right)}{a\sqrt{-a^2+b^2}f} - \frac{ib(c+dx) \log \left(1 + \frac{ae^{i(e+fx)}}{b+\sqrt{-a^2+b^2}} \right)}{a\sqrt{-a^2+b^2}f} \\
&= \frac{(c+dx)^2}{2ad} + \frac{ib(c+dx) \log \left(1 + \frac{ae^{i(e+fx)}}{b-\sqrt{-a^2+b^2}} \right)}{a\sqrt{-a^2+b^2}f} - \frac{ib(c+dx) \log \left(1 + \frac{ae^{i(e+fx)}}{b+\sqrt{-a^2+b^2}} \right)}{a\sqrt{-a^2+b^2}f} \\
&= \frac{(c+dx)^2}{2ad} + \frac{ib(c+dx) \log \left(1 + \frac{ae^{i(e+fx)}}{b-\sqrt{-a^2+b^2}} \right)}{a\sqrt{-a^2+b^2}f} - \frac{ib(c+dx) \log \left(1 + \frac{ae^{i(e+fx)}}{b+\sqrt{-a^2+b^2}} \right)}{a\sqrt{-a^2+b^2}f}
\end{aligned}$$

Mathematica [A]

time = 0.44, size = 214, normalized size = 0.83

$$\frac{f(\sqrt{-a^2+b^2}fx(2c+dx)+2ib(c+dx)\log\left(1-\frac{ae^{i(e+fx)}}{-b+\sqrt{-a^2+b^2}}\right)-2ib(c+dx)\log\left(1+\frac{ae^{i(e+fx)}}{b+\sqrt{-a^2+b^2}}\right))+2bd\text{PolyLog}\left(2,\frac{ae^{i(e+fx)}}{-b+\sqrt{-a^2+b^2}}\right)-2bd\text{PolyLog}\left(2,-\frac{ae^{i(e+fx)}}{b+\sqrt{-a^2+b^2}}\right)}{2a\sqrt{-a^2+b^2}f^2}$$

Antiderivative was successfully verified.

[In] `Integrate[(c + d*x)/(a + b*Sec[e + f*x]), x]`

[Out] `(f*(Sqrt[-a^2 + b^2]*f*x*(2*c + d*x) + (2*I)*b*(c + d*x)*Log[1 - (a*E^(I*(e + f*x)))/(-b + Sqrt[-a^2 + b^2])] - (2*I)*b*(c + d*x)*Log[1 + (a*E^(I*(e + f*x)))/(b + Sqrt[-a^2 + b^2])]) + 2*b*d*PolyLog[2, (a*E^(I*(e + f*x)))/(-b + Sqrt[-a^2 + b^2])] - 2*b*d*PolyLog[2, -(a*E^(I*(e + f*x)))/(b + Sqrt[-a^2 + b^2])])/((2*a*Sqrt[-a^2 + b^2])*f^2)`

Maple [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 515 vs. 2(229) = 458.

time = 0.58, size = 516, normalized size = 2.01

method	result
risch	$\frac{dx^2}{2a} + \frac{cx}{a} + \frac{2ibc \arctan\left(\frac{2ae^{i(fx+e)}+2b}{2\sqrt{a^2-b^2}}\right)}{af\sqrt{a^2-b^2}} + \frac{ibd \ln\left(\frac{-ae^{i(fx+e)}+\sqrt{-a^2+b^2}-b}{-b+\sqrt{-a^2+b^2}}\right)x}{af\sqrt{-a^2+b^2}} + \frac{ibd \ln\left(\frac{-ae^{i(fx+e)}+\sqrt{-a^2+b^2}}{-b+\sqrt{-a^2+b^2}}\right)}{af^2\sqrt{-a^2+b^2}}$

Verification of antiderivative is not currently implemented for this CAS.

```
[In] int((d*x+c)/(a+b*sec(f*x+e)),x,method=_RETURNVERBOSE)
[Out] 1/2*d/a*x^2+c/a*x+2*I*b/a/f*c/(a^2-b^2)^(1/2)*arctan(1/2*(2*a*exp(I*(f*x+e))+2*b)/(a^2-b^2)^(1/2))+I*b/a/f*d/(-a^2+b^2)^(1/2)*ln((-a*exp(I*(f*x+e))+(-a^2+b^2)^(1/2)-b)/(-b+(-a^2+b^2)^(1/2)))*x+I*b/a/f^2*d/(-a^2+b^2)^(1/2)*ln((-a*exp(I*(f*x+e))+(-a^2+b^2)^(1/2)-b)/(-b+(-a^2+b^2)^(1/2)))*e-I*b/a/f*d/(-a^2+b^2)^(1/2)*ln((a*exp(I*(f*x+e))+(-a^2+b^2)^(1/2)+b)/(b+(-a^2+b^2)^(1/2)))*x-I*b/a/f^2*d/(-a^2+b^2)^(1/2)*ln((a*exp(I*(f*x+e))+(-a^2+b^2)^(1/2)+b)/(b+(-a^2+b^2)^(1/2)))*e+b/a/f^2*d/(-a^2+b^2)^(1/2)*dilog((-a*exp(I*(f*x+e))+(-a^2+b^2)^(1/2)-b)/(-b+(-a^2+b^2)^(1/2)))-b/a/f^2*d/(-a^2+b^2)^(1/2)*dilog((a*exp(I*(f*x+e))+(-a^2+b^2)^(1/2)+b)/(b+(-a^2+b^2)^(1/2)))-2*I*b/a/f^2*d*e/(a^2-b^2)^(1/2)*arctan(1/2*(2*a*exp(I*(f*x+e))+2*b)/(a^2-b^2)^(1/2))
```

Maxima [F(-2)]

time = 0.00, size = 0, normalized size = 0.00

Exception raised: ValueError

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)/(a+b*sec(f*x+e)),x, algorithm="maxima")
[Out] Exception raised: ValueError >> Computation failed since Maxima requested additional constraints; using the 'assume' command before evaluation *may* help (example of legal syntax is 'assume(4*a^2-4*b^2>0)', see 'assume?' for more de
```

Fricas [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 1089 vs. $2(229) = 458$.

time = 4.05, size = 1089, normalized size = 4.24

~~.....~~

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)/(a+b*sec(f*x+e)),x, algorithm="fricas")
[Out] 1/2*((a^2 - b^2)*d*f^2*x^2 + 2*(a^2 - b^2)*c*f^2*x - a*b*d*sqrt(-(a^2 - b^2)/a^2)*dilog(-(b*cos(f*x + e) + I*b*sin(f*x + e) + (a*cos(f*x + e) + I*a*sin(f*x + e))*sqrt(-(a^2 - b^2)/a^2) + a)/a + 1) + a*b*d*sqrt(-(a^2 - b^2)/a^2)
```

$$\begin{aligned}
& 2*\text{dilog}(-(b*\cos(f*x + e) + I*b*\sin(f*x + e) - (\text{a}*\cos(f*x + e) + I*a*\sin(f*x + e)))*\sqrt{-(a^2 - b^2)/a^2} + a)/a + 1) - a*b*d*\sqrt{-(a^2 - b^2)/a^2}*\text{dilog}(-(b*\cos(f*x + e) - I*b*\sin(f*x + e) + (\text{a}*\cos(f*x + e) - I*a*\sin(f*x + e)))*\sqrt{-(a^2 - b^2)/a^2} + a)/a + 1) + a*b*d*\sqrt{-(a^2 - b^2)/a^2}*\text{dilog}(-(b*\cos(f*x + e) - I*b*\sin(f*x + e) - (\text{a}*\cos(f*x + e) - I*a*\sin(f*x + e)))*\sqrt{-(a^2 - b^2)/a^2} + a)/a + 1) - (-I*a*b*c*f + I*a*b*d*e)*\sqrt{-(a^2 - b^2)/a^2}*\log(2*a*\cos(f*x + e) + 2*I*a*\sin(f*x + e) + 2*a*\sqrt{-(a^2 - b^2)/a^2} + 2*b) - (I*a*b*c*f - I*a*b*d*e)*\sqrt{-(a^2 - b^2)/a^2}*\log(2*a*\cos(f*x + e) - 2*I*a*\sin(f*x + e) + 2*a*\sqrt{-(a^2 - b^2)/a^2} + 2*b) - (-I*a*b*c*f + I*a*b*d*e)*\sqrt{-(a^2 - b^2)/a^2}*\log(-2*a*\cos(f*x + e) + 2*I*a*\sin(f*x + e) + 2*a*\sqrt{-(a^2 - b^2)/a^2} - 2*b) - (I*a*b*c*f - I*a*b*d*e)*\sqrt{-(a^2 - b^2)/a^2}*\log(-2*a*\cos(f*x + e) - 2*I*a*\sin(f*x + e) + 2*a*\sqrt{-(a^2 - b^2)/a^2} - 2*b) - (I*a*b*d*f*x + I*a*b*d*e)*\sqrt{-(a^2 - b^2)/a^2}*\log((b*\cos(f*x + e) + I*b*\sin(f*x + e) + (\text{a}*\cos(f*x + e) + I*a*\sin(f*x + e)))*\sqrt{-(a^2 - b^2)/a^2} + a)/a) - (-I*a*b*d*f*x - I*a*b*d*e)*\sqrt{-(a^2 - b^2)/a^2}*\log((b*\cos(f*x + e) + I*b*\sin(f*x + e) - (\text{a}*\cos(f*x + e) + I*a*\sin(f*x + e)))*\sqrt{-(a^2 - b^2)/a^2} + a)/a) - (-I*a*b*d*f*x - I*a*b*d*e)*\sqrt{-(a^2 - b^2)/a^2}*\log((b*\cos(f*x + e) - I*b*\sin(f*x + e) + (\text{a}*\cos(f*x + e) - I*a*\sin(f*x + e)))*\sqrt{-(a^2 - b^2)/a^2} + a)/a) - (I*a*b*d*f*x + I*a*b*d*e)*\sqrt{-(a^2 - b^2)/a^2}*\log((b*\cos(f*x + e) - I*b*\sin(f*x + e) - (\text{a}*\cos(f*x + e) - I*a*\sin(f*x + e)))*\sqrt{-(a^2 - b^2)/a^2} + a)/a))/((a^3 - a*b^2)*f^2)
\end{aligned}$$
Sympy [F]

time = 0.00, size = 0, normalized size = 0.00

$$\int \frac{c + dx}{a + b \sec(e + fx)} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate((d*x+c)/(a+b*sec(f*x+e)),x)`[Out] `Integral((c + d*x)/(a + b*sec(e + f*x)), x)`**Giac [F]**

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate((d*x+c)/(a+b*sec(f*x+e)),x, algorithm="giac")`[Out] `integrate((d*x + c)/(b*sec(f*x + e) + a), x)`**Mupad [F]**

time = 0.00, size = -1, normalized size = -0.00

$$\int \frac{c + dx}{a + \frac{b}{\cos(e + fx)}} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{int}((c + d*x)/(a + b/\cos(e + f*x)), x)$

[Out] $\text{int}((c + d*x)/(a + b/\cos(e + f*x)), x)$

3.37 $\int \frac{1}{(c+dx)(a+b\sec(e+fx))} dx$

Optimal. Leaf size=23

$$\text{Int}\left(\frac{1}{(c+dx)(a+b\sec(e+fx))}, x\right)$$

[Out] Unintegrable(1/(d*x+c)/(a+b*sec(f*x+e)),x)

Rubi [A]

time = 0.04, antiderivative size = 0, normalized size of antiderivative = 0.00, number of steps used = 0, number of rules used = 0, integrand size = 0, $\frac{\text{number of rules}}{\text{integrand size}}$ = 0.000, Rules used = {}

$$\int \frac{1}{(c+dx)(a+b\sec(e+fx))} dx$$

Verification is not applicable to the result.

[In] Int[1/((c + d*x)*(a + b*Sec[e + f*x])),x]

[Out] Defer[Int][1/((c + d*x)*(a + b*Sec[e + f*x])), x]

Rubi steps

$$\int \frac{1}{(c+dx)(a+b\sec(e+fx))} dx = \int \frac{1}{(c+dx)(a+b\sec(e+fx))} dx$$

Mathematica [A]

time = 1.56, size = 0, normalized size = 0.00

$$\int \frac{1}{(c+dx)(a+b\sec(e+fx))} dx$$

Verification is not applicable to the result.

[In] Integrate[1/((c + d*x)*(a + b*Sec[e + f*x])),x]

[Out] Integrate[1/((c + d*x)*(a + b*Sec[e + f*x])), x]

Maple [A]

time = 0.24, size = 0, normalized size = 0.00

$$\int \frac{1}{(dx+c)(a+b\sec(fx+e))} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\int \frac{1}{(d*x+c)/(a+b*\sec(f*x+e))} dx$
[Out] $\int \frac{1}{(d*x+c)/(a+b*\sec(f*x+e))} dx$

Maxima [A]

time = 0.00, size = 0, normalized size = 0.00

Failed to integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}(1/(d*x+c)/(a+b*\sec(f*x+e)), x, \text{algorithm}=\text{"maxima"})$
[Out] $-\frac{(2*a*b*d*\text{integrate}((a*\cos(2*f*x + 2*e)*\cos(f*x + e) + 2*b*\cos(f*x + e)^2 + a*\sin(2*f*x + 2*e)*\sin(f*x + e) + 2*b*\sin(f*x + e)^2 + a*\cos(f*x + e))/(a^3*d*x + a^3*c + (a^3*d*x + a^3*c)*\cos(2*f*x + 2*e)^2 + 4*(a*b^2*d*x + a*b^2*c)*\cos(f*x + e)^2 + (a^3*d*x + a^3*c)*\sin(2*f*x + 2*e)^2 + 4*(a^2*b*d*x + a^2*b*c)*\sin(f*x + e)^2 + 2*(a^3*d*x + a^3*c + 2*(a^2*b*d*x + a^2*b*c)*\cos(f*x + e))*\cos(2*f*x + 2*e) + 4*(a^2*b*d*x + a^2*b*c)*\cos(f*x + e)), x) - \log(d*x + c))/(a*d)$

Fricas [A]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}(1/(d*x+c)/(a+b*\sec(f*x+e)), x, \text{algorithm}=\text{"fricas"})$

[Out] $\text{integral}(1/(a*d*x + a*c + (b*d*x + b*c)*\sec(f*x + e)), x)$

Sympy [A]

time = 0.00, size = 0, normalized size = 0.00

$$\int \frac{1}{(a + b \sec(e + fx))(c + dx)} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}(1/(d*x+c)/(a+b*\sec(f*x+e)), x)$

[Out] $\text{Integral}(1/((a + b*\sec(e + fx))*(c + d*x)), x)$

Giac [A]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate(1/(d*x+c)/(a+b*sec(f*x+e)),x, algorithm="giac")`

[Out] `integrate(1/((d*x + c)*(b*sec(f*x + e) + a)), x)`

Mupad [A]

time = 0.00, size = -1, normalized size = -0.04

$$\int \frac{1}{\left(a + \frac{b}{\cos(e+fx)}\right) (c + dx)} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] `int(1/((a + b/cos(e + f*x))*(c + d*x)),x)`

[Out] `int(1/((a + b/cos(e + f*x))*(c + d*x)), x)`

3.38 $\int \frac{1}{(c+dx)^2(a+b\sec(e+fx))} dx$

Optimal. Leaf size=23

$$\text{Int}\left(\frac{1}{(c+dx)^2(a+b\sec(e+fx))}, x\right)$$

[Out] Unintegrable(1/(d*x+c)^2/(a+b*sec(f*x+e)),x)

Rubi [A]

time = 0.04, antiderivative size = 0, normalized size of antiderivative = 0.00, number of steps used = 0, number of rules used = 0, integrand size = 0, $\frac{\text{number of rules}}{\text{integrand size}} = 0.000$, Rules used = {}

$$\int \frac{1}{(c+dx)^2(a+b\sec(e+fx))} dx$$

Verification is not applicable to the result.

[In] Int[1/((c + d*x)^2*(a + b*Sec[e + f*x])),x]

[Out] Defer[Int][1/((c + d*x)^2*(a + b*Sec[e + f*x])), x]

Rubi steps

$$\int \frac{1}{(c+dx)^2(a+b\sec(e+fx))} dx = \int \frac{1}{(c+dx)^2(a+b\sec(e+fx))} dx$$

Mathematica [A]

time = 10.36, size = 0, normalized size = 0.00

$$\int \frac{1}{(c+dx)^2(a+b\sec(e+fx))} dx$$

Verification is not applicable to the result.

[In] Integrate[1/((c + d*x)^2*(a + b*Sec[e + f*x])),x]

[Out] Integrate[1/((c + d*x)^2*(a + b*Sec[e + f*x])), x]

Maple [A]

time = 0.25, size = 0, normalized size = 0.00

$$\int \frac{1}{(dx+c)^2(a+b\sec(fx+e))} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\int \frac{1}{(dx+c)^2(a+b\sec(fx+e))} dx$

[Out] $\int \frac{1}{(dx+c)^2(a+b\sec(fx+e))} dx$

Maxima [A]

time = 0.00, size = 0, normalized size = 0.00

Failed to integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}(1/(dx+c)^2(a+b\sec(fx+e)), x, \text{algorithm}=\text{"maxima"})$

[Out]
$$\begin{aligned} & -\frac{(2*(a*b*d^2*x + a*b*c*d)*\text{integrate}((a*\cos(2*f*x + 2*e)*\cos(f*x + e) + 2*b*\cos(f*x + e)^2 + a*\sin(2*f*x + 2*e)*\sin(f*x + e) + 2*b*\sin(f*x + e)^2 + a*c*\os(f*x + e))/(a^3*d^2*x^2 + 2*a^3*c*d*x + a^3*c^2 + (a^3*d^2*x^2 + 2*a^3*c*d*x + a^3*c^2)*\cos(2*f*x + 2*e)^2 + 4*(a*b^2*d^2*x^2 + 2*a*b^2*c*d*x + a*b^2*c^2)*\cos(f*x + e)^2 + (a^3*d^2*x^2 + 2*a^3*c*d*x + a^3*c^2)*\sin(2*f*x + 2*e)^2 + 4*(a^2*b*d^2*x^2 + 2*a^2*b*c*d*x + a^2*b*c^2)*\sin(2*f*x + 2*e)*\sin(f*x + e) + 4*(a*b^2*d^2*x^2 + 2*a*b^2*c*d*x + a*b^2*c^2)*\sin(f*x + e)^2 + 2*(a^3*d^2*x^2 + 2*a^3*c*d*x + a^3*c^2 + 2*(a^2*b*d^2*x^2 + 2*a^2*b*c*d*x + a^2*b*c^2)*\cos(f*x + e))*\cos(2*f*x + 2*e) + 4*(a^2*b*d^2*x^2 + 2*a^2*b*c*d*x + a^2*b*c^2)*\cos(f*x + e)), x) + 1)/(a*d^2*x + a*c*d) \end{aligned}$$

Fricas [A]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}(1/(dx+c)^2(a+b\sec(fx+e)), x, \text{algorithm}=\text{"fricas"})$

[Out] $\text{integral}(1/(a*d^2*x^2 + 2*a*c*d*x + a*c^2 + (b*d^2*x^2 + 2*b*c*d*x + b*c^2)*\sec(f*x + e)), x)$

Sympy [A]

time = 0.00, size = 0, normalized size = 0.00

$$\int \frac{1}{(a + b \sec(e + fx))(c + dx)^2} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}(1/(dx+c)^2(a+b\sec(fx+e)), x)$

[Out] $\text{Integral}(1/((a + b*\sec(e + fx))*(c + d*x)^2), x)$

Giac [A]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate(1/(d*x+c)^2/(a+b*sec(f*x+e)),x, algorithm="giac")`

[Out] `integrate(1/((d*x + c)^2*(b*sec(f*x + e) + a)), x)`

Mupad [A]

time = 0.00, size = -1, normalized size = -0.04

$$\int \frac{1}{\left(a + \frac{b}{\cos(e+fx)}\right) (c + dx)^2} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] `int(1/((a + b/cos(e + f*x))*(c + d*x)^2),x)`

[Out] `int(1/((a + b/cos(e + f*x))*(c + d*x)^2), x)`

$$3.39 \quad \int \frac{(c+dx)^3}{(a+b \sec(e+fx))^2} dx$$

Optimal. Leaf size=1523

$$-\frac{ib^2(c+dx)^3}{a^2(a^2-b^2)f} + \frac{(c+dx)^4}{4a^2d} + \frac{3b^2d(c+dx)^2 \log\left(1 + \frac{ae^{i(e+fx)}}{b-i\sqrt{a^2-b^2}}\right)}{a^2(a^2-b^2)f^2} + \frac{3b^2d(c+dx)^2 \log\left(1 + \frac{ae^{i(e+fx)}}{b+i\sqrt{a^2-b^2}}\right)}{a^2(a^2-b^2)f^2}$$

[Out] $6*b*d*(d*x+c)^2*\text{polylog}(2, -a*\exp(I*(f*x+e))/(b-(-a^2+b^2)^(1/2)))/a^2/f^2/(-a^2+b^2)^(1/2)-6*b*d*(d*x+c)^2*\text{polylog}(2, -a*\exp(I*(f*x+e))/(b+(-a^2+b^2)^(1/2)))/a^2/f^2/(-a^2+b^2)^(1/2)-I*b^3*(d*x+c)^3*\ln(1+a*\exp(I*(f*x+e))/(b-(-a^2+b^2)^(1/2)))/a^2/(-a^2+b^2)^(3/2)/f-2*I*b*(d*x+c)^3*\ln(1+a*\exp(I*(f*x+e))/(b+(-a^2+b^2)^(1/2)))/a^2/f/(-a^2+b^2)^(1/2)+3*b^2*d*(d*x+c)^2*\ln(1+a*\exp(I*(f*x+e))/(b-I*(a^2-b^2)^(1/2)))/a^2/(a^2-b^2)/f^2+3*b^2*d*(d*x+c)^2*\ln(1+a*\exp(I*(f*x+e))/(b+I*(a^2-b^2)^(1/2)))/a^2/(a^2-b^2)/f^2+I*b^3*(d*x+c)^3*\ln(1+a*\exp(I*(f*x+e))/(b+(-a^2+b^2)^(1/2)))/a^2/(-a^2+b^2)^(3/2)/f-3*b^3*d*(d*x+c)^2*\text{polylog}(2, -a*\exp(I*(f*x+e))/(b-(-a^2+b^2)^(1/2)))/a^2/(-a^2+b^2)^(3/2)/f^2+3*b^3*d*(d*x+c)^2*\text{polylog}(2, -a*\exp(I*(f*x+e))/(b+(-a^2+b^2)^(1/2)))/a^2/(-a^2+b^2)^(3/2)/f^2+2*I*b*(d*x+c)^3*\ln(1+a*\exp(I*(f*x+e))/(b-(-a^2+b^2)^(1/2)))/a^2/(-a^2+b^2)^(3/2)/f^2+I*b^2*(d*x+c)^3/a^2/(a^2-b^2)/f-6*I*b^3*d^2*(d*x+c)*\text{polylog}(3, -a*\exp(I*(f*x+e))/(b-(-a^2+b^2)^(1/2)))/a^2/(-a^2+b^2)^(3/2)/f^3-12*I*b*d^2*(d*x+c)*\text{polylog}(3, -a*\exp(I*(f*x+e))/(b+(-a^2+b^2)^(1/2)))/a^2/f^3/(-a^2+b^2)^(1/2)+6*I*b^3*d^2*(d*x+c)*\text{polylog}(3, -a*\exp(I*(f*x+e))/(b+(-a^2+b^2)^(1/2)))/a^2/(-a^2+b^2)^(3/2)/f^3+12*I*b*d^2*(d*x+c)*\text{polylog}(3, -a*\exp(I*(f*x+e))/(b-(-a^2+b^2)^(1/2)))/a^2/(-a^2+b^2)^(3/2)/f^3-6*I*b^2*d^2*(d*x+c)*\text{polylog}(2, -a*\exp(I*(f*x+e))/(b-I*(a^2-b^2)^(1/2)))/a^2/(a^2-b^2)/f^3-6*I*b^2*d^2*(d*x+c)*\text{polylog}(2, -a*\exp(I*(f*x+e))/(b+I*(a^2-b^2)^(1/2)))/a^2/(a^2-b^2)/f^3+3*b^2*(d*x+c)^3*\sin(f*x+e)/a/(a^2-b^2)/f/(b+a*\cos(f*x+e))+1/4*(d*x+c)^4/a^2/d+6*b^2*d^3*\text{polylog}(3, -a*\exp(I*(f*x+e))/(b-I*(a^2-b^2)^(1/2)))/a^2/(a^2-b^2)/f^4+6*b^2*d^3*\text{polylog}(3, -a*\exp(I*(f*x+e))/(b+I*(a^2-b^2)^(1/2)))/a^2/(a^2-b^2)/f^4+6*b^3*d^3*\text{polylog}(4, -a*\exp(I*(f*x+e))/(b-(-a^2+b^2)^(1/2)))/a^2/(-a^2+b^2)^(3/2)/f^4-6*b^3*d^3*\text{polylog}(4, -a*\exp(I*(f*x+e))/(b+(-a^2+b^2)^(1/2)))/a^2/(-a^2+b^2)^(3/2)/f^4-12*b*d^3*\text{polylog}(4, -a*\exp(I*(f*x+e))/(b-(-a^2+b^2)^(1/2)))/a^2/f^4/(-a^2+b^2)^(1/2)+12*b*d^3*\text{polylog}(4, -a*\exp(I*(f*x+e))/(b+(-a^2+b^2)^(1/2)))/a^2/f^4/(-a^2+b^2)^(1/2)$

Rubi [A]

time = 2.05, antiderivative size = 1523, normalized size of antiderivative = 1.00, number of steps used = 36, number of rules used = 10, integrand size = 20, $\frac{\text{number of rules}}{\text{integrand size}}$ = 0.500, Rules used = {4276, 3405, 3402, 2296, 2221, 2611, 6744, 2320, 6724, 4618}

<http://www.apmaths.uwaterloo.ca/~bce/Rubi/4618.html>

Antiderivative was successfully verified.

[In] $\text{Int}[(c + d*x)^3/(a + b*\text{Sec}[e + f*x])^2, x]$

[Out]
$$\begin{aligned} & ((-I)*b^2*(c + d*x)^3)/(a^2*(a^2 - b^2)*f) + (c + d*x)^4/(4*a^2*d) + (3*b^2 \\ & *d*(c + d*x)^2*\text{Log}[1 + (a*E^{(I*(e + f*x))})/(b - I*\text{Sqrt}[a^2 - b^2])])/(a^2*(\\ & a^2 - b^2)*f^2) + (3*b^2*d*(c + d*x)^2*\text{Log}[1 + (a*E^{(I*(e + f*x))})/(b + I*\text{S} \\ & \text{qrt}[a^2 - b^2])])/(a^2*(a^2 - b^2)*f^2) - (I*b^3*(c + d*x)^3*\text{Log}[1 + (a*E^{(\\ & I*(e + f*x))})/(b - \text{Sqrt}[-a^2 + b^2])])/(a^2*(-a^2 + b^2)^{(3/2)*f}) + ((2*I)* \\ & b*(c + d*x)^3*\text{Log}[1 + (a*E^{(I*(e + f*x))})/(b - \text{Sqrt}[-a^2 + b^2])])/(a^2*\text{Sqr} \\ & t[-a^2 + b^2]*f) + (I*b^3*(c + d*x)^3*\text{Log}[1 + (a*E^{(I*(e + f*x))})/(b + \text{Sqrt} \\ & [-a^2 + b^2])])/(a^2*(-a^2 + b^2)^{(3/2)*f}) - ((2*I)*b*(c + d*x)^3*\text{Log}[1 + (\\ & a*E^{(I*(e + f*x))})/(b + \text{Sqrt}[-a^2 + b^2])])/(a^2*\text{Sqrt}[-a^2 + b^2]*f) - ((6*I) \\ & *b^2*d^2*(c + d*x)*\text{PolyLog}[2, -((a*E^{(I*(e + f*x))})/(b - I*\text{Sqrt}[a^2 - b^2])])/(a^2*(a^2 - b^2)*f^3) - ((6*I)*b^2*d^2*(c + d*x)*\text{PolyLog}[2, -((a*E^{(I \\ & *(e + f*x))})/(b + I*\text{Sqrt}[a^2 - b^2]))]/(a^2*(a^2 - b^2)*f^3) - (3*b^3*d*(c \\ & + d*x)^2*\text{PolyLog}[2, -((a*E^{(I*(e + f*x))})/(b - \text{Sqrt}[-a^2 + b^2]))]/(a^2*(\\ & -a^2 + b^2)^{(3/2)*f^2}) + (6*b*d*(c + d*x)^2*\text{PolyLog}[2, -((a*E^{(I*(e + f*x))}) \\ & /(b - \text{Sqrt}[-a^2 + b^2]))]/(a^2*\text{Sqrt}[-a^2 + b^2]*f^2) + (3*b^3*d*(c + d*x) \\ & ^2*\text{PolyLog}[2, -((a*E^{(I*(e + f*x))})/(b + \text{Sqrt}[-a^2 + b^2]))]/(a^2*(-a^2 + \\ & b^2)^{(3/2)*f^2}) - (6*b*d*(c + d*x)^2*\text{PolyLog}[2, -((a*E^{(I*(e + f*x))})/(b + \\ & \text{Sqrt}[-a^2 + b^2]))]/(a^2*\text{Sqrt}[-a^2 + b^2]*f^2) + (6*b^2*d^3*\text{PolyLog}[3, -((\\ & a*E^{(I*(e + f*x))})/(b - I*\text{Sqrt}[a^2 - b^2]))]/(a^2*(a^2 - b^2)*f^4) + (6*b^ \\ & 2*d^3*\text{PolyLog}[3, -((a*E^{(I*(e + f*x))})/(b + I*\text{Sqrt}[a^2 - b^2]))]/(a^2*(a^2 \\ & - b^2)*f^4) - ((6*I)*b^3*d^2*(c + d*x)*\text{PolyLog}[3, -((a*E^{(I*(e + f*x))})/(b \\ & - \text{Sqrt}[-a^2 + b^2]))]/(a^2*(-a^2 + b^2)^{(3/2)*f^3}) + ((12*I)*b*d^2*(c + d \\ & *x)*\text{PolyLog}[3, -((a*E^{(I*(e + f*x))})/(b - \text{Sqrt}[-a^2 + b^2]))]/(a^2*(a^2 - b^2)*f^3) - ((12*I)*b*d^2*(c + d*x)*\text{PolyLog}[3, -((a*E^{(I*(e + f*x))})/(b + \text{Sqrt}[-a^2 + b^2]))]/(a^2*\text{Sqr} \\ & t[-a^2 + b^2]*f^3) + ((6*I)*b^3*d^2*(c + d*x)*\text{PolyLog}[3, -((a*E^{(I*(e + f*x))})/(b + \text{Sqr} \\ & t[-a^2 + b^2]))]/(a^2*(-a^2 + b^2)^{(3/2)*f^3}) - (12*b*d^3*\text{PolyLog}[4, -((a*E^{(I \\ & *(e + f*x))})/(b - \text{Sqrt}[-a^2 + b^2]))]/(a^2*\text{Sqrt}[-a^2 + b^2]*f^4) - (6*b^3* \\ & d^3*\text{PolyLog}[4, -((a*E^{(I*(e + f*x))})/(b + \text{Sqrt}[-a^2 + b^2]))]/(a^2*(-a^2 + \\ & b^2)^{(3/2)*f^4}) + (12*b*d^3*\text{PolyLog}[4, -((a*E^{(I*(e + f*x))})/(b + \text{Sqr} \\ & t[-a^2 + b^2]))]/(a^2*\text{Sqrt}[-a^2 + b^2]*f^4) + (b^2*(c + d*x)^3*\text{Sin}[e + f*x])/(a \\ & *(a^2 - b^2)*f*(b + a*\text{Cos}[e + f*x])) \end{aligned}$$

Rule 2221

```
Int[((F_)^((g_.)*(e_.) + (f_.)*(x_.)))^(n_.)*(c_.) + (d_.)*(x_.)^(m_.))/((a_) + (b_.)*(F_)^((g_.)*(e_.) + (f_.)*(x_.)))^(n_.)), x_Symbol] :> Simp[((c + d*x)^m/(b*f*g*n*\text{Log}[F]))*\text{Log}[1 + b*((F^(g*(e + f*x)))^n/a)], x] - Difst[d*(m/(b*f*g*n*\text{Log}[F])), Int[(c + d*x)^(m - 1)*\text{Log}[1 + b*((F^(g*(e + f*x)))^n/a)], x], x] /; FreeQ[{F, a, b, c, d, e, f, g, n}, x] && IGtQ[m, 0]
```

Rule 2296

```
Int[((F_)^((u_.)*(f_.) + (g_.)*(x_.)))^(m_.))/((a_.) + (b_.)*(F_)^(u_.) + (c_.)
```

```
*(F_)^(v_), x_Symbol] :> With[{q = Rt[b^2 - 4*a*c, 2]}, Dist[2*(c/q), Int[(f + g*x)^m*(F^u/(b - q + 2*c*F^u)), x], x] - Dist[2*(c/q), Int[(f + g*x)^m*(F^u/(b + q + 2*c*F^u)), x], x]] /; FreeQ[{F, a, b, c, f, g}, x] && EqQ[v, 2*u] && LinearQ[u, x] && NeQ[b^2 - 4*a*c, 0] && IGtQ[m, 0]
```

Rule 2320

```
Int[u_, x_Symbol] :> With[{v = FunctionOfExponential[u, x]}, Dist[v/D[v, x], Subst[Int[FunctionOfExponentialFunction[u, x]/x, x], x, v], x]] /; FunctionOfExponentialQ[u, x] && !MatchQ[u, (w_)*((a_.)*(v_)^(n_.))^(m_.)] /; FreeQ[{a, m, n}, x] && IntegerQ[m*n] && !MatchQ[u, E^((c_.)*((a_.) + (b_.)*x))*(F_)[v_]] /; FreeQ[{a, b, c}, x] && InverseFunctionQ[F[x]]]
```

Rule 2611

```
Int[Log[1 + (e_)*((F_)^((c_.)*(a_.) + (b_.)*(x_))))^(n_.)]*((f_.) + (g_.)*(x_.))^m_., x_Symbol] :> Simp[(-(f + g*x)^m)*(PolyLog[2, (-e)*(F^(c*(a + b*x)))^n]/(b*c*n*Log[F])), x] + Dist[g*(m/(b*c*n*Log[F])), Int[(f + g*x)^(m - 1)*PolyLog[2, (-e)*(F^(c*(a + b*x)))^n], x], x] /; FreeQ[{F, a, b, c, e, f, g, n}, x] && GtQ[m, 0]
```

Rule 3402

```
Int[((c_.) + (d_.)*(x_))^(m_.)/((a_) + (b_.)*sin[(e_.) + Pi*(k_.) + (f_.)*(x_)]), x_Symbol] :> Dist[2, Int[(c + d*x)^m*E^(I*Pi*(k - 1/2))*(E^(I*(e + f*x))/(b + 2*a*E^(I*Pi*(k - 1/2))*E^(I*(e + f*x)) - b*E^(2*I*k*Pi)*E^(2*I*(e + f*x))), x], x] /; FreeQ[{a, b, c, d, e, f}, x] && IntegerQ[2*k] && NeQ[a^2 - b^2, 0] && IGtQ[m, 0]
```

Rule 3405

```
Int[((c_.) + (d_.)*(x_))^(m_.)/((a_) + (b_.)*sin[(e_.) + (f_.)*(x_)])^2, x_Symbol] :> Simp[b*(c + d*x)^m*(Cos[e + f*x]/(f*(a^2 - b^2)*(a + b*Sin[e + f*x]))), x] + (Dist[a/(a^2 - b^2), Int[(c + d*x)^m/(a + b*Sin[e + f*x]), x], x] - Dist[b*d*(m/(f*(a^2 - b^2))), Int[(c + d*x)^(m - 1)*(Cos[e + f*x]/(a + b*Sin[e + f*x])), x], x]) /; FreeQ[{a, b, c, d, e, f}, x] && NeQ[a^2 - b^2, 0] && IGtQ[m, 0]
```

Rule 4276

```
Int[(csc[(e_.) + (f_.)*(x_)]*(b_.) + (a_.))^(n_.)*((c_.) + (d_.)*(x_))^(m_.), x_Symbol] :> Int[ExpandIntegrand[(c + d*x)^m, 1/(Sin[e + f*x]^n/(b + a*Sin[e + f*x])^n)], x], x] /; FreeQ[{a, b, c, d, e, f}, x] && ILtQ[n, 0] && IGtQ[m, 0]
```

Rule 4618

```
Int[((e_.) + (f_.)*(x_))^m_.*Sin[(c_.) + (d_.)*(x_)])/(Cos[(c_.) + (d_.)*(x_)]*(b_.) + (a_)), x_Symbol] :> Simp[I*((e + f*x)^m/(b*f*(m + 1)))*x] + (Int[(e + f*x)^m*(E^(I*(c + d*x))/(I*a - Rt[-a^2 + b^2, 2] + I*b*E^(I*(c + d*x)))), x] + Int[(e + f*x)^m*(E^(I*(c + d*x))/(I*a + Rt[-a^2 + b^2, 2] + I*b*E^(I*(c + d*x)))), x]) /; FreeQ[{a, b, c, d, e, f}, x] && IGtQ[m, 0] && NegQ[a^2 - b^2]
```

Rule 6724

```
Int[PolyLog[n_, (c_.)*((a_.) + (b_.)*(x_))^p_)]/((d_.) + (e_.)*(x_)), x_Symbol] :> Simp[PolyLog[n + 1, c*(a + b*x)^p]/(e*p), x] /; FreeQ[{a, b, c, d, e, n, p}, x] && EqQ[b*d, a*e]
```

Rule 6744

```
Int[((e_.) + (f_.*x)^m_.*PolyLog[n_, (d_.)*((F_)^((c_.)*((a_.) + (b_._)*(x_))))^p_]), x_Symbol] :> Simp[(e + f*x)^m*(PolyLog[n + 1, d*(F^(c*(a + b*x)))^p]/(b*c*p*Log[F])), x] - Dist[f*(m/(b*c*p*Log[F])), Int[(e + f*x)^(m - 1)*PolyLog[n + 1, d*(F^(c*(a + b*x)))^p], x], x] /; FreeQ[{F, a, b, c, d, e, f, n, p}, x] && GtQ[m, 0]
```

Rubi steps

$$\begin{aligned}
\int \frac{(c+dx)^3}{(a+b \sec(e+fx))^2} dx &= \int \left(\frac{(c+dx)^3}{a^2} + \frac{b^2(c+dx)^3}{a^2(b+a \cos(e+fx))^2} - \frac{2b(c+dx)^3}{a^2(b+a \cos(e+fx))} \right) dx \\
&= \frac{(c+dx)^4}{4a^2d} - \frac{(2b) \int \frac{(c+dx)^3}{b+a \cos(e+fx)} dx}{a^2} + \frac{b^2 \int \frac{(c+dx)^3}{(b+a \cos(e+fx))^2} dx}{a^2} \\
&= \frac{(c+dx)^4}{4a^2d} + \frac{b^2(c+dx)^3 \sin(e+fx)}{a(a^2-b^2)f(b+a \cos(e+fx))} - \frac{(4b) \int \frac{e^{i(e+fx)}(c+dx)^3}{a+2be^{i(e+fx)}+ae^{2i(e+fx)}} dx}{a^2} - \\
&= -\frac{ib^2(c+dx)^3}{a^2(a^2-b^2)f} + \frac{(c+dx)^4}{4a^2d} + \frac{b^2(c+dx)^3 \sin(e+fx)}{a(a^2-b^2)f(b+a \cos(e+fx))} - \frac{(2b^3) \int \frac{e^{i(e+fx)}}{a+2be^{i(e+fx)}} dx}{a^2} - \\
&= -\frac{ib^2(c+dx)^3}{a^2(a^2-b^2)f} + \frac{(c+dx)^4}{4a^2d} + \frac{3b^2d(c+dx)^2 \log \left(1 + \frac{ae^{i(e+fx)}}{b-i\sqrt{a^2-b^2}} \right)}{a^2(a^2-b^2)f^2} + \frac{3b^2d(c+dx)^2 \log \left(1 + \frac{ae^{i(e+fx)}}{b-i\sqrt{a^2-b^2}} \right)}{a^2(a^2-b^2)f^2} + \\
&= -\frac{ib^2(c+dx)^3}{a^2(a^2-b^2)f} + \frac{(c+dx)^4}{4a^2d} + \frac{3b^2d(c+dx)^2 \log \left(1 + \frac{ae^{i(e+fx)}}{b-i\sqrt{a^2-b^2}} \right)}{a^2(a^2-b^2)f^2} + \frac{3b^2d(c+dx)^2 \log \left(1 + \frac{ae^{i(e+fx)}}{b-i\sqrt{a^2-b^2}} \right)}{a^2(a^2-b^2)f^2} + \\
&= -\frac{ib^2(c+dx)^3}{a^2(a^2-b^2)f} + \frac{(c+dx)^4}{4a^2d} + \frac{3b^2d(c+dx)^2 \log \left(1 + \frac{ae^{i(e+fx)}}{b-i\sqrt{a^2-b^2}} \right)}{a^2(a^2-b^2)f^2} + \frac{3b^2d(c+dx)^2 \log \left(1 + \frac{ae^{i(e+fx)}}{b-i\sqrt{a^2-b^2}} \right)}{a^2(a^2-b^2)f^2} + \\
&= -\frac{ib^2(c+dx)^3}{a^2(a^2-b^2)f} + \frac{(c+dx)^4}{4a^2d} + \frac{3b^2d(c+dx)^2 \log \left(1 + \frac{ae^{i(e+fx)}}{b-i\sqrt{a^2-b^2}} \right)}{a^2(a^2-b^2)f^2} + \frac{3b^2d(c+dx)^2 \log \left(1 + \frac{ae^{i(e+fx)}}{b-i\sqrt{a^2-b^2}} \right)}{a^2(a^2-b^2)f^2}
\end{aligned}$$

Mathematica [B] Both result and optimal contain complex but leaf count is larger than twice the leaf count of optimal. 9005 vs. 2(1523) = 3046.
time = 27.10, size = 9005, normalized size = 5.91

Result too large to show

Warning: Unable to verify antiderivative.

[In] `Integrate[(c + d*x)^3/(a + b*Sec[e + f*x])^2,x]`

[Out] Result too large to show

Maple [F]

time = 0.31, size = 0, normalized size = 0.00

$$\int \frac{(dx+c)^3}{(a+b\sec(fx+e))^2} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] `int((d*x+c)^3/(a+b*sec(f*x+e))^2,x)`

[Out] `int((d*x+c)^3/(a+b*sec(f*x+e))^2,x)`

Maxima [F(-2)]

time = 0.00, size = 0, normalized size = 0.00

Exception raised: ValueError

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate((d*x+c)^3/(a+b*sec(f*x+e))^2,x, algorithm="maxima")`

[Out] Exception raised: ValueError >> Computation failed since Maxima requested additional constraints; using the 'assume' command before evaluation *may* help (example of legal syntax is 'assume(4*a^2-4*b^2>0)', see 'assume?' for more details)

Fricas [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 7103 vs. 2(1385) = 2770.

time = 3.54, size = 7103, normalized size = 4.66

Too large to display

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate((d*x+c)^3/(a+b*sec(f*x+e))^2,x, algorithm="fricas")`

[Out]
$$\begin{aligned} & \frac{1}{4}*((a^4*b - 2*a^2*b^3 + b^5)*d^3*f^4*x^4 + 4*(a^4*b - 2*a^2*b^3 + b^5)*c*d^2*f^4*x^3 + 6*(a^4*b - 2*a^2*b^3 + b^5)*c^2*d*f^4*x^2 + 4*(a^4*b - 2*a^2*b^3 + b^5)*c^3*f^4*x + 12*((2*a^4*b - a^2*b^3)*d^3*cos(f*x + e) + (2*a^3*b^2 - a*b^4)*d^3)*sqrt(-(a^2 - b^2)/a^2)*polylog(4, -(b*cos(f*x + e) + I*b*sin(f*x + e)) + (a*cos(f*x + e) + I*a*sin(f*x + e)))*sqrt(-(a^2 - b^2)/a^2))/a \\ & - 12*((2*a^4*b - a^2*b^3)*d^3*cos(f*x + e) + (2*a^3*b^2 - a*b^4)*d^3)*sqrt(-(a^2 - b^2)/a^2)*polylog(4, -(b*cos(f*x + e) + I*b*sin(f*x + e)) - (a*cos(f*x + e) + I*a*sin(f*x + e)))*sqrt(-(a^2 - b^2)/a^2) + 12*((2*a^4*b - a^2*b^3)*d^3*cos(f*x + e) + (2*a^3*b^2 - a*b^4)*d^3)*sqrt(-(a^2 - b^2)/a^2))/a \end{aligned}$$

$$\begin{aligned}
& 2*b^3)*d^3*cos(f*x + e) + (2*a^3*b^2 - a*b^4)*d^3)*sqrt(-(a^2 - b^2)/a^2)*polylog(4, -(b*cos(f*x + e) - I*b*sin(f*x + e) + (a*cos(f*x + e) - I*a*sin(f*x + e)))*sqrt(-(a^2 - b^2)/a^2))/a) - 12*((2*a^4*b - a^2*b^3)*d^3*cos(f*x + e) + (2*a^3*b^2 - a*b^4)*d^3)*sqrt(-(a^2 - b^2)/a^2)*polylog(4, -(b*cos(f*x + e) - I*b*sin(f*x + e) - (a*cos(f*x + e) - I*a*sin(f*x + e)))*sqrt(-(a^2 - b^2)/a^2))/a) + ((a^5 - 2*a^3*b^2 + a*b^4)*d^3*f^4*x^4 + 4*(a^5 - 2*a^3*b^2 + a*b^4)*c*d^2*f^4*x^3 + 6*(a^5 - 2*a^3*b^2 + a*b^4)*c^2*d*f^4*x^2 + 4*(a^5 - 2*a^3*b^2 + a*b^4)*c^3*f^4*x)*cos(f*x + e) - 6*(2*I*(a^2*b^3 - b^5)*d^3*f*x + 2*I*(a^2*b^3 - b^5)*c*d^2*f + 2*(I*(a^3*b^2 - a*b^4)*d^3*f*x + I*(a^3*b^2 - a*b^4)*c*d^2*f)*cos(f*x + e) + ((2*a^3*b^2 - a*b^4)*d^3*f^2*x^2 + 2*(2*a^3*b^2 - a*b^4)*c*d^2*f^2*x + (2*a^4*b - a^2*b^3)*d^3*f^2*x^2 + 2*(2*a^4*b - a^2*b^3)*c*d^2*f^2*x + (2*a^4*b - a^2*b^3)*c^2*d*f^2)*cos(f*x + e))*sqrt(-(a^2 - b^2)/a^2))*dilog(-(b*cos(f*x + e) + I*b*sin(f*x + e) + (a*cos(f*x + e) + I*a*sin(f*x + e)))*sqrt(-(a^2 - b^2)/a^2) + a)/a + 1) - 6*(2*I*(a^2*b^3 - b^5)*d^3*f*x + 2*I*(a^2*b^3 - b^5)*c*d^2*f + 2*(I*(a^3*b^2 - a*b^4)*d^3*f*x + I*(a^3*b^2 - a*b^4)*c*d^2*f)*cos(f*x + e) - ((2*a^3*b^2 - a*b^4)*d^3*f^2*x^2 + 2*(2*a^3*b^2 - a*b^4)*c*d^2*f^2*x + (2*a^4*b - a^2*b^3)*d^3*f^2*x^2 + 2*(2*a^4*b - a^2*b^3)*c*d^2*f^2*x + (2*a^4*b - a^2*b^3)*c^2*d*f^2)*cos(f*x + e))*sqrt(-(a^2 - b^2)/a^2))*dilog(-(b*cos(f*x + e) + I*b*sin(f*x + e) - (a*cos(f*x + e) + I*a*sin(f*x + e)))*sqrt(-(a^2 - b^2)/a^2) + a)/a + 1) - 6*(-2*I*(a^2*b^3 - b^5)*d^3*f*x - 2*I*(a^2*b^3 - b^5)*c*d^2*f + 2*(-I*(a^3*b^2 - a*b^4)*d^3*f*x - I*(a^3*b^2 - a*b^4)*c*d^2*f)*cos(f*x + e) + ((2*a^3*b^2 - a*b^4)*d^3*f^2*x^2 + 2*(2*a^3*b^2 - a*b^4)*c*d^2*f^2*x + (2*a^3*b^2 - a*b^4)*c^2*d*f^2 + ((2*a^4*b - a^2*b^3)*d^3*f^2*x^2 + 2*(2*a^4*b - a^2*b^3)*c*d^2*f^2*x + (2*a^4*b - a^2*b^3)*c^2*d*f^2)*cos(f*x + e))*sqrt(-(a^2 - b^2)/a^2))*dilog(-(b*cos(f*x + e) - I*b*sin(f*x + e) + (a*cos(f*x + e) - I*a*sin(f*x + e)))*sqrt(-(a^2 - b^2)/a^2) + a)/a + 1) - 6*(-2*I*(a^2*b^3 - b^5)*d^3*f*x - 2*I*(a^2*b^3 - b^5)*c*d^2*f + 2*(-I*(a^3*b^2 - a*b^4)*d^3*f*x - I*(a^3*b^2 - a*b^4)*c*d^2*f)*cos(f*x + e) - ((2*a^3*b^2 - a*b^4)*d^3*f^2*x^2 + 2*(2*a^3*b^2 - a*b^4)*c*d^2*f^2*x + (2*a^4*b - a^2*b^3)*d^3*f^2*x^2 + 2*(2*a^4*b - a^2*b^3)*c*d^2*f^2*x + (2*a^4*b - a^2*b^3)*c^2*d*f^2)*cos(f*x + e))*sqrt(-(a^2 - b^2)/a^2))*dilog(-(b*cos(f*x + e) - I*b*sin(f*x + e) - (a*cos(f*x + e) - I*a*sin(f*x + e)))*sqrt(-(a^2 - b^2)/a^2) + a)/a + 1) + 2*(3*(a^2*b^3 - b^5)*c^2*d*f^2 - 6*(a^2*b^3 - b^5)*c*d^2*f*e + 3*(a^2*b^3 - b^5)*d^3*e^2 + 3*((a^3*b^2 - a*b^4)*c^2*d*f^2 - 2*(a^3*b^2 - a*b^4)*c*d^2*f*e + (a^3*b^2 - a*b^4)*d^3*e^2)*cos(f*x + e) + (I*(2*a^3*b^2 - a*b^4)*c^3*f^3 - 3*I*(2*a^3*b^2 - a*b^4)*c^2*d*f^2*e + 3*I*(2*a^3*b^2 - a*b^4)*c*d^2*f*e^2 - I*(2*a^3*b^2 - a*b^4)*d^3*e^3 + (I*(2*a^4*b - a^2*b^3)*c^3*f^3 - 3*I*(2*a^4*b - a^2*b^3)*c^2*d*f^2*e + 3*I*(2*a^4*b - a^2*b^3)*c*d^2*f*e^2 - I*(2*a^4*b - a^2*b^3)*d^3*e^3)*cos(f*x + e))*sqrt(-(a^2 - b^2)/a^2))*log(2*a*cos(f*x + e) + 2*I*a*sin(f*x + e) + 2*a*sqrt(-(a^2 - b^2)/a^2) + 2*b) + 2*(3*(a^2*b^3 - b^5)*c^2*d*f^2 - 6*(a^2*b^3 - b^5)*c*d^2*f*e + 3*(a^2*b^3 - b^5)*d^3*e^2 + 3*((a^3*b^2 - a*b^4)*c^2*d*f^2 - 2*(a^3*b^2 - a*b^4)*c*d^2*f*e + (a^3*b^2 - a*b^4)*d^3*e^2)*cos(f*x + e) +
\end{aligned}$$

$$\begin{aligned}
& (-I*(2*a^3*b^2 - a*b^4)*c^3*f^3 + 3*I*(2*a^3*b^2 - a*b^4)*c^2*d*f^2*e - 3*I \\
& *(2*a^3*b^2 - a*b^4)*c*d^2*f*e^2 + I*(2*a^3*b^2 - a*b^4)*d^3*e^3 + (-I*(2*a \\
& ^4*b - a^2*b^3)*c^3*f^3 + 3*I*(2*a^4*b - a^2*b^3)*c^2*d*f^2*e - 3*I*(2*a^4* \\
& b - a^2*b^3)*c*d^2*f*e^2 + I*(2*a^4*b - a^2*b^3)*d^3*e^3)*cos(f*x + e))*sqrt \\
& t(-(a^2 - b^2)/a^2))*log(2*a*cos(f*x + e) - 2*I*a*sin(f*x + e) + 2*a*sqrt(- \\
& (a^2 - b^2)/a^2) + 2*b) + 2*(3*(a^2*b^3 - b^5)*c^2*d*f^2 - 6*(a^2*b^3 - b^5) \\
&)*c*d^2*f*e + 3*(a^2*b^3 - b^5)*d^3*e^2 + 3*((a^3*b^2 - a*b^4)*c^2*d*f^2 - \\
& 2*(a^3*b^2 - a*b^4)*c*d^2*f*e + (a^3*b^2 - a*b^4)*d^3*e^2)*cos(f*x + e) + (\\
& I*(2*a^3*b^2 - a*b^4)*c^3*f^3 - 3*I*(2*a^3*b^2 - a*b^4)*c^2*d*f^2*e + 3*I*(\\
& 2*a^3*b^2 - a*b^4)*c*d^2*f*e^2 - I*(2*a^3*b^2 - a*b^4)*d^3*e^3 + (I*(2*a^4* \\
& b - a^2*b^3)*c^3*f^3 - 3*I*(2*a^4*b - a^2*b^3)*c^2*d*f^2*e + 3*I*(2*a^4*b - \\
& a^2*b^3)*c*d^2*f*e^2 - I*(2*a^4*b - a^2*b^3)*d^3*e^3)*cos(f*x + e))*sqrt(- \\
& (a^2 - b^2)/a^2))*log(-2*a*cos(f*x + e) + 2*I*a*sin(f*x + e) + 2*a*sqrt(- \\
& (a^2 - b^2)/a^2) - 2*b) + 2*(3*(a^2*b^3 - b^5)*c^...
\end{aligned}$$
Sympy [F]

time = 0.00, size = 0, normalized size = 0.00

$$\int \frac{(c + dx)^3}{(a + b \sec(e + fx))^2} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] integrate((d*x+c)**3/(a+b*sec(f*x+e))**2,x)

[Out] Integral((c + d*x)**3/(a + b*sec(e + f*x))**2, x)

Giac [F]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] integrate((d*x+c)^3/(a+b*sec(f*x+e))^2,x, algorithm="giac")

[Out] integrate((d*x + c)^3/(b*sec(f*x + e) + a)^2, x)

Mupad [F(-1)]

time = 0.00, size = -1, normalized size = -0.00

Hanged

Verification of antiderivative is not currently implemented for this CAS.

[In] int((c + d*x)^3/(a + b/cos(e + f*x))^2,x)

[Out] \text{Hanged}

3.40 $\int \frac{(c+dx)^2}{(a+b\sec(e+fx))^2} dx$

Optimal. Leaf size=1117

$$-\frac{ib^2(c+dx)^2}{a^2(a^2-b^2)f} + \frac{(c+dx)^3}{3a^2d} + \frac{2b^2d(c+dx)\log\left(1+\frac{ae^{i(e+fx)}}{b-i\sqrt{a^2-b^2}}\right)}{a^2(a^2-b^2)f^2} + \frac{2b^2d(c+dx)\log\left(1+\frac{ae^{i(e+fx)}}{b+i\sqrt{a^2-b^2}}\right)}{a^2(a^2-b^2)f^2}$$

[Out] $-I*b^3*(d*x+c)^2*ln(1+a*exp(I*(f*x+e))/(b-(-a^2+b^2)^(1/2)))/a^2/(-a^2+b^2)^(3/2)/f+1/3*(d*x+c)^3/a^2/d+2*b^2*d*(d*x+c)*ln(1+a*exp(I*(f*x+e))/(b-I*(a^2-b^2)^(1/2)))/a^2/(a^2-b^2)/f^2+2*b^2*d*(d*x+c)*ln(1+a*exp(I*(f*x+e))/(b+I*(a^2-b^2)^(1/2)))/a^2/(a^2-b^2)/f^2-2*I*b^3*d^2*polylog(3,-a*exp(I*(f*x+e))/(b-(-a^2+b^2)^(1/2)))/a^2/(-a^2+b^2)^(3/2)/f^3-4*I*b*d^2*polylog(3,-a*exp(I*(f*x+e))/(b+(-a^2+b^2)^(1/2)))/a^2/f^3/(-a^2+b^2)^(1/2)-2*I*b^2*d^2*polylog(2,-a*exp(I*(f*x+e))/(b-I*(a^2-b^2)^(1/2)))/a^2/(a^2-b^2)/f^3-2*I*b*(d*x+c)^2*ln(1+a*exp(I*(f*x+e))/(b+(-a^2+b^2)^(1/2)))/a^2/f/(-a^2+b^2)^(1/2)-2*b^3*d*(d*x+c)*polylog(2,-a*exp(I*(f*x+e))/(b-(-a^2+b^2)^(1/2)))/a^2/(-a^2+b^2)^(3/2)/f^2+2*b^3*d*(d*x+c)*polylog(2,-a*exp(I*(f*x+e))/(b+(-a^2+b^2)^(1/2)))/a^2/(-a^2+b^2)^(3/2)/f^2+2*I*b^3*d^2*polylog(3,-a*exp(I*(f*x+e))/(b+(-a^2+b^2)^(1/2)))/a^2/(-a^2+b^2)^(3/2)/f^3+b^3*d*(d*x+c)^2*ln(1+a*exp(I*(f*x+e))/(b-(-a^2+b^2)^(1/2)))/a^2/(-a^2+b^2)^(3/2)/f^3+b^3*d*(d*x+c)^2*sin(f*x+e)/a/(a^2-b^2)/f/(b+a*cos(f*x+e))+I*b^3*(d*x+c)^2*ln(1+a*exp(I*(f*x+e))/(b+(-a^2+b^2)^(1/2)))/a^2/(-a^2+b^2)^(3/2)/f^4+I*b*d^2*polylog(3,-a*exp(I*(f*x+e))/(b-(-a^2+b^2)^(1/2)))/a^2/f^3/(-a^2+b^2)^(1/2)+4*b*d*(d*x+c)*polylog(2,-a*exp(I*(f*x+e))/(b-(-a^2+b^2)^(1/2)))/a^2/f^3/(-a^2+b^2)^(1/2)-4*b*d*(d*x+c)*polylog(2,-a*exp(I*(f*x+e))/(b+(-a^2+b^2)^(1/2)))/a^2/f^2/(-a^2+b^2)^(1/2)-2*I*b^2*d^2*polylog(2,-a*exp(I*(f*x+e))/(b+I*(a^2-b^2)^(1/2)))/a^2/(a^2-b^2)/f^3-I*b^2*(d*x+c)^2/a^2/(-a^2+b^2)/f$

Rubi [A]

time = 1.54, antiderivative size = 1117, normalized size of antiderivative = 1.00, number of steps used = 30, number of rules used = 11, integrand size = 20, $\frac{\text{number of rules}}{\text{integrand size}} = 0.550$, Rules used = {4276, 3405, 3402, 2296, 2221, 2611, 2320, 6724, 4618, 2317, 2438}

$\frac{a c + a d x^2 \operatorname{atan}\left(\frac{c + d x}{\sqrt{a^2 - b^2}}\right)}{x^2 \left(a^2 - b^2\right)^2}, \frac{a c + a d x^2 \operatorname{atan}\left(\frac{c + d x}{\sqrt{a^2 - b^2}}\right) x^2}{x^3 \left(a^2 - b^2\right)^2}, \frac{a d x + a d^2 x^3 \operatorname{atan}\left(\frac{c + d x}{\sqrt{a^2 - b^2}}\right)}{x^5 \left(a^2 - b^2\right)^2}, \frac{a d x + a d^2 x^3 \operatorname{atan}\left(\frac{c + d x}{\sqrt{a^2 - b^2}}\right) x^2}{x^6 \left(a^2 - b^2\right)^2}, \frac{a d^2 x^5 \operatorname{atan}\left(\frac{c + d x}{\sqrt{a^2 - b^2}}\right)}{x^8 \left(a^2 - b^2\right)^2}, \frac{a d^2 x^5 \operatorname{atan}\left(\frac{c + d x}{\sqrt{a^2 - b^2}}\right) x^3}{x^9 \left(a^2 - b^2\right)^2}, \frac{a d^2 x^5 \operatorname{atan}\left(\frac{c + d x}{\sqrt{a^2 - b^2}}\right) x^5}{x^{10} \left(a^2 - b^2\right)^2}, \frac{2 a d x^4 \operatorname{atan}\left(\frac{c + d x}{\sqrt{a^2 - b^2}}\right)}{x^7 \left(a^2 - b^2\right)^2}, \frac{2 a d x^4 \operatorname{atan}\left(\frac{c + d x}{\sqrt{a^2 - b^2}}\right) x^4}{x^8 \left(a^2 - b^2\right)^2}, \frac{2 a d x^4 \operatorname{atan}\left(\frac{c + d x}{\sqrt{a^2 - b^2}}\right) x^6}{x^9 \left(a^2 - b^2\right)^2}, \frac{2 a d x^4 \operatorname{atan}\left(\frac{c + d x}{\sqrt{a^2 - b^2}}\right) x^8}{x^{10} \left(a^2 - b^2\right)^2}, \frac{2 a d x^6 \operatorname{atan}\left(\frac{c + d x}{\sqrt{a^2 - b^2}}\right)}{x^5 \left(a^2 - b^2\right)^2}, \frac{2 a d x^6 \operatorname{atan}\left(\frac{c + d x}{\sqrt{a^2 - b^2}}\right) x^2}{x^6 \left(a^2 - b^2\right)^2}, \frac{2 a d x^6 \operatorname{atan}\left(\frac{c + d x}{\sqrt{a^2 - b^2}}\right) x^4}{x^7 \left(a^2 - b^2\right)^2}, \frac{2 a d x^6 \operatorname{atan}\left(\frac{c + d x}{\sqrt{a^2 - b^2}}\right) x^6}{x^8 \left(a^2 - b^2\right)^2}, \frac{2 a d x^6 \operatorname{atan}\left(\frac{c + d x}{\sqrt{a^2 - b^2}}\right) x^8}{x^9 \left(a^2 - b^2\right)^2}, \frac{2 a d x^8 \operatorname{atan}\left(\frac{c + d x}{\sqrt{a^2 - b^2}}\right)}{x^3 \left(a^2 - b^2\right)^2}, \frac{2 a d x^8 \operatorname{atan}\left(\frac{c + d x}{\sqrt{a^2 - b^2}}\right) x}{x^4 \left(a^2 - b^2\right)^2}, \frac{2 a d x^8 \operatorname{atan}\left(\frac{c + d x}{\sqrt{a^2 - b^2}}\right) x^3}{x^5 \left(a^2 - b^2\right)^2}, \frac{2 a d x^8 \operatorname{atan}\left(\frac{c + d x}{\sqrt{a^2 - b^2}}\right) x^5}{x^6 \left(a^2 - b^2\right)^2}, \frac{2 a d x^8 \operatorname{atan}\left(\frac{c + d x}{\sqrt{a^2 - b^2}}\right) x^7}{x^7 \left(a^2 - b^2\right)^2}, \frac{2 a d x^{10} \operatorname{atan}\left(\frac{c + d x}{\sqrt{a^2 - b^2}}\right)}{x \left(a^2 - b^2\right)^2}, \frac{2 a d x^{10} \operatorname{atan}\left(\frac{c + d x}{\sqrt{a^2 - b^2}}\right) x^2}{x^3 \left(a^2 - b^2\right)^2}, \frac{2 a d x^{10} \operatorname{atan}\left(\frac{c + d x}{\sqrt{a^2 - b^2}}\right) x^4}{x^5 \left(a^2 - b^2\right)^2}, \frac{2 a d x^{10} \operatorname{atan}\left(\frac{c + d x}{\sqrt{a^2 - b^2}}\right) x^6}{x^7 \left(a^2 - b^2\right)^2}, \frac{2 a d x^{10} \operatorname{atan}\left(\frac{c + d x}{\sqrt{a^2 - b^2}}\right) x^8}{x^9 \left(a^2 - b^2\right)^2}, \frac{2 a d x^{12} \operatorname{atan}\left(\frac{c + d x}{\sqrt{a^2 - b^2}}\right)}{x^3 \left(a^2 - b^2\right)^2}, \frac{2 a d x^{12} \operatorname{atan}\left(\frac{c + d x}{\sqrt{a^2 - b^2}}\right) x^4}{x^5 \left(a^2 - b^2\right)^2}, \frac{2 a d x^{12} \operatorname{atan}\left(\frac{c + d x}{\sqrt{a^2 - b^2}}\right) x^6}{x^7 \left(a^2 - b^2\right)^2}, \frac{2 a d x^{12} \operatorname{atan}\left(\frac{c + d x}{\sqrt{a^2 - b^2}}\right) x^8}{x^9 \left(a^2 - b^2\right)^2}, \frac{2 a d x^{14} \operatorname{atan}\left(\frac{c + d x}{\sqrt{a^2 - b^2}}\right)}{x^5 \left(a^2 - b^2\right)^2}, \frac{2 a d x^{14} \operatorname{atan}\left(\frac{c + d x}{\sqrt{a^2 - b^2}}\right) x^6}{x^7 \left(a^2 - b^2\right)^2}, \frac{2 a d x^{14} \operatorname{atan}\left(\frac{c + d x}{\sqrt{a^2 - b^2}}\right) x^8}{x^9 \left(a^2 - b^2\right)^2}, \frac{2 a d x^{16} \operatorname{atan}\left(\frac{c + d x}{\sqrt{a^2 - b^2}}\right)}{x^7 \left(a^2 - b^2\right)^2}, \frac{2 a d x^{16} \operatorname{atan}\left(\frac{c + d x}{\sqrt{a^2 - b^2}}\right) x^8}{x^9 \left(a^2 - b^2\right)^2}$

Antiderivative was successfully verified.

[In] $\text{Int}[(c + d*x)^2/(a + b*\text{Sec}[e + f*x])^2, x]$

[Out] $((-I)*b^2*(c + d*x)^2)/(a^2*(a^2 - b^2)*f) + (c + d*x)^3/(3*a^2*d) + (2*b^2*d*(c + d*x)*\text{Log}[1 + (a*E^(\text{I}*(e + f*x)))/(b - I*\text{Sqrt}[a^2 - b^2])])/(a^2*(a^2 - b^2)*f^2) + (2*b^2*d*(c + d*x)*\text{Log}[1 + (a*E^(\text{I}*(e + f*x)))/(b + I*\text{Sqrt}[a^2 - b^2])])/(a^2*(a^2 - b^2)*f^2) - (I*b^3*(c + d*x)^2*\text{Log}[1 + (a*E^(\text{I}*(e + f*x)))/(b - \text{Sqrt}[-a^2 + b^2])])/(a^2*(-a^2 + b^2)^(3/2)*f) + ((2*I)*b*(c + d*x)^3)/(a^2*(a^2 - b^2))$

```

+ d*x)^2*Log[1 + (a*E^(I*(e + f*x)))/(b - Sqrt[-a^2 + b^2])]/(a^2*Sqrt[-a^2 + b^2]*f) + (I*b^3*(c + d*x)^2*Log[1 + (a*E^(I*(e + f*x)))/(b + Sqrt[-a^2 + b^2])])/(a^2*(-a^2 + b^2)^(3/2)*f) - ((2*I)*b*(c + d*x)^2*Log[1 + (a*E^(I*(e + f*x)))/(b + Sqrt[-a^2 + b^2])])/(a^2*Sqrt[-a^2 + b^2]*f) - ((2*I)*b^2*d^2*PolyLog[2, -(a*E^(I*(e + f*x)))/(b - I*Sqrt[a^2 - b^2])])/(a^2*(a^2 - b^2)*f^3) - ((2*I)*b^2*d^2*PolyLog[2, -(a*E^(I*(e + f*x)))/(b + I*Sqrt[a^2 - b^2])])/(a^2*(a^2 - b^2)*f^3) - (2*b^3*d*(c + d*x)*PolyLog[2, -(a*E^(I*(e + f*x)))/(b - Sqrt[-a^2 + b^2])])/(a^2*(-a^2 + b^2)^(3/2)*f^2) + (4*b*d*(c + d*x)*PolyLog[2, -(a*E^(I*(e + f*x)))/(b - Sqrt[-a^2 + b^2])])/(a^2*Sqrt[-a^2 + b^2]*f^2) + (2*b^3*d*(c + d*x)*PolyLog[2, -(a*E^(I*(e + f*x)))/(b + Sqrt[-a^2 + b^2])])/(a^2*(-a^2 + b^2)^(3/2)*f^2) - (4*b*d*(c + d*x)*PolyLog[2, -(a*E^(I*(e + f*x)))/(b + Sqrt[-a^2 + b^2])])/(a^2*Sqrt[-a^2 + b^2]*f^2) - ((2*I)*b^3*d^2*PolyLog[3, -(a*E^(I*(e + f*x)))/(b - Sqrt[-a^2 + b^2])])/(a^2*(-a^2 + b^2)^(3/2)*f^3) + ((4*I)*b*d^2*PolyLog[3, -(a*E^(I*(e + f*x)))/(b - Sqrt[-a^2 + b^2])])/(a^2*Sqrt[-a^2 + b^2]*f^3) + ((2*I)*b^3*d^2*PolyLog[3, -(a*E^(I*(e + f*x)))/(b + Sqrt[-a^2 + b^2])])/(a^2*(-a^2 + b^2)^(3/2)*f^3) - ((4*I)*b*d^2*PolyLog[3, -(a*E^(I*(e + f*x)))/(b + Sqrt[-a^2 + b^2])])/(a^2*Sqrt[-a^2 + b^2]*f^3) + (b^2*(c + d*x)^2*Sin[e + f*x])/(a*(a^2 - b^2)*f*(b + a*Cos[e + f*x]))

```

Rule 2221

```

Int[((F_)^((g_.)*(e_.) + (f_.)*(x_.)))^(n_.)*(c_.) + (d_.)*(x_.)^(m_.))/((a_) + (b_.)*(F_)^((g_.)*(e_.) + (f_.)*(x_.)))^(n_.)), x_Symbol] :> Simp[((c + d*x)^m/(b*f*g*n*Log[F]))*Log[1 + b*((F^(g*(e + f*x)))^n/a)], x] - Dist[d*(m/(b*f*g*n*Log[F])), Int[(c + d*x)^(m - 1)*Log[1 + b*((F^(g*(e + f*x)))^n/a)], x] /; FreeQ[{F, a, b, c, d, e, f, g, n}, x] && IGtQ[m, 0]

```

Rule 2296

```

Int[((F_)^u_)*(f_.) + (g_.)*(x_.))^m_.)/((a_.) + (b_.)*(F_)^u_ + (c_.)*(F_)^v_), x_Symbol] :> With[{q = Rt[b^2 - 4*a*c, 2]}, Dist[2*(c/q), Int[(f + g*x)^m*(F^u/(b - q + 2*c*F^u)), x], x] - Dist[2*(c/q), Int[(f + g*x)^m*(F^u/(b + q + 2*c*F^u)), x], x]] /; FreeQ[{F, a, b, c, f, g}, x] && EqQ[v, 2*u] && LinearQ[u, x] && NeQ[b^2 - 4*a*c, 0] && IGtQ[m, 0]

```

Rule 2317

```

Int[Log[(a_) + (b_.)*(F_)^((e_.)*(c_.) + (d_.)*(x_.)))^(n_.)], x_Symbol] :> Dist[1/(d*e*n*Log[F]), Subst[Int[Log[a + b*x]/x, x], x, (F^(e*(c + d*x)))^n], x] /; FreeQ[{F, a, b, c, d, e, n}, x] && GtQ[a, 0]

```

Rule 2320

```

Int[u_, x_Symbol] :> With[{v = FunctionOfExponential[u, x]}, Dist[v/D[v, x], Subst[Int[FunctionOfExponentialFunction[u, x]/x, x], x, v], x]] /; FunctionOfExponentialQ[u, x] && !MatchQ[u, (w_)*((a_.)*(v_.)^(n_.))^(m_.)] /; FreeQ[

```

```
{a, m, n}, x] && IntegerQ[m*n]] && !MatchQ[u, E^((c_)*(a_ + (b_)*x))*(F_)[v_] /; FreeQ[{a, b, c}, x] && InverseFunctionQ[F[x]]]
```

Rule 2438

```
Int[Log[(c_)*(d_ + (e_)*(x_)^(n_))]/(x_), x_Symbol] :> Simp[-PolyLog[2, (-c)*e*x^n]/n, x] /; FreeQ[{c, d, e, n}, x] && EqQ[c*d, 1]
```

Rule 2611

```
Int[Log[1 + (e_)*((F_)^((c_)*(a_ + (b_)*(x_))))^(n_)]*((f_)+(g_)*(x_)^m), x_Symbol] :> Simp[(-(f + g*x)^m)*(PolyLog[2, (-e)*(F^(c*(a + b*x)))^n]/(b*c*n*Log[F])), x] + Dist[g*(m/(b*c*n*Log[F])), Int[(f + g*x)^(m - 1)*PolyLog[2, (-e)*(F^(c*(a + b*x)))^n], x], x] /; FreeQ[{F, a, b, c, e, f, g, n}, x] && GtQ[m, 0]
```

Rule 3402

```
Int[((c_)+(d_)*(x_)^m)/((a_)+(b_)*sin[e_]+Pi*(k_)+(f_)*(x_)), x_Symbol] :> Dist[2, Int[(c+d*x)^m*E^(I*Pi*(k - 1/2))*(E^(I*(e+f*x))/(b+2*a*E^(I*Pi*(k - 1/2))*E^(I*(e+f*x)) - b*E^(2*I*k*Pi)*E^(2*I*(e+f*x))), x], x] /; FreeQ[{a, b, c, d, e, f}, x] && IntegerQ[2*k] && NeQ[a^2 - b^2, 0] && IGtQ[m, 0]
```

Rule 3405

```
Int[((c_)+(d_)*(x_)^m)/((a_)+(b_)*sin[e_]+(f_)*(x_))^2, x_Symbol] :> Simp[b*(c+d*x)^m*(Cos[e+f*x]/(f*(a^2 - b^2)*(a+b*Sin[e+f*x])), x] + (Dist[a/(a^2 - b^2), Int[(c+d*x)^m/(a+b*Sin[e+f*x]), x], x] - Dist[b*d*(m/(f*(a^2 - b^2))), Int[(c+d*x)^(m - 1)*(Cos[e+f*x]/(a+b*Sin[e+f*x])), x], x]) /; FreeQ[{a, b, c, d, e, f}, x] && NeQ[a^2 - b^2, 0] && IGtQ[m, 0]
```

Rule 4276

```
Int[(csc[(e_)+(f_)*(x_)]*(b_)+(a_))^n*((c_)+(d_)*(x_))^m, x_Symbol] :> Int[ExpandIntegrand[(c+d*x)^m, 1/(Sin[e+f*x]^n/(b+a*Sin[e+f*x])^n), x], x] /; FreeQ[{a, b, c, d, e, f}, x] && ILtQ[n, 0] && IQ[m, 0]
```

Rule 4618

```
Int[((e_)+(f_)*(x_))^m*Sin[(c_)+(d_)*(x_)]/(Cos[(c_)+(d_)*(x_)]*(b_)+(a_)), x_Symbol] :> Simp[I*((e+f*x)^(m + 1)/(b*f*(m + 1))), x] + (Int[(e+f*x)^m*(E^(I*(c+d*x))/(I*a - Rt[-a^2 + b^2, 2] + I*b*E^(I*(c+d*x)))), x] + Int[(e+f*x)^m*(E^(I*(c+d*x))/(I*a + Rt[-a^2 + b^2,
```

```
2] + I*b*E^(-(I*(c + d*x))), x]) /; FreeQ[{a, b, c, d, e, f}, x] && IGtQ[m,
0] && NegQ[a^2 - b^2]
```

Rule 6724

```
Int[PolyLog[n_, (c_)*(a_) + (b_)*(x_)]^p]/((d_) + (e_)*(x_)), x_Symbol] := Simp[PolyLog[n + 1, c*(a + b*x)^p]/(e*p), x] /; FreeQ[{a, b, c, d, e, n, p}, x] && EqQ[b*d, a*e]
```

Rubi steps

$$\begin{aligned}
\int \frac{(c+dx)^2}{(a+b\sec(e+fx))^2} dx &= \int \left(\frac{(c+dx)^2}{a^2} + \frac{b^2(c+dx)^2}{a^2(b+a\cos(e+fx))^2} - \frac{2b(c+dx)^2}{a^2(b+a\cos(e+fx))} \right) dx \\
&= \frac{(c+dx)^3}{3a^2d} - \frac{(2b) \int \frac{(c+dx)^2}{b+a\cos(e+fx)} dx}{a^2} + \frac{b^2 \int \frac{(c+dx)^2}{(b+a\cos(e+fx))^2} dx}{a^2} \\
&= \frac{(c+dx)^3}{3a^2d} + \frac{b^2(c+dx)^2 \sin(e+fx)}{a(a^2-b^2)f(b+a\cos(e+fx))} - \frac{(4b) \int \frac{e^{i(e+fx)}(c+dx)^2}{a+2be^{i(e+fx)}+ae^{2i(e+fx)}} dx}{a^2} \\
&= -\frac{ib^2(c+dx)^2}{a^2(a^2-b^2)f} + \frac{(c+dx)^3}{3a^2d} + \frac{b^2(c+dx)^2 \sin(e+fx)}{a(a^2-b^2)f(b+a\cos(e+fx))} - \frac{(2b^3) \int \frac{e^{i(e+fx)}}{a+2be^{i(e+fx)}+ae^{2i(e+fx)}} dx}{a^2} \\
&= -\frac{ib^2(c+dx)^2}{a^2(a^2-b^2)f} + \frac{(c+dx)^3}{3a^2d} + \frac{2b^2d(c+dx) \log \left(1 + \frac{ae^{i(e+fx)}}{b-i\sqrt{a^2-b^2}} \right)}{a^2(a^2-b^2)f^2} + \frac{2b^2d(c+dx) \log \left(1 + \frac{ae^{i(e+fx)}}{b+i\sqrt{a^2-b^2}} \right)}{a^2(a^2-b^2)f^2} \\
&= -\frac{ib^2(c+dx)^2}{a^2(a^2-b^2)f} + \frac{(c+dx)^3}{3a^2d} + \frac{2b^2d(c+dx) \log \left(1 + \frac{ae^{i(e+fx)}}{b-i\sqrt{a^2-b^2}} \right)}{a^2(a^2-b^2)f^2} + \frac{2b^2d(c+dx) \log \left(1 + \frac{ae^{i(e+fx)}}{b+i\sqrt{a^2-b^2}} \right)}{a^2(a^2-b^2)f^2} \\
&= -\frac{ib^2(c+dx)^2}{a^2(a^2-b^2)f} + \frac{(c+dx)^3}{3a^2d} + \frac{2b^2d(c+dx) \log \left(1 + \frac{ae^{i(e+fx)}}{b-i\sqrt{a^2-b^2}} \right)}{a^2(a^2-b^2)f^2} + \frac{2b^2d(c+dx) \log \left(1 + \frac{ae^{i(e+fx)}}{b+i\sqrt{a^2-b^2}} \right)}{a^2(a^2-b^2)f^2}
\end{aligned}$$

Mathematica [B] Both result and optimal contain complex but leaf count is larger than twice the leaf count of optimal. 11147 vs. $2(1117) = 2234$.
 time = 22.39, size = 11147, normalized size = 9.98

Result too large to show

Antiderivative was successfully verified.

[In] `Integrate[(c + d*x)^2/(a + b*Sec[e + f*x])^2,x]`
 [Out] Result too large to show

Maple [F]

time = 0.36, size = 0, normalized size = 0.00

$$\int \frac{(dx + c)^2}{(a + b \sec(fx + e))^2} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] `int((d*x+c)^2/(a+b*sec(f*x+e))^2,x)`
 [Out] `int((d*x+c)^2/(a+b*sec(f*x+e))^2,x)`

Maxima [F(-2)]

time = 0.00, size = 0, normalized size = 0.00

Exception raised: ValueError

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate((d*x+c)^2/(a+b*sec(f*x+e))^2,x, algorithm="maxima")`
 [Out] Exception raised: ValueError >> Computation failed since Maxima requested additional constraints; using the 'assume' command before evaluation *may* help (example of legal syntax is 'assume(4*a^2-4*b^2>0)', see 'assume?' for more de

Fricas [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 4381 vs. $2(1009) = 2018$.

time = 3.85, size = 4381, normalized size = 3.92

Too large to display

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate((d*x+c)^2/(a+b*sec(f*x+e))^2,x, algorithm="fricas")`
 [Out]
$$\begin{aligned} 1/6*(2*(a^4*b - 2*a^2*b^3 + b^5)*d^2*f^3*x^3 + 6*(a^4*b - 2*a^2*b^3 + b^5)* \\ c*d*f^3*x^2 + 6*(a^4*b - 2*a^2*b^3 + b^5)*c^2*f^3*x - 6*(I*(2*a^4*b - a^2*b^5)* \\ \end{aligned}$$

$$\begin{aligned}
& -3)*d^2*cos(f*x + e) + I*(2*a^3*b^2 - a*b^4)*d^2)*sqrt(-(a^2 - b^2)/a^2)*polylog(3, -(b*cos(f*x + e) + I*b*sin(f*x + e) + (a*cos(f*x + e) + I*a*sin(f*x + e)))*sqrt(-(a^2 - b^2)/a^2))/a) - 6*(-I*(2*a^4*b - a^2*b^3)*d^2*cos(f*x + e) - I*(2*a^3*b^2 - a*b^4)*d^2)*sqrt(-(a^2 - b^2)/a^2)*polylog(3, -(b*cos(f*x + e) + I*b*sin(f*x + e) - (a*cos(f*x + e) + I*a*sin(f*x + e)))*sqrt(-(a^2 - b^2)/a^2))/a) - 6*(-I*(2*a^4*b - a^2*b^3)*d^2*cos(f*x + e) - I*(2*a^3*b^2 - a*b^4)*d^2)*sqrt(-(a^2 - b^2)/a^2)*polylog(3, -(b*cos(f*x + e) - I*b*sin(f*x + e) + (a*cos(f*x + e) - I*a*sin(f*x + e)))*sqrt(-(a^2 - b^2)/a^2))/a) - 6*(I*(2*a^4*b - a^2*b^3)*d^2*cos(f*x + e) + I*(2*a^3*b^2 - a*b^4)*d^2)*sqrt(-(a^2 - b^2)/a^2)*polylog(3, -(b*cos(f*x + e) - I*b*sin(f*x + e) - (a*cos(f*x + e) - I*a*sin(f*x + e)))*sqrt(-(a^2 - b^2)/a^2))/a) + 2*((a^5 - 2*a^3*b^2 + a*b^4)*d^2*f^3*x^3 + 3*(a^5 - 2*a^3*b^2 + a*b^4)*c^2*f^3*x)*cos(f*x + e) - 6*(I*(a^3*b^2 - a*b^4)*d^2*cos(f*x + e) + I*(a^2*b^3 - b^5)*d^2 + ((2*a^3*b^2 - a*b^4)*d^2*f*x + (2*a^3*b^2 - a*b^4)*c*d*f + ((2*a^4*b - a^2*b^3)*d^2*f*x + (2*a^4*b - a^2*b^3)*c*d*f)*cos(f*x + e))*sqrt(-(a^2 - b^2)/a^2))*dilog(-(b*cos(f*x + e) + I*b*sin(f*x + e) + (a*cos(f*x + e) + I*a*sin(f*x + e)))*sqrt(-(a^2 - b^2)/a^2) + a)/a + 1) - 6*(I*(a^3*b^2 - a*b^4)*d^2*cos(f*x + e) + I*(a^2*b^3 - b^5)*d^2 - ((2*a^3*b^2 - a*b^4)*d^2*f*x + (2*a^3*b^2 - a*b^4)*c*d*f + ((2*a^4*b - a^2*b^3)*d^2*f*x + (2*a^4*b - a^2*b^3)*c*d*f)*cos(f*x + e))*sqrt(-(a^2 - b^2)/a^2) + a)/a + 1) - 6*(-I*(a^3*b^2 - a*b^4)*d^2*cos(f*x + e) - I*(a^2*b^3 - b^5)*d^2 + ((2*a^3*b^2 - a*b^4)*d^2*f*x + (2*a^3*b^2 - a*b^4)*c*d*f + ((2*a^4*b - a^2*b^3)*d^2*f*x + (2*a^4*b - a^2*b^3)*c*d*f)*cos(f*x + e))*sqrt(-(a^2 - b^2)/a^2) + a)/a + 1) + 3*(2*(a^2*b^3 - b^5)*c*d*f - 2*(a^2*b^3 - b^5)*d^2*e + 2*((a^3*b^2 - a*b^4)*c*d*f - (a^3*b^2 - a*b^4)*d^2*e)*cos(f*x + e) - (-I*(2*a^3*b^2 - a*b^4)*c^2*f^2 + 2*I*(2*a^3*b^2 - a*b^4)*c*d*f*e - I*(2*a^3*b^2 - a*b^4)*d^2*e^2 + (-I*(2*a^4*b - a^2*b^3)*c^2*f^2 + 2*I*(2*a^4*b - a^2*b^3)*c*d*f*e - I*(2*a^4*b - a^2*b^3)*d^2*e^2)*cos(f*x + e))*sqrt(-(a^2 - b^2)/a^2))*log(2*a*cos(f*x + e) + 2*I*a*sin(f*x + e) + 2*a*sqrt(-(a^2 - b^2)/a^2) + 2*b) + 3*(2*(a^2*b^3 - b^5)*c*d*f - 2*(a^2*b^3 - b^5)*d^2*e + 2*((a^3*b^2 - a*b^4)*c*d*f - (a^3*b^2 - a*b^4)*d^2*e)*cos(f*x + e) - (I*(2*a^3*b^2 - a*b^4)*c^2*f^2 - 2*I*(2*a^3*b^2 - a*b^4)*c*d*f*e + I*(2*a^3*b^2 - a*b^4)*d^2*e^2 + (I*(2*a^4*b - a^2*b^3)*c^2*f^2 - 2*I*(2*a^4*b - a^2*b^3)*c*d*f*e + I*(2*a^4*b - a^2*b^3)*d^2*e^2)*cos(f*x + e))*sqrt(-(a^2 - b^2)/a^2))*log(2*a*cos(f*x + e) - 2*I*a*sin(f*x + e) + 2*a*sqrt(-(a^2 - b^2)/a^2) + 2*b) + 3*(2*(a^2*b^3 - b^5)*c*d*f - 2*(a^2*b^3 - b^5)*d^2*e + 2*((a^3*b^2 - a*b^4)*c*d*f - (a^3*b^2 - a*b^4)*d^2*e)*cos(f*x + e) - (-I*(2*a^3*b^2 - a*b^4)*c^2*f^2 + 2*I*(2*a^3*b^2 - a*b^4)*c*d*f*e
\end{aligned}$$

$$\begin{aligned}
& -I*(2*a^3*b^2 - a*b^4)*d^2*e^2 + (-I*(2*a^4*b - a^2*b^3)*c^2*f^2 + 2*I*(2*a^4*b - a^2*b^3)*c*d*f*e - I*(2*a^4*b - a^2*b^3)*d^2*e^2)*cos(f*x + e))*sqrt(-(a^2 - b^2)/a^2))*log(-2*a*cos(f*x + e) + 2*I*a*sin(f*x + e) + 2*a*sqrt(-(a^2 - b^2)/a^2) - 2*b) + 3*(2*(a^2*b^3 - b^5)*c*d*f - 2*(a^2*b^3 - b^5)*d^2*e + 2*((a^3*b^2 - a*b^4)*c*d*f - (a^3*b^2 - a*b^4)*d^2*e)*cos(f*x + e)) \\
& - (I*(2*a^3*b^2 - a*b^4)*c^2*f^2 - 2*I*(2*a^3*b^2 - a*b^4)*c*d*f*e + I*(2*a^3*b^2 - a*b^4)*d^2*e^2 + (I*(2*a^4*b - a^2*b^3)*c^2*f^2 - 2*I*(2*a^4*b - a^2*b^3)*c*d*f*e + I*(2*a^4*b - a^2*b^3)*d^2*e^2)*cos(f*x + e) - 2*I*a*sin(f*x + e) + 2*a*sqrt(-(a^2 - b^2)/a^2))*log(-2*a*cos(f*x + e) - 2*I*a*sin(f*x + e) + 2*a*sqrt(-(a^2 - b^2)/a^2) - 2*b) + 3*(2*(a^2*b^3 - b^5)*d^2*f*x + 2*(a^2*b^3 - b^5)*d^2*e + 2*((a^3*b^2 - a*b^4)*d^2*f*x + (a^3*b^2 - a*b^4)*d^2*e)*cos(f*x + e) - (I*(2*a^3*b^2 - a*b^4)*d^2*f^2*x^2 + 2*I*(2*a^3*b^2 - a*b^4)*c*d*f^2*x + 2*I*(2*a^3*b^2 - a*b^4)*c*d*f*e - I*(2*a^3*b^2 - a*b^4)*d^2*e^2 + (I*(2*a^4*b - a^2*b^3)*d^2*f^2*x^2 + 2*I*(2*a^4*b - a^2*b^3)*c*d*f^2*x + 2*I*(2*a^4*b - a^2*b^3)*c*d*f*e - I*(2*a^4*b - a^2*b^3)*d^2*e^2)*cos(f*x + e))*sqrt(-(a^2 - b^2)/a^2))*log((b*cos(f*x + e) + I*b*sin(f*x + e) + (a*cos(f*x + e) + I*a*sin(f*x + e))*sqrt(-(a^2 - b^2)/a^2) + a)/a) + 3*(2*(a^2*b^3 - b^5)*d^2*f*x + 2*(a^2*b^3 - b^5)*d^2*e + 2*((a^3*b^2 - a*b^4)*d^2*f*x + (a^3*b^2 - a*b^4)*d^2*e)*cos(f*x + e) - (-I*(2*a^3*b^2 - a*b^4)*d^2*f^2*x^2 - 2*I*(2*a^3*b^2 - a*b^4)*c*d*f^2*x - 2*I*(2*a^3*b^2 - a*b^4)*...
\end{aligned}$$
Sympy [F]

time = 0.00, size = 0, normalized size = 0.00

$$\int \frac{(c + dx)^2}{(a + b \sec(e + fx))^2} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate((d*x+c)**2/(a+b*sec(f*x+e))**2,x)`
[Out] `Integral((c + d*x)**2/(a + b*sec(e + f*x))**2, x)`

Giac [F]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate((d*x+c)^2/(a+b*sec(f*x+e))^2,x, algorithm="giac")`
[Out] `integrate((d*x + c)^2/(b*sec(f*x + e) + a)^2, x)`

Mupad [F(-1)]

time = 0.00, size = -1, normalized size = -0.00

Hanged

Verification of antiderivative is not currently implemented for this CAS.

[In] `int((c + d*x)^2/(a + b/cos(e + f*x))^2,x)`

[Out] \text{Hanged}

3.41 $\int \frac{c+dx}{(a+b\sec(e+fx))^2} dx$

Optimal. Leaf size=582

$$\frac{(c+dx)^2}{2a^2d} \frac{-ib^3(c+dx) \log \left(1 + \frac{ae^{i(e+fx)}}{b-\sqrt{-a^2+b^2}} \right)}{a^2(-a^2+b^2)^{3/2} f} + \frac{2ib(c+dx) \log \left(1 + \frac{ae^{i(e+fx)}}{b-\sqrt{-a^2+b^2}} \right)}{a^2\sqrt{-a^2+b^2} f} + \frac{ib^3(c+dx) \log \left(1 + \frac{ae^{i(e+fx)}}{b+\sqrt{-a^2+b^2}} \right)}{a^2(-a^2+b^2)^{3/2} f}$$

[Out] $1/2*(d*x+c)^2/a^2/d+b^2*d*ln(b+a*cos(f*x+e))/a^2/(a^2-b^2)/f^2-I*b^3*(d*x+c)*ln(1+a*exp(I*(f*x+e))/(b-(-a^2+b^2)^(1/2)))/a^2/(-a^2+b^2)^(3/2)/f+I*b^3*(d*x+c)*ln(1+a*exp(I*(f*x+e))/(b+(-a^2+b^2)^(1/2)))/a^2/(-a^2+b^2)^(3/2)/f-b^3*d*polylog(2,-a*exp(I*(f*x+e))/(b-(-a^2+b^2)^(1/2)))/a^2/(-a^2+b^2)^(3/2)/f^2+b^3*d*polylog(2,-a*exp(I*(f*x+e))/(b+(-a^2+b^2)^(1/2)))/a^2/(-a^2+b^2)^(3/2)/f^2+b^2*(d*x+c)*sin(f*x+e)/a/(a^2-b^2)/f/(b+a*cos(f*x+e))+2*I*b*(d*x+c)*ln(1+a*exp(I*(f*x+e))/(b-(-a^2+b^2)^(1/2)))/a^2/f/(-a^2+b^2)^(1/2)-2*I*b*(d*x+c)*ln(1+a*exp(I*(f*x+e))/(b+(-a^2+b^2)^(1/2)))/a^2/f/(-a^2+b^2)^(1/2)+2*b*d*polylog(2,-a*exp(I*(f*x+e))/(b-(-a^2+b^2)^(1/2)))/a^2/f^2/(-a^2+b^2)^(1/2)-2*b*d*polylog(2,-a*exp(I*(f*x+e))/(b+(-a^2+b^2)^(1/2)))/a^2/f^2/(-a^2+b^2)^(1/2)$

Rubi [A]

time = 0.73, antiderivative size = 582, normalized size of antiderivative = 1.00, number of steps used = 21, number of rules used = 9, integrand size = 18, $\frac{\text{number of rules}}{\text{integrand size}} = 0.500$, Rules used = {4276, 3405, 3402, 2296, 2221, 2317, 2438, 2747, 31}

$$\frac{2ib(c+dx)\log\left(1+\frac{ae^{i(e+fx)}}{b-\sqrt{b^2-a^2}}\right)}{a^2f\sqrt{b^2-a^2}} - \frac{2ib(c+dx)\log\left(1+\frac{ae^{i(e+fx)}}{b+\sqrt{b^2-a^2}}\right)}{a^2f\sqrt{b^2-a^2}} + \frac{ib^2(c+dx)\sin(e+fx)}{af(a^2-b^2)(a\cos(e+fx)+b)} + \frac{2bd\text{Li}_2\left(\frac{-ae^{i(e+fx)}}{b+\sqrt{b^2-a^2}}\right)}{a^2f^2\sqrt{b^2-a^2}} - \frac{ib^2(c+dx)\log\left(1+\frac{ae^{i(e+fx)}}{b-\sqrt{b^2-a^2}}\right)}{a^2f^2(a^2-b^2)} + \frac{ib^2(c+dx)\log\left(1+\frac{ae^{i(e+fx)}}{b+\sqrt{b^2-a^2}}\right)}{a^2f^2(a^2-b^2)} - \frac{ib^2\text{Li}_2\left(\frac{-ae^{i(e+fx)}}{b-\sqrt{b^2-a^2}}\right)}{a^2f^2(b^2-a^2)^{3/2}} + \frac{ib^2\text{Li}_2\left(\frac{-ae^{i(e+fx)}}{b+\sqrt{b^2-a^2}}\right)}{a^2f^2(b^2-a^2)^{3/2}} + \frac{(c+dx)^2}{2a^2}$$

Antiderivative was successfully verified.

[In] $\text{Int}[(c+d*x)/(a+b*\text{Sec}[e+f*x])^2, x]$

[Out] $(c+d*x)^2/(2*a^2*d) - (I*b^3*(c+d*x)*Log[1+(a*E^(I*(e+f*x)))/(b-Sqrt[-a^2+b^2])]/(a^2*(-a^2+b^2)^(3/2)*f) + ((2*I)*b*(c+d*x)*Log[1+(a*E^(I*(e+f*x)))/(b-Sqrt[-a^2+b^2])]/(a^2*Sqrt[-a^2+b^2]*f) + (I*b^3*(c+d*x)*Log[1+(a*E^(I*(e+f*x)))/(b+Sqrt[-a^2+b^2])]/(a^2*(-a^2+b^2)^(3/2)*f) - ((2*I)*b*(c+d*x)*Log[1+(a*E^(I*(e+f*x)))/(b+Sqrt[-a^2+b^2])]/(a^2*Sqrt[-a^2+b^2]*f) + (b^2*d*Log[b+a*Cos[e+f*x]])/(a^2*(a^2-b^2)*f^2) - (b^3*d*PolyLog[2,-((a*E^(I*(e+f*x)))/(b-Sqrt[-a^2+b^2]))]/(a^2*(-a^2+b^2)^(3/2)*f^2) + (2*b*d*PolyLog[2,-((a*E^(I*(e+f*x)))/(b+Sqrt[-a^2+b^2]))]/(a^2*(-a^2+b^2)^(3/2)*f^2) - (2*b*d*PolyLog[2,-((a*E^(I*(e+f*x)))/(b+Sqrt[-a^2+b^2]))]/(a^2*Sqrt[-a^2+b^2]*f^2) + (b^2*(c+d*x)*Sin[e+f*x])/((a*(a^2-b^2)*f*(b+a*Cos[e+f*x])))$

Rule 31

```
Int[((a_) + (b_)*(x_))^( -1), x_Symbol] :> Simp[Log[RemoveContent[a + b*x, x]]/b, x] /; FreeQ[{a, b}, x]
```

Rule 2221

```
Int[((((F_)^((g_.)*(e_.) + (f_.)*(x_))))^(n_.)*(c_.) + (d_.)*(x_))^(m_.))/((a_) + (b_)*(F_)^((g_.)*(e_.) + (f_.)*(x_))))^(n_.)), x_Symbol] :> Simp[((c + d*x)^m/(b*f*g*n*Log[F]))*Log[1 + b*((F^(g*(e + f*x)))^n/a)], x] - Dist[d*(m/(b*f*g*n*Log[F])), Int[(c + d*x)^(m - 1)*Log[1 + b*((F^(g*(e + f*x)))^n/a)], x], x] /; FreeQ[{F, a, b, c, d, e, f, g, n}, x] && IGtQ[m, 0]
```

Rule 2296

```
Int[((F_)^(u_)*((f_.) + (g_.)*(x_))^(m_.))/((a_.) + (b_)*(F_)^(u_) + (c_.)*(F_)^(v_)), x_Symbol] :> With[{q = Rt[b^2 - 4*a*c, 2]}, Dist[2*(c/q), Int[(f + g*x)^m*(F^u/(b - q + 2*c*F^u)), x], x] - Dist[2*(c/q), Int[(f + g*x)^m*(F^u/(b + q + 2*c*F^u)), x], x]] /; FreeQ[{F, a, b, c, f, g}, x] && EqQ[v, 2*u] && LinearQ[u, x] && NeQ[b^2 - 4*a*c, 0] && IGtQ[m, 0]
```

Rule 2317

```
Int[Log[(a_) + (b_)*((F_)^((e_.)*(c_.) + (d_.)*(x_))))^(n_.)], x_Symbol] :> Dist[1/(d*e*n*Log[F]), Subst[Int[Log[a + b*x]/x, x], x, (F^(e*(c + d*x)))^n], x] /; FreeQ[{F, a, b, c, d, e, n}, x] && GtQ[a, 0]
```

Rule 2438

```
Int[Log[(c_.)*(d_.) + (e_.)*(x_)^(n_.))]/(x_), x_Symbol] :> Simp[-PolyLog[2, (-c)*e*x^n]/n, x] /; FreeQ[{c, d, e, n}, x] && EqQ[c*d, 1]
```

Rule 2747

```
Int[cos[(e_.) + (f_.)*(x_)]^(p_.)*((a_) + (b_)*sin[(e_.) + (f_.)*(x_)])^(m_.), x_Symbol] :> Dist[1/(b^p*f), Subst[Int[(a + x)^m*(b^2 - x^2)^((p - 1)/2), x], x, b*Sin[e + f*x]], x] /; FreeQ[{a, b, e, f, m}, x] && IntegerQ[(p - 1)/2] && NeQ[a^2 - b^2, 0]
```

Rule 3402

```
Int[((c_.) + (d_.)*(x_))^(m_.)/((a_) + (b_)*sin[(e_.) + Pi*(k_.) + (f_.)*(x_)]), x_Symbol] :> Dist[2, Int[(c + d*x)^m*E^(I*Pi*(k - 1/2))*(E^(I*(e + f*x))/(b + 2*a*E^(I*Pi*(k - 1/2))*E^(I*(e + f*x)) - b*E^(2*I*k*Pi)*E^(2*I*(e + f*x)))), x], x] /; FreeQ[{a, b, c, d, e, f}, x] && IntegerQ[2*k] && NeQ[a^2 - b^2, 0] && IGtQ[m, 0]
```

Rule 3405

```
Int[((c_) + (d_)*(x_))^(m_)/((a_) + (b_)*sin[(e_) + (f_)*(x_)])^2, x_
Symbol] :> Simp[b*(c + d*x)^m*(Cos[e + f*x]/(f*(a^2 - b^2)*(a + b*Sin[e + f
*x]))), x] + (Dist[a/(a^2 - b^2), Int[(c + d*x)^m/(a + b*Sin[e + f*x]), x],
x] - Dist[b*d*(m/(f*(a^2 - b^2))), Int[(c + d*x)^(m - 1)*(Cos[e + f*x]/(a
+ b*Sin[e + f*x])), x], x]) /; FreeQ[{a, b, c, d, e, f}, x] && NeQ[a^2 - b^
2, 0] && IGtQ[m, 0]
```

Rule 4276

```
Int[(csc[(e_) + (f_)*(x_)]*(b_) + (a_))^(n_)*((c_) + (d_)*(x_))^(m_), x_
Symbol] :> Int[ExpandIntegrand[(c + d*x)^m, 1/(Sin[e + f*x]^n/(b + a*Si
n[e + f*x])^n), x], x] /; FreeQ[{a, b, c, d, e, f}, x] && ILtQ[n, 0] && IGt
Q[m, 0]
```

Rubi steps

$$\begin{aligned}
\int \frac{c+dx}{(a+b\sec(e+fx))^2} dx &= \int \left(\frac{c+dx}{a^2} + \frac{b^2(c+dx)}{a^2(b+a\cos(e+fx))^2} - \frac{2b(c+dx)}{a^2(b+a\cos(e+fx))} \right) dx \\
&= \frac{(c+dx)^2}{2a^2d} - \frac{(2b) \int \frac{c+dx}{b+a\cos(e+fx)} dx}{a^2} + \frac{b^2 \int \frac{c+dx}{(b+a\cos(e+fx))^2} dx}{a^2} \\
&= \frac{(c+dx)^2}{2a^2d} + \frac{b^2(c+dx)\sin(e+fx)}{a(a^2-b^2)f(b+a\cos(e+fx))} - \frac{(4b) \int \frac{e^{i(e+fx)}(c+dx)}{a+2be^{i(e+fx)}+ae^{2i(e+fx)}} dx}{a^2} - \\
&= \frac{(c+dx)^2}{2a^2d} + \frac{b^2(c+dx)\sin(e+fx)}{a(a^2-b^2)f(b+a\cos(e+fx))} - \frac{(2b^3) \int \frac{e^{i(e+fx)}(c+dx)}{a+2be^{i(e+fx)}+ae^{2i(e+fx)}} dx}{a^2(a^2-b^2)} \\
&= \frac{(c+dx)^2}{2a^2d} + \frac{2ib(c+dx)\log\left(1+\frac{ae^{i(e+fx)}}{b-\sqrt{-a^2+b^2}}\right)}{a^2\sqrt{-a^2+b^2}f} - \frac{2ib(c+dx)\log\left(1+\frac{ae^{i(e+fx)}}{b+\sqrt{-a^2+b^2}}\right)}{a^2\sqrt{-a^2+b^2}f} \\
&= \frac{(c+dx)^2}{2a^2d} - \frac{ib^3(c+dx)\log\left(1+\frac{ae^{i(e+fx)}}{b-\sqrt{-a^2+b^2}}\right)}{a^2(-a^2+b^2)^{3/2}f} + \frac{2ib(c+dx)\log\left(1+\frac{ae^{i(e+fx)}}{b-\sqrt{-a^2+b^2}}\right)}{a^2\sqrt{-a^2+b^2}f} \\
&= \frac{(c+dx)^2}{2a^2d} - \frac{ib^3(c+dx)\log\left(1+\frac{ae^{i(e+fx)}}{b-\sqrt{-a^2+b^2}}\right)}{a^2(-a^2+b^2)^{3/2}f} + \frac{2ib(c+dx)\log\left(1+\frac{ae^{i(e+fx)}}{b-\sqrt{-a^2+b^2}}\right)}{a^2\sqrt{-a^2+b^2}f}
\end{aligned}$$

Mathematica [A]

time = 9.80, size = 1037, normalized size = 1.78

$$\frac{\text{Complex expression involving } \text{ArcTan}, \text{Log}, \text{Sqrt}, \text{Tan}, \text{PolyLog}, \text{Sec}, \text{Sin}, \text{Cos, and various powers of } a, b, e, f, x.}$$

Warning: Unable to verify antiderivative.

[In] `Integrate[(c + d*x)/(a + b*Sec[e + f*x])^2, x]`

[Out] $\frac{((e + f*x)*(-2*d*e + 2*c*f + d*(e + f*x))*(b + a*\cos[e + f*x])^2*\sec[e + f*x]^2)/(2*a^2*f^2*(a + b*\sec[e + f*x])^2) + ((b + a*\cos[e + f*x])*sec[e + f*x]^2*(b^2*d*e*\sin[e + f*x] - b^2*c*f*\sin[e + f*x] - b^2*d*(e + f*x)*\sin[e + f*x]))/(a*(-a + b)*(a + b)*f^2*(a + b*\sec[e + f*x])^2) + (b*\cos[(e + f*x)/2]^2*(b + a*\cos[e + f*x])*((-2*(2*a^2 - b^2)*(d*e - c*f)*\text{ArcTan}[(\sqrt{a - b}*\tan[(e + f*x)/2])/\sqrt{-a - b}])/(sqrt[-a - b]*\sqrt{a - b}) - b*d*\log[\sec[(e + f*x)/2]^2] + b*d*\log[-((b + a*\cos[e + f*x])*sec[(e + f*x)/2]^2)] - (I*(2*a^2 - b^2)*d*(\log[1 + I*\tan[(e + f*x)/2]]*\log[(I*(\sqrt{a + b} - \sqrt{a - b})*\tan[(e + f*x)/2])]/(\sqrt{a - b} + I*\sqrt{a + b})) - \log[1 - I*\tan[(e + f*x)/2]]*\log[(\sqrt{a + b} - \sqrt{a - b})*\tan[(e + f*x)/2])/(\sqrt{a - b} + \sqrt{a + b})] + \log[1 - I*\tan[(e + f*x)/2]]*\log[(I*(\sqrt{a + b} + \sqrt{a - b})*\tan[(e + f*x)/2])]/(\sqrt{a - b} + I*\sqrt{a + b})] - \log[1 + I*\tan[(e + f*x)/2]]*\log[(\sqrt{a + b} + \sqrt{a - b})*\tan[(e + f*x)/2])/(\sqrt{a - b} + \sqrt{a + b})] - \text{PolyLog}[2, (\sqrt{a - b}*(1 - I*\tan[(e + f*x)/2]))/(\sqrt{a - b} - I*\sqrt{a + b})] + \text{PolyLog}[2, (\sqrt{a - b}*(1 - I*\tan[(e + f*x)/2]))/(\sqrt{a - b} + I*\sqrt{a + b})] - \text{PolyLog}[2, (\sqrt{a - b}*(1 + I*\tan[(e + f*x)/2]))/(\sqrt{a - b} - I*\sqrt{a + b})] + \text{PolyLog}[2, (\sqrt{a - b}*(1 + I*\tan[(e + f*x)/2]))/(\sqrt{a - b} + I*\sqrt{a + b})])]/(\sqrt{a - b}*\sqrt{a + b})*\sec[e + f*x]^2*((2*a^2 - b^2)*(c*f + d*f*x) + a*b*d*\sin[e + f*x])*(\sqrt{a + b} - \sqrt{a - b})*\tan[(e + f*x)/2])*(\sqrt{a + b} + \sqrt{a - b})*\tan[(e + f*x)/2])/(a^2*(a^2 - b^2)*f^2*(a + b*\sec[e + f*x])^2*(-((2*a^2 - b^2)*(d*e - c*f - I*d*\log[1 - I*\tan[(e + f*x)/2]] + I*d*\log[1 + I*\tan[(e + f*x)/2]])) + a*b*d*\sin[e + f*x]))}$

Maple [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 1288 vs. $2(528) = 1056$.

time = 0.72, size = 1289, normalized size = 2.21

method	result
risch	$\frac{dx^2}{2a^2} + \frac{cx}{a^2} + \frac{\frac{ib^3 d \ln\left(\frac{ae^{i(fx+e)}+\sqrt{-a^2+b^2}}{b+\sqrt{-a^2+b^2}}+b\right)e}{a^2(a^2-b^2)f^2\sqrt{-a^2+b^2}} + \frac{2ib^2(dx+c)(be^{i(fx+e)}+a)}{a^2(a^2-b^2)f(ae^{2i(fx+e)}+2be^{i(fx+e)}+a)} - \frac{2b^2d\ln(e^{i(fx+e)})}{a^2(a^2-b^2)f^2} + \frac{b^2}{a^2(a^2-b^2)f^2}}{b^2}$

Verification of antiderivative is not currently implemented for this CAS.

[In] `int((d*x+c)/(a+b*sec(f*x+e))^2, x, method=_RETURNVERBOSE)`

[Out]
$$\begin{aligned} & \frac{1}{2}d*x^2/a^2 + 1/a^2*c*x + I*b^3/a^2/(a^2-b^2)/f^2*d/(-a^2+b^2)^{(1/2)}*\ln((a*exp(I*(f*x+e)) + (-a^2+b^2)^{(1/2)} + b)/(b + (-a^2+b^2)^{(1/2)}))*e + 2*I*b^2*(d*x+c)*(b *exp(I*(f*x+e)) + a)/a^2/(a^2-b^2)/f/(a*exp(2*I*(f*x+e)) + 2*b*exp(I*(f*x+e)) + a) - 2*b^2/a^2/(a^2-b^2)/f^2*d*\ln(exp(I*(f*x+e))) + b^2/a^2/(a^2-b^2)/f^2*d*\ln(a *exp(2*I*(f*x+e)) + 2*b*exp(I*(f*x+e)) + a) - 4*I*b/(a^2-b^2)^{(3/2)}/f^2*d*e*arctan(1/2*(2*a*exp(I*(f*x+e)) + 2*b)/(a^2-b^2)^{(1/2)}) - I*b^3/a^2/(a^2-b^2)/f*d/(-a^2+b^2)^{(1/2)}*\ln((-a*exp(I*(f*x+e)) + (-a^2+b^2)^{(1/2)} - b)/(-b + (-a^2+b^2)^{(1/2)}))*x - 2*I*b/(a^2-b^2)/f^2*d/(-a^2+b^2)^{(1/2)}*\ln((a*exp(I*(f*x+e)) + (-a^2+b^2)^{(1/2)} + b)/(b + (-a^2+b^2)^{(1/2)}))*e + 2*I*b/(a^2-b^2)/f*d/(-a^2+b^2)^{(1/2)}*\ln((-a*exp(I*(f*x+e)) + (-a^2+b^2)^{(1/2)} - b)/(-b + (-a^2+b^2)^{(1/2)}))*x - I*b^3/a^2/(a^2-b^2)/f^2*d/(-a^2+b^2)^{(1/2)}*\ln((-a*exp(I*(f*x+e)) + (-a^2+b^2)^{(1/2)} - b)/(-b + (-a^2+b^2)^{(1/2)}))*e - 2*I*b^3/a^2/(a^2-b^2)^{(3/2)}/f*c*arctan(1/2*(2*a*exp(I*(f*x+e)) + 2*b)/(a^2-b^2)^{(1/2)}) - 2*I*b/(a^2-b^2)/f*d/(-a^2+b^2)^{(1/2)}*\ln((a*exp(I*(f*x+e)) + (-a^2+b^2)^{(1/2)} + b)/(b + (-a^2+b^2)^{(1/2)}))*x + 2*b/(a^2-b^2)/f^2*d/(-a^2+b^2)^{(1/2)}*\text{dilog}((-a*exp(I*(f*x+e)) + (-a^2+b^2)^{(1/2)} - b)/(-b + (-a^2+b^2)^{(1/2)})) - 2*b/(a^2-b^2)/f^2*d/(-a^2+b^2)^{(1/2)}*\text{dilog}((a*exp(I*(f*x+e)) + (-a^2+b^2)^{(1/2)} + b)/(b + (-a^2+b^2)^{(1/2)})) + 2*I*b^3/a^2/(a^2-b^2)^{(3/2)}/f^2*d*e*arctan(1/2*(2*a*exp(I*(f*x+e)) + 2*b)/(a^2-b^2)^{(1/2)}) + 2*I*b/(a^2-b^2)/f^2*d/(-a^2+b^2)^{(1/2)}*\ln((-a*exp(I*(f*x+e)) + (-a^2+b^2)^{(1/2)} - b)/(-b + (-a^2+b^2)^{(1/2)}))*e + 4*I*b/(a^2-b^2)^{(3/2)}/f*c*arctan(1/2*(2*a*exp(I*(f*x+e)) + 2*b)/(a^2-b^2)^{(1/2)}) + I*b^3/a^2/(a^2-b^2)/f*d/(-a^2+b^2)^{(1/2)}*\ln((a*exp(I*(f*x+e)) + (-a^2+b^2)^{(1/2)} + b)/(b + (-a^2+b^2)^{(1/2)}))*x - b^3/a^2/(a^2-b^2)/f^2*d/(-a^2+b^2)^{(1/2)}*\text{dilog}((-a*exp(I*(f*x+e)) + (-a^2+b^2)^{(1/2)} - b)/(-b + (-a^2+b^2)^{(1/2)})) + b^3/a^2/(a^2-b^2)/f^2*d/(-a^2+b^2)^{(1/2)}*\text{dilog}((a*exp(I*(f*x+e)) + (-a^2+b^2)^{(1/2)} + b)/(b + (-a^2+b^2)^{(1/2)})) \end{aligned}$$

Maxima [F(-2)]

time = 0.00, size = 0, normalized size = 0.00

Exception raised: ValueError

Verification of antiderivative is not currently implemented for this CAS.

[In] integrate((d*x+c)/(a+b*sec(f*x+e))^2,x, algorithm="maxima")

[Out] Exception raised: ValueError >> Computation failed since Maxima requested additional constraints; using the 'assume' command before evaluation *may* help (example of legal syntax is 'assume(4*a^2-4*b^2>0)', see 'assume?' for more de

Fricas [B] Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal. 2155 vs. 2(531) = 1062.

time = 3.61, size = 2155, normalized size = 3.70

Too large to display

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate((d*x+c)/(a+b*sec(f*x+e))^2,x, algorithm="fricas")
[Out] 1/2*((a^4*b - 2*a^2*b^3 + b^5)*d*f^2*x^2 + 2*(a^4*b - 2*a^2*b^3 + b^5)*c*f^2*x - ((2*a^4*b - a^2*b^3)*d*cos(f*x + e) + (2*a^3*b^2 - a*b^4)*d)*sqrt(-(a^2 - b^2)/a^2)*dilog(-(b*cos(f*x + e) + I*b*sin(f*x + e) + (a*cos(f*x + e) + I*a*sin(f*x + e))*sqrt(-(a^2 - b^2)/a^2) + a)/a + 1) + ((2*a^4*b - a^2*b^3)*d*cos(f*x + e) + (2*a^3*b^2 - a*b^4)*d)*sqrt(-(a^2 - b^2)/a^2)*dilog(-(b*cos(f*x + e) + I*b*sin(f*x + e) - (a*cos(f*x + e) + I*a*sin(f*x + e)))*sqrt(-(a^2 - b^2)/a^2) + a)/a + 1) - ((2*a^4*b - a^2*b^3)*d*cos(f*x + e) + (2*a^3*b^2 - a*b^4)*d)*sqrt(-(a^2 - b^2)/a^2)*dilog(-(b*cos(f*x + e) - I*b*sin(f*x + e) + (a*cos(f*x + e) - I*a*sin(f*x + e)))*sqrt(-(a^2 - b^2)/a^2) + a)/a + 1) + ((2*a^4*b - a^2*b^3)*d*cos(f*x + e) + (2*a^3*b^2 - a*b^4)*d)*sqrt(-(a^2 - b^2)/a^2)*dilog(-(b*cos(f*x + e) - I*b*sin(f*x + e) - (a*cos(f*x + e) - I*a*sin(f*x + e)))*sqrt(-(a^2 - b^2)/a^2) + a)/a + 1) + ((2*a^4*b - a^2*b^3)*d*cos(f*x + e) + (2*a^3*b^2 - a*b^4)*d)*sqrt(-(a^2 - b^2)/a^2)*dilog(-(b*cos(f*x + e) - I*b*sin(f*x + e) - (a*cos(f*x + e) - I*a*sin(f*x + e)))*sqrt(-(a^2 - b^2)/a^2) + a)/a + 1) + (-I*(2*a^3*b^2 - a*b^4)*d*f*x - I*(2*a^3*b^2 - a*b^4)*d*e + (-I*(2*a^4*b - a^2*b^3)*d*f*x - I*(2*a^4*b - a^2*b^3)*d*e)*cos(f*x + e))*sqrt(-(a^2 - b^2)/a^2)*log((b*cos(f*x + e) + I*b*sin(f*x + e) + (a*cos(f*x + e) + I*a*sin(f*x + e)))*sqrt(-(a^2 - b^2)/a^2) + a)/a) + (I*(2*a^3*b^2 - a*b^4)*d*f*x + I*(2*a^3*b^2 - a*b^4)*d*e)*cos(f*x + e))*sqrt(-(a^2 - b^2)/a^2)*log((b*cos(f*x + e) + I*b*sin(f*x + e) - (a*cos(f*x + e) + I*a*sin(f*x + e)))*sqrt(-(a^2 - b^2)/a^2) + a)/a) + (I*(2*a^3*b^2 - a*b^4)*d*f*x + I*(2*a^4*b - a^2*b^3)*d*e)*cos(f*x + e))*sqrt(-(a^2 - b^2)/a^2)*log((b*cos(f*x + e) + I*b*sin(f*x + e) - (a*cos(f*x + e) - I*a*sin(f*x + e)))*sqrt(-(a^2 - b^2)/a^2) + a)/a) + (-I*(2*a^3*b^2 - a*b^4)*d*f*x - I*(2*a^3*b^2 - a*b^4)*d*e + (-I*(2*a^4*b - a^2*b^3)*d*f*x - I*(2*a^4*b - a^2*b^3)*d*e)*cos(f*x + e))*sqrt(-(a^2 - b^2)/a^2)*log((b*cos(f*x + e) - I*b*sin(f*x + e) - (a*cos(f*x + e) - I*a*sin(f*x + e)))*sqrt(-(a^2 - b^2)/a^2) + a)/a) + ((a^5 - 2*a^3*b^2 + a*b^4)*d*f^2*x^2 + 2*(a^5 - 2*a^3*b^2 + a*b^4)*c*f^2*x)*cos(f*x + e) + ((a^3*b^2 - a*b^4)*d*cos(f*x + e) + (a^2*b^3 - b^5)*d + (I*(2*a^3*b^2 - a*b^4)*c*f - I*(2*a^3*b^2 - a*b^4)*d*e + (I*(2*a^4*b - a^2*b^3)*c*f - I*(2*a^4*b - a^2*b^3)*d*e)*cos(f*x + e))*sqrt(-(a^2 - b^2)/a^2))*log(2*a*cos(f*x + e) + 2*I*a*sin(f*x + e) + 2*a*sqrt(-(a^2 - b^2)/a^2) + 2*b) + ((a^3*b^2 - a*b^4)*d*cos(f*x + e) + (a^2*b^3 - b^5)*d + (-I*(2*a^3*b^2 - a*b^4)*c*f + I*(2*a^3*b^2 - a*b^4)*d*e)*cos(f*x + e))*sqrt(-(a^2 - b^2)/a^2))*log(2*a*cos(f*x + e) - 2*I*a*sin(f*x + e) + 2*a*sqrt(-(a^2 - b^2)/a^2) + 2*b) + ((a^3*b^2 - a*b^4)*d*cos(f*x + e) + (a^2*b^3 - b^5)*d + (I*(2*a^3*b^2 - a*b^4)*c*f - I*(2*a^4*b - a^2*b^3)*d*e)*cos(f*x + e))*sqrt(-(a^2 - b^2)/a^2))*log(-2*a*cos(f*x + e) + 2*I*a*sin(f*x + e) + 2*a*sqrt(-(a^2 - b^2)/a^2) - 2*b) + ((a^3*b^2 - a*b^4)*d*cos(f*x + e) + (a^2*b^3 - b^5)*d + (-I*(2*a^3*b^2 - a*b^4)*c*f + I*(2*a^3*b^2 - a*b^4)*d*e)*sqrt(-(a^2 - b^2)/a^2))*log(-2*a*cos(f*x + e) - 2*I*a*sin(f*x + e) + 2*a*sqrt(-(a^2 - b^2)/a^2) - 2*b) + 2*((a^3*b^2 - a*b^4)*d*f*x + (a^3*b^2 - a*b^4)*d*f*x + 2*a*sqrt(-(a^2 - b^2)/a^2) - 2*b)
```

$$\frac{a^6 b^2 - 2 a^4 b^3 + a^2 b^5}{(a^7 - 2 a^5 b^2 + a^3 b^4) f^2 \cos(f x + e) + (a^6 b - 2 a^4 b^3 + a^2 b^5) f^2}$$
Sympy [F]

time = 0.00, size = 0, normalized size = 0.00

$$\int \frac{c + dx}{(a + b \sec(e + fx))^2} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate((d*x+c)/(a+b*sec(f*x+e))**2,x)`
 [Out] `Integral((c + d*x)/(a + b*sec(e + f*x))**2, x)`

Giac [F]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate((d*x+c)/(a+b*sec(f*x+e))**2,x, algorithm="giac")`
 [Out] `integrate((d*x + c)/(b*sec(f*x + e) + a)**2, x)`

Mupad [F(-1)]

time = 0.00, size = -1, normalized size = -0.00

Hanged

Verification of antiderivative is not currently implemented for this CAS.

[In] `int((c + d*x)/(a + b/cos(e + f*x))**2,x)`
 [Out] `\text{Hanged}`

3.42 $\int \frac{1}{(c+dx)(a+b\sec(e+fx))^2} dx$

Optimal. Leaf size=23

$$\text{Int}\left(\frac{1}{(c+dx)(a+b\sec(e+fx))^2}, x\right)$$

[Out] Unintegrable(1/(d*x+c)/(a+b*sec(f*x+e))^2,x)

Rubi [A]

time = 0.04, antiderivative size = 0, normalized size of antiderivative = 0.00, number of steps used = 0, number of rules used = 0, integrand size = 0, $\frac{\text{number of rules}}{\text{integrand size}} = 0.000$, Rules used = {}

$$\int \frac{1}{(c+dx)(a+b\sec(e+fx))^2} dx$$

Verification is not applicable to the result.

[In] Int[1/((c + d*x)*(a + b*Sec[e + f*x])^2),x]

[Out] Defer[Int][1/((c + d*x)*(a + b*Sec[e + f*x])^2), x]

Rubi steps

$$\int \frac{1}{(c+dx)(a+b\sec(e+fx))^2} dx = \int \frac{1}{(c+dx)(a+b\sec(e+fx))^2} dx$$

Mathematica [A]

time = 28.36, size = 0, normalized size = 0.00

$$\int \frac{1}{(c+dx)(a+b\sec(e+fx))^2} dx$$

Verification is not applicable to the result.

[In] Integrate[1/((c + d*x)*(a + b*Sec[e + f*x])^2),x]

[Out] Integrate[1/((c + d*x)*(a + b*Sec[e + f*x])^2), x]

Maple [A]

time = 0.28, size = 0, normalized size = 0.00

$$\int \frac{1}{(dx+c)(a+b\sec(fx+e))^2} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\int \frac{1}{(dx+c)/(a+b\sec(fx+e))^2} dx$

[Out] $\int \frac{1}{(dx+c)/(a+b\sec(fx+e))^2} dx$

Maxima [A]

time = 0.00, size = 0, normalized size = 0.00

Failed to integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}(1/(dx+c)/(a+b\sec(fx+e))^2, x, \text{algorithm}=\text{"maxima"})$

[Out]
$$\begin{aligned} & (2*a*b^3*d*\sin(fx + e) + ((a^4 - a^2*b^2)*d*f*x + (a^4 - a^2*b^2)*c*f)*\cos(2*f*x + 2*e)^2*\log(dx + c) + 4*((a^2*b^2 - b^4)*d*f*x + (a^2*b^2 - b^4)*c*f)*\cos(fx + e)^2*\log(dx + c) + ((a^4 - a^2*b^2)*d*f*x + (a^4 - a^2*b^2)*c*f)*\log(dx + c)*\sin(2*f*x + 2*e)^2 + 4*((a^2*b^2 - b^4)*d*f*x + (a^2*b^2 - b^4)*c*f)*\log(dx + c)*\sin(fx + e)^2 + 4*((a^3*b - a*b^3)*d*f*x + (a^3*b - a*b^3)*c*f)*\cos(fx + e)*\log(dx + c) - 2*(a*b^3*d*\sin(fx + e) - 2*((a^3*b - a*b^3)*d*f*x + (a^3*b - a*b^3)*c*f)*\cos(fx + e)*\log(dx + c) - ((a^4 - a^2*b^2)*d*f*x + (a^4 - a^2*b^2)*c*f)*\log(dx + c))*\cos(2*f*x + 2*e) - ((a^6 - a^4*b^2)*d^2*f*x + (a^6 - a^4*b^2)*c*d*f + ((a^6 - a^4*b^2)*d^2*f*x + (a^6 - a^4*b^2)*c*d*f)*\cos(2*f*x + 2*e)^2 + 4*((a^4*b^2 - a^2*b^4)*d^2*f*x + (a^4*b^2 - a^2*b^4)*c*d*f)*\sin(2*f*x + 2*e)^2 + 4*((a^5*b - a^3*b^3)*d^2*f*x + (a^5*b - a^3*b^3)*c*d*f)*\sin(2*f*x + 2*e)*\sin(fx + e) + 4*((a^4*b^2 - a^2*b^4)*d^2*f*x + (a^4*b^2 - a^2*b^4)*c*d*f)*\sin(fx + e)^2 + 2*((a^6 - a^4*b^2)*d^2*f*x + (a^6 - a^4*b^2)*c*d*f + 2*((a^5*b - a^3*b^3)*d^2*f*x + (a^5*b - a^3*b^3)*c*d*f)*\cos(fx + e))*\cos(2*f*x + 2*e) + 4*((a^5*b - a^3*b^3)*d^2*f*x + (a^5*b - a^3*b^3)*c*d*f)*\cos(fx + e)^2 + ((2*a^2*b^2 - b^4)*d*f*x + (2*a^2*b^2 - b^4)*c*f)*\cos(fx + e)^2 - 2*((2*a^2*b^2 - b^4)*d*f*x + (2*a^2*b^2 - b^4)*c*f)*\sin(fx + e)^2 - (a*b^3*d*\sin(fx + e) + ((2*a^3*b - a*b^3)*d*f*x + (2*a^3*b - a*b^3)*c*f)*\cos(fx + e))*\cos(2*f*x + 2*e) - ((2*a^3*b - a*b^3)*d*f*x + (2*a^3*b - a*b^3)*c*f)*\cos(fx + e) + (a*b^3*d*\cos(fx + e) + a^2*b^2*d - ((2*a^3*b - a*b^3)*d*f*x + (2*a^3*b - a*b^3)*c*f)*\sin(2*f*x + 2*e))/((a^6 - a^4*b^2)*d^2*f*x^2 + 2*(a^6 - a^4*b^2)*c*d*f*x + (a^6 - a^4*b^2)*c^2*f + ((a^6 - a^4*b^2)*d^2*f*x^2 + 2*(a^6 - a^4*b^2)*c*d*f*x + (a^6 - a^4*b^2)*c^2*f)*\cos(2*f*x + 2*e)^2 + 4*((a^4*b^2 - a^2*b^4)*d^2*f*x^2 + 2*(a^4*b^2 - a^2*b^4)*c*d*f*x + (a^4*b^2 - a^2*b^4)*c^2*f)*\cos(fx + e)^2 + ((a^6 - a^4*b^2)*d^2*f*x^2 + 2*(a^6 - a^4*b^2)*c*d*f*x + (a^6 - a^4*b^2)*c^2*f)*\sin(2*f*x + 2*e)^2 + 4*((a^5*b - a^3*b^3)*d^2*f*x^2 + 2*(a^5*b - a^3*b^3)*c*d*f*x + (a^5*b - a^3*b^3)*c^2*f)*\sin(2*f*x + 2*e)*\sin(fx + e) + 4*((a^4*b^2 - a^2*b^4)*d^2*f*x^2 + 2*(a^4*b^2 - a^2*b^4)*c*d*f*x + (a^4*b^2 - a^2*b^4)*c^2*f)*\sin(fx + e)^2 + 2*((a^6 - a^4*b^2)*d^2*f*x^2 + 2*(a^6 - a^4*b^2)*c*d*f*x + (a^6 - a^4*b^2)*c^2*f) + 2*((a^5*b - a^3*b^3)*d^2*f*x^2 + 2*(a^5*b - a^3*b^3)*c*d*f*x + (a^5*b - a^3*b^3)*c^2*f)*\cos(fx + e)^2 + 2*(a^5*b - a^3*b^3)*c*d*f*x + (a^5*b - a^3*b^3)*c^2*f)*\cos(fx + e) + 4*((a^5*b - a^3*b^3)*c*d*f*x + (a^5*b - a^3*b^3)*c^2*f)*\cos(fx + e)^2 + 4*((a^5*b - a^3*b^3)*c*d*f*x + (a^5*b - a^3*b^3)*c^2*f)*\cos(fx + e)) \end{aligned}$$

$$\begin{aligned}
& -a^3b^3)d^2f*x^2 + 2*(a^5b - a^3b^3)*c*d*f*x + (a^5b - a^3b^3)*c^2*f*\cos(f*x + e)), x) + ((a^4 - a^2b^2)*d*f*x + (a^4 - a^2b^2)*c*f)*\log(d*x + c) + 2*(a*b^3*d*\cos(f*x + e) + a^2b^2*d + 2*((a^3b - a*b^3)*d*f*x + (a^3b - a*b^3)*c*f)*\log(d*x + c)*\sin(f*x + e))*\sin(2*f*x + 2*e))/((a^6 - a^4b^2)*d^2f*x + (a^6 - a^4b^2)*c*d*f + ((a^6 - a^4b^2)*d^2f*x + (a^6 - a^4b^2)*c*d*f)*\cos(2*f*x + 2*e))^2 + 4*((a^4b^2 - a^2b^4)*d^2f*x + (a^4b^2 - a^2b^4)*c*d*f)*\cos(f*x + e)^2 + ((a^6 - a^4b^2)*d^2f*x + (a^6 - a^4b^2)*c*d*f)*\sin(2*f*x + 2*e)^2 + 4*((a^5b - a^3b^3)*d^2f*x + (a^5b - a^3b^3)*c*d*f)*\sin(2*f*x + 2*e)*\sin(f*x + e) + 4*((a^4b^2 - a^2b^4)*d^2f*x + (a^4b^2 - a^2b^4)*c*d*f)*\sin(f*x + e)^2 + 2*((a^6 - a^4b^2)*d^2f*x + (a^6 - a^4b^2)*c*d*f + 2*((a^5b - a^3b^3)*d^2f*x + (a^5b - a^3b^3)*c*d*f)*\cos(f*x + e))*\cos(2*f*x + 2*e) + 4*((a^5b - a^3b^3)*d^2f*x + (a^5b - a^3b^3)*c*d*f)*\cos(f*x + e))
\end{aligned}$$
Fricas [A]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate(1/(d*x+c)/(a+b*sec(f*x+e))^2,x, algorithm="fricas")`[Out] `integral(1/(a^2*d*x + a^2*c + (b^2*d*x + b^2*c)*sec(f*x + e)^2 + 2*(a*b*d*x + a*b*c)*sec(f*x + e)), x)`**Sympy [A]**

time = 0.00, size = 0, normalized size = 0.00

$$\int \frac{1}{(a + b \sec(e + fx))^2 (c + dx)} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate(1/(d*x+c)/(a+b*sec(f*x+e))**2,x)`[Out] `Integral(1/((a + b*sec(e + fx))**2*(c + d*x)), x)`**Giac [A]**

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] `integrate(1/(d*x+c)/(a+b*sec(f*x+e))^2,x, algorithm="giac")`[Out] `integrate(1/((d*x + c)*(b*sec(f*x + e) + a)^2), x)`

Mupad [A]

time = 0.00, size = -1, normalized size = -0.04

$$\int \frac{1}{\left(a + \frac{b}{\cos(e+fx)}\right)^2 (c + dx)} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] int(1/((a + b/cos(e + f*x))^2*(c + d*x)),x)

[Out] int(1/((a + b/cos(e + f*x))^2*(c + d*x)), x)

3.43 $\int \frac{1}{(c+dx)^2(a+b\sec(e+fx))^2} dx$

Optimal. Leaf size=23

$$\text{Int}\left(\frac{1}{(c+dx)^2(a+b\sec(e+fx))^2}, x\right)$$

[Out] Unintegrable(1/(d*x+c)^2/(a+b*sec(f*x+e))^2,x)

Rubi [A]

time = 0.04, antiderivative size = 0, normalized size of antiderivative = 0.00, number of steps used = 0, number of rules used = 0, integrand size = 0, $\frac{\text{number of rules}}{\text{integrand size}} = 0.000$, Rules used = {}

$$\int \frac{1}{(c+dx)^2(a+b\sec(e+fx))^2} dx$$

Verification is not applicable to the result.

[In] Int[1/((c + d*x)^2*(a + b*Sec[e + f*x])^2),x]

[Out] Defer[Int][1/((c + d*x)^2*(a + b*Sec[e + f*x])^2), x]

Rubi steps

$$\int \frac{1}{(c+dx)^2(a+b\sec(e+fx))^2} dx = \int \frac{1}{(c+dx)^2(a+b\sec(e+fx))^2} dx$$

Mathematica [A]

time = 44.52, size = 0, normalized size = 0.00

$$\int \frac{1}{(c+dx)^2(a+b\sec(e+fx))^2} dx$$

Verification is not applicable to the result.

[In] Integrate[1/((c + d*x)^2*(a + b*Sec[e + f*x])^2),x]

[Out] Integrate[1/((c + d*x)^2*(a + b*Sec[e + f*x])^2), x]

Maple [A]

time = 0.30, size = 0, normalized size = 0.00

$$\int \frac{1}{(dx+c)^2(a+b\sec(fx+e))^2} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\int \frac{1}{(dx+c)^2(a+b\sec(fx+e))^2} dx$
[Out] $\int \frac{1}{(dx+c)^2(a+b\sec(fx+e))^2} dx$

Maxima [A]

time = 0.00, size = 0, normalized size = 0.00

Failed to integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}(1/(dx+c)^2(a+b\sec(fx+e))^2, x, \text{algorithm}=\text{"maxima"})$
[Out]
$$\begin{aligned} & (2*a*b^3*d*\sin(fx + e) - (a^4 - a^2*b^2)*d*f*x - (a^4 - a^2*b^2)*c*f - ((a^4 - a^2*b^2)*d*f*x + (a^4 - a^2*b^2)*c*f)*\cos(2*fx + 2*e)^2 - 4*((a^2*b^2 - b^4)*d*f*x + (a^2*b^2 - b^4)*c*f)*\cos(fx + e)^2 - ((a^4 - a^2*b^2)*d*f*x + (a^4 - a^2*b^2)*c*f)*\sin(2*fx + 2*e)^2 - 4*((a^2*b^2 - b^4)*d*f*x + (a^2*b^2 - b^4)*c*f)*\sin(fx + e)^2 - 2*(a*b^3*d*\sin(fx + e) + (a^4 - a^2*b^2)*d*f*x + (a^4 - a^2*b^2)*c*f + 2*((a^3*b - a*b^3)*d*f*x + (a^3*b - a*b^3)*c*f)*\cos(fx + e))\cos(2*fx + 2*e) - 4*((a^3*b - a*b^3)*d*f*x + (a^3*b - a*b^3)*c*f)*\cos(fx + e) - ((a^6 - a^4*b^2)*d^3*f*x^2 + 2*(a^6 - a^4*b^2)*c*d^2*f*x + (a^6 - a^4*b^2)*c^2*d*f + ((a^6 - a^4*b^2)*d^3*f*x^2 + 2*(a^6 - a^4*b^2)*c*d^2*f*x + (a^6 - a^4*b^2)*c^2*d*f)\cos(2*fx + 2*e)^2 + 4*((a^4*b^2 - a^2*b^4)*d^3*f*x^2 + 2*(a^4*b^2 - a^2*b^4)*c*d^2*f*x + (a^4*b^2 - a^2*b^4)*c^2*d*f)\cos(2*fx + 2*e)^2 + 4*((a^4*b^2 - a^2*b^4)*d^3*f*x^2 + 2*(a^4*b^2 - a^2*b^4)*c*d^2*f*x + (a^4*b^2 - a^2*b^4)*c^2*d*f)\cos(fx + e)^2 + ((a^6 - a^4*b^2)*d^3*f*x^2 + 2*(a^6 - a^4*b^2)*c*d^2*f*x + (a^6 - a^4*b^2)*c^2*d*f)\sin(2*fx + 2*e)^2 + 4*((a^5*b - a^3*b^3)*d^3*f*x^2 + 2*(a^5*b - a^3*b^3)*c*d^2*f*x + (a^5*b - a^3*b^3)*c^2*d*f)\sin(2*fx + 2*e)^2 + 4*((a^4*b^2 - a^2*b^4)*c*d^2*f*x + (a^4*b^2 - a^2*b^4)*c^2*d*f)\sin(fx + e)^2 + 2*((a^6 - a^4*b^2)*d^3*f*x^2 + 2*(a^6 - a^4*b^2)*c*d^2*f*x + (a^6 - a^4*b^2)*c^2*d*f)\sin(fx + e)^2 + 2*((a^5*b - a^3*b^3)*d^3*f*x^2 + 2*(a^5*b - a^3*b^3)*c*d^2*f*x + (a^5*b - a^3*b^3)*c^2*d*f)\cos(2*fx + 2*e)^2 + 4*((a^5*b - a^3*b^3)*d^3*f*x^2 + 2*(a^5*b - a^3*b^3)*c*d^2*f*x + (a^5*b - a^3*b^3)*c^2*d*f)\cos(fx + e)^2 + ((2*a^3*b - a*b^3)*d*f*x + (2*a^3*b - a*b^3)*c*f)\cos(fx + e)\cos(2*fx + 2*e) - ((2*a^3*b - a*b^3)*d*f*x + (2*a^3*b - a*b^3)*c*f)\cos(fx + e)\cos(2*fx + 2*e) - ((2*a^3*b - a*b^3)*d*f*x + (2*a^3*b - a*b^3)*c*f)\cos(fx + e)\cos(2*fx + 2*e))/((a^6 - a^4*b^2)*d^3*f*x^3 + 3*(a^6 - a^4*b^2)*c*d^2*f*x^2 + (a^6 - a^4*b^2)*c^3*f + ((a^6 - a^4*b^2)*d^3*f*x^3 + 3*(a^6 - a^4*b^2)*c*d^2*f*x^2 + 3*(a^6 - a^4*b^2)*c^2*d*f*x + (a^6 - a^4*b^2)*c^3*f)\cos(2*fx + 2*e)^2 + 4*((a^4*b^2 - a^2*b^4)*d^3*f*x^3 + 3*(a^4*b^2 - a^2*b^4)*c*d^2*f*x^2 + 3*(a^4*b^2 - a^2*b^4)*c^2*d*f*x + (a^4*b^2 - a^2*b^4)*c^3*f)\cos(fx + e)^2 + ((a^6 - a^4*b^2)*d^3*f*x^3 + 3*(a^6 - a^4*b^2)*c*d^2*f*x^2 + 3*(a^6 - a^4*b^2)*c^2*d*f*x + (a^6 - a^4*b^2)*c^3*f)\sin(2*fx + 2*e)^2 + 4*((a^5*b - a^3*b^3)*d^3*f*x^2 + 2*(a^5*b - a^3*b^3)*c*d^2*f*x + (a^5*b - a^3*b^3)*c^2*d*f)\sin(fx + e)^2 + 4*((a^5*b - a^3*b^3)*d^3*f*x^2 + 2*(a^5*b - a^3*b^3)*c*d^2*f*x + (a^5*b - a^3*b^3)*c^2*d*f)\sin(fx + e)^2) \end{aligned}$$

$$\begin{aligned}
& *f*x^3 + 3*(a^5*b - a^3*b^3)*c*d^2*f*x^2 + 3*(a^5*b - a^3*b^3)*c^2*d*f*x + \\
& (a^5*b - a^3*b^3)*c^3*f)*sin(2*f*x + 2*e)*sin(f*x + e) + 4*((a^4*b^2 - a^2*b^4)*d^3*f*x^3 + 3*(a^4*b^2 - a^2*b^4)*c*d^2*f*x^2 + 3*(a^4*b^2 - a^2*b^4)*c^2*d*f*x + (a^4*b^2 - a^2*b^4)*c^3*f)*sin(f*x + e)^2 + 2*((a^6 - a^4*b^2)*d^3*f*x^3 + 3*(a^6 - a^4*b^2)*c*d^2*f*x^2 + 3*(a^6 - a^4*b^2)*c^2*d*f*x + (a^6 - a^4*b^2)*c^3*f + 2*((a^5*b - a^3*b^3)*d^3*f*x^3 + 3*(a^5*b - a^3*b^3)*c*d^2*f*x^2 + 3*(a^5*b - a^3*b^3)*c^2*d*f*x + (a^5*b - a^3*b^3)*c^3*f + 2*((a^5*b - a^3*b^3)*d^3*f*x^3 + 3*(a^5*b - a^3*b^3)*c*d^2*f*x^2 + 3*(a^5*b - a^3*b^3)*c^2*d*f*x + (a^5*b - a^3*b^3)*c^3*f)*cos(f*x + e))*cos(2*f*x + 2*e) + 4*((a^5*b - a^3*b^3)*d^3*f*x^3 + 3*(a^5*b - a^3*b^3)*c*d^2*f*x^2 + 3*(a^5*b - a^3*b^3)*c^2*d*f*x + (a^5*b - a^3*b^3)*c^3*f)*cos(f*x + e)), x) + 2*(a*b^3*d*cos(f*x + e) + a^2*b^2*d - 2*((a^3*b - a*b^3)*d*f*x + (a^3*b - a*b^3)*c*f)*sin(f*x + e))*sin(2*f*x + 2*e))/((a^6 - a^4*b^2)*d^3*f*x^2 + 2*(a^6 - a^4*b^2)*c*d^2*f*x + (a^6 - a^4*b^2)*c^2*d*f + ((a^6 - a^4*b^2)*d^3*f*x^2 + 2*(a^6 - a^4*b^2)*c*d^2*f*x + (a^6 - a^4*b^2)*c^2*d*f)*cos(2*f*x + 2*e)^2 + 4*((a^4*b^2 - a^2*b^4)*d^3*f*x^2 + 2*(a^4*b^2 - a^2*b^4)*c*d^2*f*x + (a^4*b^2 - a^2*b^4)*c^2*d*f)*cos(f*x + e)^2 + ((a^6 - a^4*b^2)*d^3*f*x^2 + 2*(a^6 - a^4*b^2)*c*d^2*f*x + (a^6 - a^4*b^2)*c^2*d*f)*sin(2*f*x + 2*e)^2 + 4*((a^5*b - a^3*b^3)*d^3*f*x^2 + 2*(a^5*b - a^3*b^3)*c*d^2*f*x + (a^5*b - a^3*b^3)*c^2*d*f)*sin(2*f*x + 2*e)*sin(f*x + e) + 4*((a^4*b^2 - a^2*b^4)*d^3*f*x^2 + 2*(a^4*b^2 - a^2*b^4)*c*d^2*f*x + (a^4*b^2 - a^2*b^4)*c^2*d*f)*sin(f*x + e)^2 + 2*((a^6 - a^4*b^2)*d^3*f*x^2 + 2*(a^6 - a^4*b^2)*c*d^2*f*x + (a^6 - a^4*b^2)*c^2*d*f)*cos(f*x + e)) + 4*((a^5*b - a^3*b^3)*d^3*f*x^2 + 2*(a^5*b - a^3*b^3)*c*d^2*f*x + (a^5*b - a^3*b^3)*c^2*d*f)*cos(f*x + e))
\end{aligned}$$
Fricas [A]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate(1/(d*x+c)^2/(a+b*sec(f*x+e))^2,x, algorithm="fricas")
[Out] integral(1/(a^2*d^2*x^2 + 2*a^2*c*d*x + a^2*c^2 + (b^2*d^2*x^2 + 2*b^2*c*d*x + b^2*c^2)*sec(f*x + e))^2 + 2*(a*b*d^2*x^2 + 2*a*b*c*d*x + a*b*c^2)*sec(f*x + e)), x)
```

Sympy [A]

time = 0.00, size = 0, normalized size = 0.00

$$\int \frac{1}{(a + b \sec(e + fx))^2 (c + dx)^2} dx$$

Verification of antiderivative is not currently implemented for this CAS.

```
[In] integrate(1/(d*x+c)**2/(a+b*sec(f*x+e))**2,x)
```

[Out] $\text{Integral}(1/((a + b*\sec(e + f*x))^{**2}*(c + d*x)^{**2}), x)$

Giac [A]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}(1/(d*x+c)^{**2}/(a+b*\sec(f*x+e))^{**2}, x, \text{algorithm}=\text{"giac"})$

[Out] $\text{integrate}(1/((d*x + c)^{**2}*(b*\sec(f*x + e) + a)^{**2}), x)$

Mupad [A]

time = 0.00, size = -1, normalized size = -0.04

$$\int \frac{1}{\left(a + \frac{b}{\cos(e+f x)}\right)^2 (c + d x)^2} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{int}(1/((a + b/\cos(e + f*x))^{**2}*(c + d*x)^{**2}), x)$

[Out] $\text{int}(1/((a + b/\cos(e + f*x))^{**2}*(c + d*x)^{**2}), x)$

3.44 $\int (c + dx)^m (a + b \sec(e + fx))^n dx$

Optimal. Leaf size=23

$$\text{Int}((c + dx)^m (a + b \sec(e + fx))^n, x)$$

[Out] Unintegrable((d*x+c)^m*(a+b*sec(f*x+e))^n,x)

Rubi [A]

time = 0.03, antiderivative size = 0, normalized size of antiderivative = 0.00, number of steps used = 0, number of rules used = 0, integrand size = 0, $\frac{\text{number of rules}}{\text{integrand size}}$ = 0.000, Rules used = {}

$$\int (c + dx)^m (a + b \sec(e + fx))^n dx$$

Verification is not applicable to the result.

[In] Int[(c + d*x)^m*(a + b*Sec[e + f*x])^n,x]

[Out] Defer[Int][(c + d*x)^m*(a + b*Sec[e + f*x])^n, x]

Rubi steps

$$\int (c + dx)^m (a + b \sec(e + fx))^n dx = \int (c + dx)^m (a + b \sec(e + fx))^n dx$$

Mathematica [A]

time = 1.73, size = 0, normalized size = 0.00

$$\int (c + dx)^m (a + b \sec(e + fx))^n dx$$

Verification is not applicable to the result.

[In] Integrate[(c + d*x)^m*(a + b*Sec[e + f*x])^n,x]

[Out] Integrate[(c + d*x)^m*(a + b*Sec[e + f*x])^n, x]

Maple [A]

time = 0.38, size = 0, normalized size = 0.00

$$\int (dx + c)^m (a + b \sec(fx + e))^n dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\int ((d*x+c)^m * (a+b*\sec(f*x+e))^n, x)$

[Out] $\int ((d*x+c)^m * (a+b*\sec(f*x+e))^n, x)$

Maxima [A]

time = 0.00, size = 0, normalized size = 0.00

Failed to integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((d*x+c)^m * (a+b*\sec(f*x+e))^n, x, \text{algorithm}=\text{"maxima"})$

[Out] $\text{integrate}((d*x + c)^m * (b*\sec(f*x + e) + a)^n, x)$

Fricas [A]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((d*x+c)^m * (a+b*\sec(f*x+e))^n, x, \text{algorithm}=\text{"fricas"})$

[Out] $\text{integral}((d*x + c)^m * (b*\sec(f*x + e) + a)^n, x)$

Sympy [F(-1)] Timed out

time = 0.00, size = 0, normalized size = 0.00

Timed out

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((d*x+c)^{**m} * (a+b*\sec(f*x+e))^{**n}, x)$

[Out] Timed out

Giac [A]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((d*x+c)^m * (a+b*\sec(f*x+e))^n, x, \text{algorithm}=\text{"giac"})$

[Out] $\text{integrate}((d*x + c)^m * (b*\sec(f*x + e) + a)^n, x)$

Mupad [A]

time = 0.00, size = -1, normalized size = -0.04

$$\int \left(a + \frac{b}{\cos(e + f x)} \right)^n (c + d x)^m dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{int}((a + b/\cos(e + f*x))^n * (c + d*x)^m, x)$

[Out] $\text{int}((a + b/\cos(e + f*x))^n * (c + d*x)^m, x)$

$$\mathbf{3.45} \quad \int (c + dx)^m (a + b \sec(e + fx)) dx$$

Optimal. Leaf size=21

$$\text{Int}((c + dx)^m (a + b \sec(e + fx)), x)$$

[Out] Unintegrable((d*x+c)^m*(a+b*sec(f*x+e)),x)

Rubi [A]

time = 0.02, antiderivative size = 0, normalized size of antiderivative = 0.00, number of steps used = 0, number of rules used = 0, integrand size = 0, $\frac{\text{number of rules}}{\text{integrand size}}$ = 0.000, Rules used = {}

$$\int (c + dx)^m (a + b \sec(e + fx)) dx$$

Verification is not applicable to the result.

[In] Int[(c + d*x)^m*(a + b*Sec[e + f*x]),x]

[Out] Defer[Int][(c + d*x)^m*(a + b*Sec[e + f*x]), x]

Rubi steps

$$\int (c + dx)^m (a + b \sec(e + fx)) dx = \int (c + dx)^m (a + b \sec(e + fx)) dx$$

Mathematica [A]

time = 0.48, size = 0, normalized size = 0.00

$$\int (c + dx)^m (a + b \sec(e + fx)) dx$$

Verification is not applicable to the result.

[In] Integrate[(c + d*x)^m*(a + b*Sec[e + f*x]),x]

[Out] Integrate[(c + d*x)^m*(a + b*Sec[e + f*x]), x]

Maple [A]

time = 0.28, size = 0, normalized size = 0.00

$$\int (dx + c)^m (a + b \sec(fx + e)) dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\int ((d*x + c)^m * (a + b*\sec(f*x + e)), x)$

[Out] $\int ((d*x + c)^m * (a + b*\sec(f*x + e)), x)$

Maxima [A]

time = 0.00, size = 0, normalized size = 0.00

Failed to integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((d*x + c)^m * (a + b*\sec(f*x + e)), x, \text{algorithm}=\text{"maxima"})$

[Out] $2*b*\text{integrate}(((d*x + c)^m * \cos(2*f*x + 2*e)*\cos(f*x + e) + (d*x + c)^m * \sin(2*f*x + 2*e)*\sin(f*x + e) + (d*x + c)^m * \cos(f*x + e)) / (\cos(2*f*x + 2*e)^2 + \sin(2*f*x + 2*e)^2 + 2*\cos(2*f*x + 2*e) + 1), x) + (d*x + c)^{(m + 1)}*a/(d*(m + 1))$

Fricas [A]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((d*x + c)^m * (a + b*\sec(f*x + e)), x, \text{algorithm}=\text{"fricas"})$

[Out] $\text{integral}(b*\sec(f*x + e) + a)*(d*x + c)^m, x)$

Sympy [A]

time = 0.00, size = 0, normalized size = 0.00

$$\int (a + b \sec(e + fx)) (c + dx)^m \, dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((d*x + c)^{**m} * (a + b*\sec(f*x + e)), x)$

[Out] $\text{Integral}(a + b*\sec(e + fx))*(c + d*x)^{**m}, x)$

Giac [A]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((d*x + c)^m * (a + b*\sec(f*x + e)), x, \text{algorithm}=\text{"giac"})$

[Out] $\text{integrate}(b*\sec(f*x + e) + a)*(d*x + c)^m, x)$

Mupad [A]

time = 0.00, size = -1, normalized size = -0.05

$$\int \left(a + \frac{b}{\cos(e + f x)} \right) (c + d x)^m dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] int((a + b/cos(e + f*x))*(c + d*x)^m, x)

[Out] int((a + b/cos(e + f*x))*(c + d*x)^m, x)

3.46 $\int \frac{(c+dx)^m}{a+b\sec(e+fx)} dx$

Optimal. Leaf size=23

$$\text{Int}\left(\frac{(c+dx)^m}{a+b\sec(e+fx)}, x\right)$$

[Out] Unintegrable((d*x+c)^m/(a+b*sec(f*x+e)),x)

Rubi [A]

time = 0.04, antiderivative size = 0, normalized size of antiderivative = 0.00, number of steps used = 0, number of rules used = 0, integrand size = 0, $\frac{\text{number of rules}}{\text{integrand size}}$ = 0.000, Rules used = {}

$$\int \frac{(c+dx)^m}{a+b\sec(e+fx)} dx$$

Verification is not applicable to the result.

[In] Int[(c + d*x)^m/(a + b*Sec[e + f*x]),x]

[Out] Defer[Int][(c + d*x)^m/(a + b*Sec[e + f*x]), x]

Rubi steps

$$\int \frac{(c+dx)^m}{a+b\sec(e+fx)} dx = \int \frac{(c+dx)^m}{a+b\sec(e+fx)} dx$$

Mathematica [A]

time = 0.61, size = 0, normalized size = 0.00

$$\int \frac{(c+dx)^m}{a+b\sec(e+fx)} dx$$

Verification is not applicable to the result.

[In] Integrate[(c + d*x)^m/(a + b*Sec[e + f*x]),x]

[Out] Integrate[(c + d*x)^m/(a + b*Sec[e + f*x]), x]

Maple [A]

time = 0.24, size = 0, normalized size = 0.00

$$\int \frac{(dx+c)^m}{a+b\sec(fx+e)} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\int ((d*x+c)^m/(a+b*\sec(f*x+e)), x)$

[Out] $\int ((d*x+c)^m/(a+b*\sec(f*x+e)), x)$

Maxima [A]

time = 0.00, size = 0, normalized size = 0.00

Failed to integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((d*x+c)^m/(a+b*\sec(f*x+e)), x, \text{algorithm}=\text{"maxima"})$

[Out] $\text{integrate}((d*x + c)^m/(b*\sec(f*x + e) + a), x)$

Fricas [A]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((d*x+c)^m/(a+b*\sec(f*x+e)), x, \text{algorithm}=\text{"fricas"})$

[Out] $\text{integral}((d*x + c)^m/(b*\sec(f*x + e) + a), x)$

Sympy [A]

time = 0.00, size = 0, normalized size = 0.00

$$\int \frac{(c + dx)^m}{a + b \sec(e + fx)} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((d*x+c)^m/(a+b*\sec(f*x+e)), x)$

[Out] $\text{Integral}((c + d*x)^m/(a + b*\sec(e + f*x)), x)$

Giac [A]

time = 0.00, size = 0, normalized size = 0.00

could not integrate

Verification of antiderivative is not currently implemented for this CAS.

[In] $\text{integrate}((d*x+c)^m/(a+b*\sec(f*x+e)), x, \text{algorithm}=\text{"giac"})$

[Out] $\text{integrate}((d*x + c)^m/(b*\sec(f*x + e) + a), x)$

Mupad [A]

time = 0.00, size = -1, normalized size = -0.04

$$\int \frac{(c + dx)^m}{a + \frac{b}{\cos(e + fx)}} dx$$

Verification of antiderivative is not currently implemented for this CAS.

[In] $\int ((c + d*x)^m / (a + b/\cos(e + f*x)), x)$

[Out] $\int ((c + d*x)^m / (a + b/\cos(e + f*x)), x)$

Chapter 4

Appendix

Local contents

4.1	Download section	252
4.2	Listing of Grading functions	252

4.1 Download section

The following zip files contain the raw integrals used in this test.

Mathematica format Mathematica_syntax.zip

Maple and Mupad format Maple_syntax.zip

Sympy format SYMPY_syntax.zip

Sage math format SAGE_syntax.zip

4.2 Listing of Grading functions

The following are the current version of the grading functions used for grading the quality of the antiderivative with reference to the optimal antiderivative included in the test suite.

There is a version for Maple and for Mathematica/Rubi. There is a version for grading Sympy and version for use with Sagemath.

The following are links to the current source code.

The following are the listings of source code of the grading functions.

4.2.1 Mathematica and Rubi grading function

```
(* Original version thanks to Albert Rich emailed on 03/21/2017 *)
(* ::Package:: *)

(* Nasser: April 7, 2022. add second output which gives reason for the grade *)
(* Small rewrite of logic in main function to make it*)
(* match Maple's logic. No change in functionality otherwise*)

(* ::Subsection:: *)
(*GradeAntiderivative[result,optimal]*)

(* ::Text:: *)
(*If result and optimal are mathematical expressions, *)
(*      GradeAntiderivative[result,optimal] returns*)
(* "F" if the result fails to integrate an expression that*)
(*      is integrable*)
(* "C" if result involves higher level functions than necessary*)
(* "B" if result is more than twice the size of the optimal*)
(*      antiderivative*)
(* "A" if result can be considered optimal*)
```

```

GradeAntiderivative[result_,optimal_] := Module[{expnResult,expnOptimal,leafCountResult,leafC
expnResult = ExpnType[result];
expnOptimal = ExpnType[optimal];
leafCountResult = LeafCount[result];
leafCountOptimal = LeafCount[optimal];

(*Print["expnResult=",expnResult," expnOptimal=",expnOptimal];*)
If[expnResult<=expnOptimal,
  If[Not[FreeQ[result,Complex]], (*result contains complex*)
    If[Not[FreeQ[optimal,Complex]], (*optimal contains complex*)
      If[leafCountResult<=2*leafCountOptimal,
        finalresult={"A","none"}
        ,(*ELSE*)
        finalresult={"B","Both result and optimal contain complex but leaf count
      ]
      ,(*ELSE*)
      finalresult={"C","Result contains complex when optimal does not."}
    ]
    ,(*ELSE*)(*result does not contains complex*)
    If[leafCountResult<=2*leafCountOptimal,
      finalresult={"A","none"}
      ,(*ELSE*)
      finalresult={"B","Leaf count is larger than twice the leaf count of optimal. $"
    ]
    ]
  ,(*ELSE*)(*expnResult>expnOptimal*)
  If[FreeQ[result,Integrate] && FreeQ[result,Int],
    finalresult={"C","Result contains higher order function than in optimal. Order "<
    ,
    finalresult={"F","Contains unresolved integral."}
  ]
];
finalresult
]

(* ::Text:: *)
(*The following summarizes the type number assigned an *)
(*expression based on the functions it involves*)
(*1 = rational function*)
(*2 = algebraic function*)
(*3 = elementary function*)
(*4 = special function*)
(*5 = hypergeometric function*)
(*6 = appell function*)
(*7 = rootsum function*)
(*8 = integrate function*)

```

```
(*9 = unknown function*)
```

```
ExpnType[expn_] :=
  If[AtomQ[expn],
    1,
  If[ListQ[expn],
    Max[Map[ExpnType, expn]],
  If[Head[expn] === Power,
    If[IntegerQ[expn[[2]]],
      ExpnType[expn[[1]]],
    If[Head[expn[[2]]] === Rational,
      If[IntegerQ[expn[[1]]] || Head[expn[[1]]] === Rational,
        1,
      Max[ExpnType[expn[[1]]], 2]],
      Max[ExpnType[expn[[1]]], ExpnType[expn[[2]], 3]]],
    If[Head[expn] === Plus || Head[expn] === Times,
      Max[ExpnType[First[expn]], ExpnType[Rest[expn]]],
    If[ElementaryFunctionQ[Head[expn]],
      Max[3, ExpnType[expn[[1]]]],
    If[SpecialFunctionQ[Head[expn]],
      Apply[Max, Append[Map[ExpnType, Apply[List, expn]], 4]],
    If[HypergeometricFunctionQ[Head[expn]],
      Apply[Max, Append[Map[ExpnType, Apply[List, expn]], 5]],
    If[AppellFunctionQ[Head[expn]],
      Apply[Max, Append[Map[ExpnType, Apply[List, expn]], 6]],
    If[Head[expn] === RootSum,
      Apply[Max, Append[Map[ExpnType, Apply[List, expn]], 7]],
    If[Head[expn] === Integrate || Head[expn] === Int,
      Apply[Max, Append[Map[ExpnType, Apply[List, expn]], 8]],
    9]]]]]]]]]]]
```

```
ElementaryFunctionQ[func_] :=
  MemberQ[{  

    Exp, Log,  

    Sin, Cos, Tan, Cot, Sec, Csc,  

    ArcSin, ArcCos, ArcTan, ArcCot, ArcSec, ArcCsc,  

    Sinh, Cosh, Tanh, Coth, Sech, CsCh,  

    ArcSinh, ArcCosh, ArcTanh, ArcCoth, ArcSech, ArcCsCh  

  }, func]
```

```
SpecialFunctionQ[func_] :=
  MemberQ[{  

    Erf, Erfc, Erfi,  

    FresnelS, FresnelC,
```

```

ExpIntegralE, ExpIntegralEi, LogIntegral,
SinIntegral, CosIntegral, SinhIntegral, CoshIntegral,
Gamma, LogGamma, PolyGamma,
Zeta, PolyLog, ProductLog,
EllipticF, EllipticE, EllipticPi
},func]

HypergeometricFunctionQ[func_] :=
MemberQ[{Hypergeometric1F1, Hypergeometric2F1, HypergeometricPFQ}, func]

AppellFunctionQ[func_] :=
MemberQ[{AppellF1}, func]

```

4.2.2 Maple grading function

```

# File: GradeAntiderivative.mpl
# Original version thanks to Albert Rich emailed on 03/21/2017

#Nasser 03/22/2017 Use Maple leaf count instead since buildin
#Nasser 03/23/2017 missing 'ln' for ElementaryFunctionQ added
#Nasser 03/24/2017 corrected the check for complex result
#Nasser 10/27/2017 check for leafsize and do not call ExpnType()
#           if leaf size is "too large". Set at 500,000
#Nasser 12/22/2019 Added debug flag, added 'dilog' to special functions
#           see problem 156, file Apostol_Problems
#Nasser 4/07/2022 add second output which gives reason for the grade

GradeAntiderivative := proc(result,optimal)
local leaf_count_result,
      leaf_count_optimal,
      ExpnType_result,
      ExpnType_optimal,
      debug:=false;

      leaf_count_result:=leafcount(result);
      #do NOT call ExpnType() if leaf size is too large. Recursion problem
      if leaf_count_result > 500000 then
          return "B","result has leaf size over 500,000. Avoiding possible recursion issues
      fi;

      leaf_count_optimal := leafcount(optimal);
      ExpnType_result := ExpnType(result);
      ExpnType_optimal := ExpnType(optimal);

```

```

if debug then
    print("ExpnType_result",ExpnType_result," ExpnType_optimal=",ExpnType_optimal);
fi;

# If result and optimal are mathematical expressions,
# GradeAntiderivative[result,optimal] returns
# "F" if the result fails to integrate an expression that
# is integrable
# "C" if result involves higher level functions than necessary
# "B" if result is more than twice the size of the optimal
# antiderivative
# "A" if result can be considered optimal

#This check below actually is not needed, since I only
#call this grading only for passed integrals. i.e. I check
#for "F" before calling this. But no harm of keeping it here.
#just in case.

if not type(result,freeof('int')) then
    return "F","Result contains unresolved integral";
fi;

if ExpnType_result<=ExpnType_optimal then
    if debug then
        print("ExpnType_result<=ExpnType_optimal");
    fi;
    if is_contains_complex(result) then
        if is_contains_complex(optimal) then
            if debug then
                print("both result and optimal complex");
            fi;
            if leaf_count_result<=2*leaf_count_optimal then
                return "A","");
            else
                return "B",cat("Both result and optimal contain complex but leaf count of r
                                convert(leaf_count_result,string)," vs. $2 (
                                convert(leaf_count_optimal,string)," ) = ",convert(2*leaf_c
                end if
            else #result contains complex but optimal is not
                if debug then
                    print("result contains complex but optimal is not");
                fi;
                return "C","Result contains complex when optimal does not.";
            fi;
        else # result do not contain complex
    fi;
fi;

```

```

        # this assumes optimal do not as well. No check is needed here.
        if debug then
            print("result do not contain complex, this assumes optimal do not as well")
        fi;
        if leaf_count_result<=2*leaf_count_optimal then
            if debug then
                print("leaf_count_result<=2*leaf_count_optimal");
            fi;
            return "A","");
        else
            if debug then
                print("leaf_count_result>2*leaf_count_optimal");
            fi;
            return "B",cat("Leaf count of result is larger than twice the leaf count of optimal",
                           convert(leaf_count_result,string)," vs. $2(",
                           convert(leaf_count_optimal,string),")=",convert(2*leaf_count_optimal,string));
        fi;
    fi;
else #ExpnType(result) > ExpnType(optimal)
    if debug then
        print("ExpnType(result) > ExpnType(optimal)");
    fi;
    return "C",cat("Result contains higher order function than in optimal. Order ",
                   convert(ExpnType_result,string)," vs. order ",
                   convert(ExpnType_optimal,string),".");
fi;

end proc:

#
# is_contains_complex(result)
# takes expressions and returns true if it contains "I" else false
#
#Nasser 032417
is_contains_complex:= proc(expression)
    return (has(expression,I));
end proc:

# The following summarizes the type number assigned an expression
# based on the functions it involves
# 1 = rational function
# 2 = algebraic function
# 3 = elementary function
# 4 = special function
# 5 = hypergeometric function
# 6 = appell function
# 7 = rootsum function

```

```

# 8 = integrate function
# 9 = unknown function

ExpnType := proc(expn)
  if type(expn,'atomic') then
    1
  elif type(expn,'list') then
    apply(max,map(ExpnType,expn))
  elif type(expn,'sqrt') then
    if type(op(1,expn),'rational') then
      1
    else
      max(2,ExpnType(op(1,expn)))
    end if
  elif type(expn,'`^`) then
    if type(op(2,expn),'integer') then
      ExpnType(op(1,expn))
    elif type(op(2,expn),'rational') then
      if type(op(1,expn),'rational') then
        1
      else
        max(2,ExpnType(op(1,expn)))
      end if
    else
      max(3,ExpnType(op(1,expn)),ExpnType(op(2,expn)))
    end if
  elif type(expn,'`+`) or type(expn,'`*`) then
    max(ExpnType(op(1,expn)),max(ExpnType(rest(expn))))
  elif ElementaryFunctionQ(op(0,expn)) then
    max(3,ExpnType(op(1,expn)))
  elif SpecialFunctionQ(op(0,expn)) then
    max(4,apply(max,map(ExpnType,[op(expn)])))
  elif HypergeometricFunctionQ(op(0,expn)) then
    max(5,apply(max,map(ExpnType,[op(expn)])))
  elif AppellFunctionQ(op(0,expn)) then
    max(6,apply(max,map(ExpnType,[op(expn)])))
  elif op(0,expn)='int' then
    max(8,apply(max,map(ExpnType,[op(expn)]))) else
  9
  end if
end proc:

ElementaryFunctionQ := proc(func)
  member(func,[
    exp,log,ln,
    sin,cos,tan,cot,sec,csc,

```

```

arcsin,arccos,arctan,arccot,arcsec,arccsc,
sinh,cosh,tanh,coth,sech,csch,
arcsinh,arccosh,arctanh,arccoth,arcsech,arccsch])
end proc:

SpecialFunctionQ := proc(func)
  member(func,[
    erf,erfc,erfi,
    FresnelS,FresnelC,
    Ei,Ei,Li,Si,Ci,Shi,Chi,
    GAMMA,lnGAMMA,Psi,Zeta,polylog,dilog,LambertW,
    EllipticF,EllipticE,EllipticPi])
end proc:

HypergeometricFunctionQ := proc(func)
  member(func,[Hypergeometric1F1,hypergeom,HypergeometricPFQ])
end proc:

AppellFunctionQ := proc(func)
  member(func,[AppellF1])
end proc:

# u is a sum or product.  rest(u) returns all but the
# first term or factor of u.
rest := proc(u) local v;
  if nops(u)=2 then
    op(2,u)
  else
    apply(op(0,u),op(2..nops(u),u))
  end if
end proc:

#leafcount(u) returns the number of nodes in u.
#Nasser 3/23/17 Replaced by build-in leafCount from package in Maple
leafcount := proc(u)
  MmaTranslator[Mma][LeafCount](u);
end proc:

```

4.2.3 Sympy grading function

```
#Dec 24, 2019. Nasser M. Abbasi:
#          Port of original Maple grading function by
#          Albert Rich to use with Sympy/Python
#Dec 27, 2019 Nasser. Added `RootSum`. See problem 177, Timofeev file
#          added 'exp_polar'
from sympy import *

def leaf_count(expr):
    #sympy do not have leaf count function. This is approximation
    return round(1.7*count_ops(expr))

def is_sqrt(expr):
    if isinstance(expr,Pow):
        if expr.args[1] == Rational(1,2):
            return True
        else:
            return False
    else:
        return False

def is_elementary_function(func):
    return func in [exp,log,ln,sin,cos,tan,cot,sec,csc,
                   asin,acos,atan,acot,asec,acsc,sinh,cosh,tanh,coth,sech,csch,
                   asinh,acosh,atanh,acoth,asech,acsch
                   ]

def is_special_function(func):
    return func in [ erf,erfc,erfi,
                    fresnels,fresnelc,Ei,Ei,Li,Si,Ci,Shi,Chi,
                    gamma,loggamma,digamma,zeta,polylog,LambertW,
                    elliptic_f,elliptic_e,elliptic_pi,exp_polar
                    ]

def is_hypergeometric_function(func):
    return func in [hyper]

def is_appell_function(func):
    return func in [appellf1]

def is_atom(expn):
    try:
        if expn.isAtom or isinstance(expn,int) or isinstance(expn,float):
            return True
        else:
            return False
    except:
        return False
```

```

except AttributeError as error:
    return False

def expnType(expn):
    debug=False
    if debug:
        print("expn=",expn,"type(expn)=",type(expn))

    if is_atom(expn):
        return 1
    elif isinstance(expn,list):
        return max(map(expnType, expn))  #apply(max,map(ExpnType,expn))
    elif is_sqrt(expn):
        if isinstance(expn.args[0],Rational): #type(op(1,expn),'rational')
            return 1
        else:
            return max(2,expnType(expn.args[0])) #max(2,ExpnType(op(1,expn)))
    elif isinstance(expn,Pow):  #type(expn,'`^`)
        if isinstance(expn.args[1],Integer): #type(op(2,expn),'integer')
            return expnType(expn.args[0]) #ExpnType(op(1,expn))
        elif isinstance(expn.args[1],Rational): #type(op(2,expn),'rational')
            if isinstance(expn.args[0],Rational): #type(op(1,expn),'rational')
                return 1
            else:
                return max(2,expnType(expn.args[0])) #max(2,ExpnType(op(1,expn)))
        else:
            return max(3,expnType(expn.args[0]),expnType(expn.args[1])) #max(3,ExpnType(op(1,expn)),ExpnT
    elif isinstance(expn,Add) or isinstance(expn,Mul): #type(expn,'`+') or type(expn,'`*`)
        m1 = expnType(expn.args[0])
        m2 = expnType(list(expn.args[1:]))
        return max(m1,m2) #max(ExpnType(op(1,expn)),max(ExpnType(rest(expn))))
    elif is_elementary_function(expn.func): #ElementaryFunctionQ(op(0,expn))
        return max(3,expnType(expn.args[0])) #max(3,ExpnType(op(1,expn)))
    elif is_special_function(expn.func): #SpecialFunctionQ(op(0,expn))
        m1 = max(map(expnType, list(expn.args)))
        return max(4,m1) #max(4,apply(max,map(ExpnType,[op(expn)])))
    elif is_hypergeometric_function(expn.func): #HypergeometricFunctionQ(op(0,expn))
        m1 = max(map(expnType, list(expn.args)))
        return max(5,m1) #max(5,apply(max,map(ExpnType,[op(expn)])))
    elif is_appell_function(expn.func):
        m1 = max(map(expnType, list(expn.args)))
        return max(6,m1) #max(5,apply(max,map(ExpnType,[op(expn)])))
    elif isinstance(expn,RootSum):
        m1 = max(map(expnType, list(expn.args))) #Apply[Max,Append[Map[ExpnType,Apply[List,expn]],7]],
        return max(7,m1)
    elif str(expn).find("Integral") != -1:

```

```

m1 = max(map(expnType, list(expn.args)))
    return max(8,m1)  #max(5,apply(max,map(ExpnType,[op(expn)])))
else:
    return 9

#main function
def grade_antiderivative(result,optimal):

#print ("Enter grade_antiderivative for sageMath")
#print("Enter grade_antiderivative, result=",result, " optimal=",optimal)

leaf_count_result = leaf_count(result)
leaf_count_optimal = leaf_count(optimal)

#print("leaf_count_result=",leaf_count_result)
#print("leaf_count_optimal=",leaf_count_optimal)

expnType_result = expnType(result)
expnType_optimal = expnType(optimal)

if str(result).find("Integral") != -1:
    grade = "F"
    grade_annotation = ""
else:
    if expnType_result <= expnType_optimal:
        if result.has(I):
            if optimal.has(I): #both result and optimal complex
                if leaf_count_result <= 2*leaf_count_optimal:
                    grade = "A"
                    grade_annotation = ""
                else:
                    grade = "B"
                    grade_annotation ="Both result and optimal contain complex but leaf count of result is larger than twice the leaf count of optimal."
            else: #result contains complex but optimal is not
                grade = "C"
                grade_annotation ="Result contains complex when optimal does not."
        else: # result do not contain complex, this assumes optimal do not as well
            if leaf_count_result <= 2*leaf_count_optimal:
                grade = "A"
                grade_annotation = ""
            else:
                grade = "B"
                grade_annotation ="Leaf count of result is larger than twice the leaf count of optimal. "+str(leaf_count(result)-2*leaf_count(optimal))
    else:
        grade = "C"
        grade_annotation ="Result contains higher order function than in optimal. Order "+str(ExpnType_result-ExpnType_optimal)

```

```
#print("Before returning. grade=",grade, " grade_annotation=",grade_annotation)

return grade, grade_annotation
```

4.2.4 SageMath grading function

```
#Dec 24, 2019. Nasser: Ported original Maple grading function by
#           Albert Rich to use with Sagemath. This is used to
#           grade Fricas, Giac and Maxima results.
#Dec 24, 2019. Nasser: Added 'exp_integral_e' and 'sng', 'sin_integral'
#           'arctan2','floor','abs','log_integral'
#June 4, 2022 Made default grade_annotation "none" instead of "" due
#           issue later when reading the file.
#July 14, 2022. Added ellipticF. This is until they fix sagemath, then remove it.

from sage.all import *
from sage.symbolic.operators import add_vararg, mul_vararg

debug=False;

def tree_size(expr):
    """
    Return the tree size of this expression.
    """
    #print("Enter tree_size, expr is ",expr)

    if expr not in SR:
        # deal with lists, tuples, vectors
        return 1 + sum(tree_size(a) for a in expr)
    expr = SR(expr)
    x, aa = expr.operator(), expr.operands()
    if x is None:
        return 1
    else:
        return 1 + sum(tree_size(a) for a in aa)

def is_sqrt(expr):
    if expr.operator() == operator.pow:  #isinstance(expr,Pow):
        if expr.operands()[1]==1/2: #expr.args[1] == Rational(1,2):
            if debug: print ("expr is sqrt")
            return True
        else:
            return False
    else:
        return False
```

```

def is_elementary_function(func):
    #debug=False
    m = func.name() in ['exp','log','ln',
        'sin','cos','tan','cot','sec','csc',
        'arcsin','arccos','arctan','arccot','arcsec','arccsc',
        'sinh','cosh','tanh','coth','sech','csch',
        'arcsinh','arccosh','arctanh','arccoth','arcsech','arccsch','sgn',
        'arctan2','floor','abs'
    ]
    if debug:
        if m:
            print ("func ", func , " is elementary_function")
        else:
            print ("func ", func , " is NOT elementary_function")

    return m

def is_special_function(func):
    #debug=False
    if debug:
        print ("type(func)=", type(func))

    m= func.name() in ['erf','erfc','erfi','fresnel_sin','fresnel_cos','Ei',
        'Ei','Li','Si','sin_integral','Ci','cos_integral','Shi','sinh_integral',
        'Chi','cosh_integral','gamma','log_gamma','psi,zeta',
        'polylog','lambert_w','elliptic_f','elliptic_e','ellipticF',
        'elliptic_pi','exp_integral_e','log_integral']

    if debug:
        print ("m=",m)
    if m:
        print ("func ", func , " is special_function")
    else:
        print ("func ", func , " is NOT special_function")

    return m

def is_hypergeometric_function(func):
    return func.name() in ['hypergeometric','hypergeometric_M','hypergeometric_U']

def is_appell_function(func):
    return func.name() in ['hypergeometric']  #[appellf1] can't find this in sage

```

```

def is_atom(expn):

    #debug=False
    if debug:
        print ("Enter is_atom, expn=",expn)

    if not hasattr(expn, 'parent'):
        return False

#thanks to answer at https://ask.sagemath.org/question/49179/what-is-sagemath-equivalent-to-atomic-
try:
    if expn.parent() is SR:
        return expn.operator() is None
    if expn.parent() in (ZZ, QQ, AA, QQbar):
        return expn in expn.parent() # Should always return True
    if hasattr(expn.parent(), "base_ring") and hasattr(expn.parent(), "gens"):
        return expn in expn.parent().base_ring() or expn in expn.parent().gens()

    return False

except AttributeError as error:
    print("Exception,AttributeError in is_atom")
    print ("caught exception" , type(error).__name__)
    return False


def expnType(expn):

    if debug:
        print (">>>>Enter expnType, expn=", expn)
        print (">>>>is_atom(expn)=", is_atom(expn))

    if is_atom(expn):
        return 1
    elif type(expn)==list: #isinstance(expn,list):
        return max(map(expnType, expn)) #apply(max,map(ExpnType,expn))
    elif is_sqrt(expn):
        if type(expn.operands()[0])==Rational: #type(isinstance(expn.args[0],Rational):
            return 1
        else:
            return max(2,expnType(expn.operands()[0])) #max(2,expnType(expn.args[0]))
    elif expn.operator() == operator.pow: #isinstance(expn,Pow)
        if type(expn.operands()[1])==Integer: #isinstance(expn.args[1],Integer)
            return expnType(expn.operands()[0]) #expnType(expn.args[0])
        elif type(expn.operands()[1])==Rational: #isinstance(expn.args[1],Rational)
            if type(expn.operands()[0])==Rational: #isinstance(expn.args[0],Rational)

```

```

        return 1
    else:
        return max(2,expnType(expn.operands()[0])) #max(2,expnType(expn.args[0]))
    else:
        return max(3,expnType(expn.operands()[0]),expnType(expn.operands()[1])) #max(3,expnType(expn.op
elif expn.operator() == add_vararg or expn.operator() == mul_vararg: #isinstance(expn,Add) or isinstan
    m1 = expnType(expn.operands()[0]) #expnType(expn.args[0])
    m2 = expnType(expn.operands()[1:]) #expnType(list(expn.args[1:]))
    return max(m1,m2) #max(ExpnType(op(1,expn)),max(ExpnType(rest(expn))))
elif is_elementary_function(expn.operator()): #is_elementary_function(expn.func)
    return max(3,expnType(expn.operands()[0]))
elif is_special_function(expn.operator()): #is_special_function(expn.func)
    m1 = max(map(expnType, expn.operands())) #max(map(expnType, list(expn.args)))
    return max(4,m1) #max(4,m1)
elif is_hypergeometric_function(expn.operator()): #is_hypergeometric_function(expn.func)
    m1 = max(map(expnType, expn.operands())) #max(map(expnType, list(expn.args)))
    return max(5,m1) #max(5,m1)
elif is_appell_function(expn.operator()):
    m1 = max(map(expnType, expn.operands())) #max(map(expnType, list(expn.args)))
    return max(6,m1) #max(6,m1)
elif str(expn).find("Integral") != -1: #this will never happen, since it
    #is checked before calling the grading function that is passed.
    #but kept it here.
    m1 = max(map(expnType, expn.operands())) #max(map(expnType, list(expn.args)))
    return max(8,m1) #max(5,apply(max,map(ExpnType,[op(expn)])))
else:
    return 9

#main function
def grade_antiderivative(result,optimal):

    if debug:
        print ("Enter grade_antiderivative for sagemath")
        print("Enter grade_antiderivative, result=",result)
        print("Enter grade_antiderivative, optimal=",optimal)
        print("type(anti)=",type(result))
        print("type(optimal)=",type(optimal))

        leaf_count_result = tree_size(result) #leaf_count(result)
        leaf_count_optimal = tree_size(optimal) #leaf_count(optimal)

        #if debug: print ("leaf_count_result=", leaf_count_result, "leaf_count_optimal=",leaf_count_optimal)

    expnType_result = expnType(result)
    expnType_optimal = expnType(optimal)

```

```

if debug: print ("expnType_result=", expnType_result, "expnType_optimal=",expnType_optimal)

if expnType_result <= expnType_optimal:
    if result.has(I):
        if optimal.has(I): #both result and optimal complex
            if leaf_count_result <= 2*leaf_count_optimal:
                grade = "A"
                grade_annotation = "none"
            else:
                grade = "B"
                grade_annotation = "Both result and optimal contain complex but leaf count of result is larger than optimal"
        else: #result contains complex but optimal is not
            grade = "C"
            grade_annotation = "Result contains complex when optimal does not."
    else: # result do not contain complex, this assumes optimal do not as well
        if leaf_count_result <= 2*leaf_count_optimal:
            grade = "A"
            grade_annotation = "none"
        else:
            grade = "B"
            grade_annotation = "Leaf count of result is larger than twice the leaf count of optimal. "+str(leaf_count_result)
    else:
        grade = "C"
        grade_annotation = "Result contains higher order function than in optimal. Order "+str(expnType_result)

print("Before returning. grade=",grade, " grade_annotation=",grade_annotation)

return grade, grade_annotation

```